

BASE 03

BASE is a rectangular, recessed, in-grade upright made of stainless steel, that is suitable for outdoor installation in the ground and/or on the floor through a polyethylene outer casing. BASE 03 versions have 3 LEDs, horizontal or vertical asymmetrical reflectors, and optics from 21°, 45° and 65°. Available with 3 Hard Coat Treatment finishes.



BASE V-03



BASE H-03

Fixture Dimensions - See page 2

TECHNICAL DATA

Wattage	15W (BASE V-03, BASE H-03)
Power Supply	Remote 350mA, not included. See page 2.
Dimming	See Power Supplies
Construction	Body/Frame: AISI 316L Stainless Steel Lens: 0.31" (8mm) Extra-clear Tempered Glass
CCT	2200K, 2700K, 3000K, 4000K
BUG Rating	B0-U5-G0 (V-03) B0-U5-G0 (H-03)
CRI	>80
Delivered Lumens	1650 lm (3000K) 1839 lm (4000K)
Efficacy	110 lm/W (3000K) 122.6 lm/W (4000K)
Optics	21°, 45°, 65°
Lumen Maintenance	L80/B10 @100.000h Ta=25°C
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	10.91" l x 5.71" w x 3.6" h
IP Rating	IP66, IP67
Impact Resistance	IK08
Warranty	10 Years Against Corrosion 5 Years on Electrical Components

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

ORDERING INFORMATION


Example: SPT1023036B.US. Power Supplies / Accessories sold separately.

				.US
Model No.	CCT	Optics	Finishes	
SPT10230 (V-03)	1 - 2200K	2 - 21°	N - Inox Natural	.US
SPT10250 (H-03)	2 - 2700K	4 - 45°	G - Inox Graphite	
	3 - 3000K	6 - 65°	B - Inox Bronze	
	4 - 4000K			


Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS



V-03



H-03

FINISHES



Inox Natural



Inox Natural



Inox Graphite



Inox Graphite



Inox Bronze



Inox Bronze

V-03

H-03

ACCESSORIES



PT54000
Outer Casing

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2, DAMP	1-1
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2, DAMP	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-1
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W, Class 2	1-4

For other power supply options consult factory.


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


NOTE: All photometry is 3000K

Maximum Candela = 8081

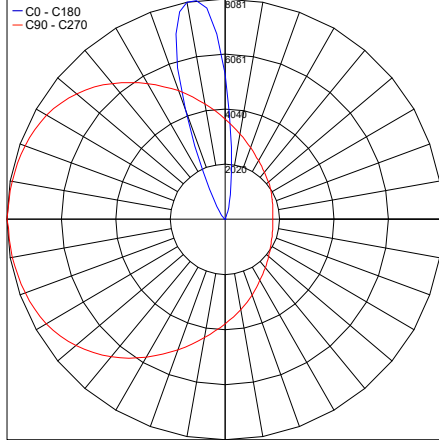


PHOTOMETRIC FILENAME : BASE V03 30K 21° BLACK - PT1023032B.IES

Maximum Candela = 2738.9

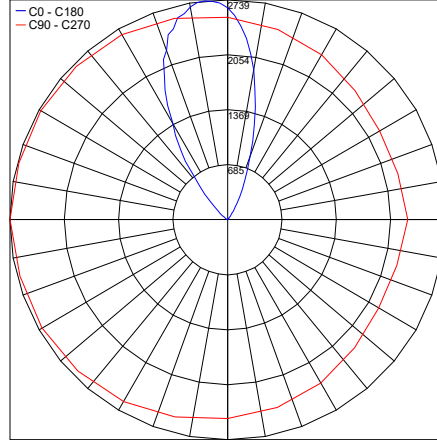


PHOTOMETRIC FILENAME : BASE V03 30K 45° BLACK - PT1023034B.IES

Maximum Candela = 1580.4

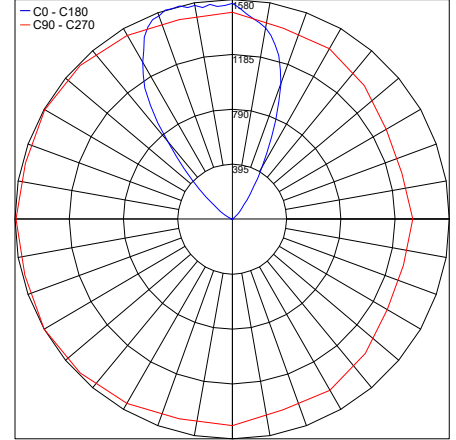


PHOTOMETRIC FILENAME : BASE V03 30K 65° BLACK - PT1023036B.IES

Maximum Candela = 8081

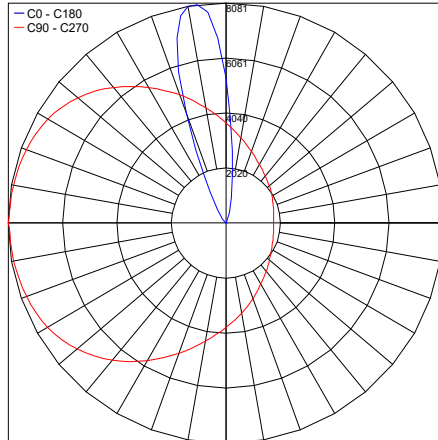


PHOTOMETRIC FILENAME : BASE H03 30K 21° BLACK - PT1025032B.IES

Maximum Candela = 2738.9

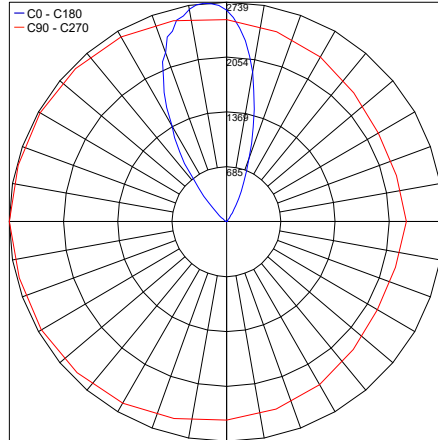

PHOTOMETRIC FILENAME : BASE H03 30K 45° BLACK - PT1025034B.IES

Maximum Candela = 1580.4

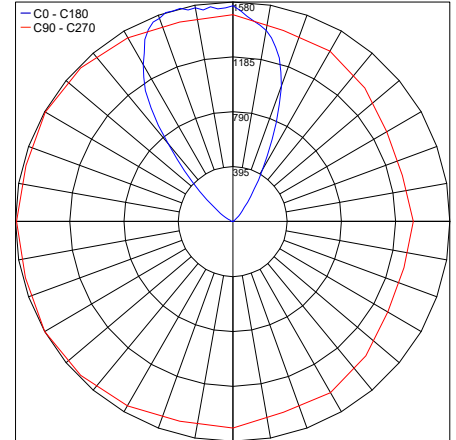

PHOTOMETRIC FILENAME : BASE H03 30K 65° BLACK - PT1025036B.IES

Job Name/Date:

Fixture Type Designation: