

EGO Floodlight


EGO Floodlights are round adjustable projectors with a marine grade stainless steel 316L housing (galvanized treatment on request) making it suitable for a variety of outdoor installations. It is available in 3 color temperatures and 3 optics options.



TECHNICAL DATA

Wattage	9W
Power Supply	Remote 200mA, not included - See page 2
Construction	Housing: Marine Grade Stainless Steel 316L Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U5-G0 (12°, 38° - 3000K) B0-U4-G0 (24° - 3000K)
CRI	>80
Delivered Lumens	1124 lm (3000K)
Efficacy	124.9 lm/W
Optics	12°, 24°, 38°
Finishes	Stainless Steel ASIS 316L
Lumen Maintenance	55,000 hrs (Ta 35°C)
Fixture Dimensions	Ø4.53" x 4.72" x 6.46" h
IP Rating	IP67
Impact Resistance	IK07

Fixture Dimensions

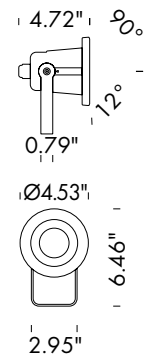

ORDERING INFORMATION


Example: F40401.6.3.12.US. Power Supplies / Accessories ordered separately.

F40401	6			.US
Model No.	Finish	CCT	Optics	
F40401 - EGO	6 - ASIS 316L Stainless Steel	2 - 2700K 3 - 3000K 4 - 4000K	11 - 12° Spot 12 - 24° Medium 13 - 38° Wide	.US

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

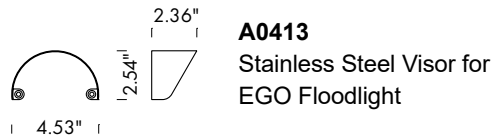

SUGGESTED POWER SUPPLIES


200mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 200mA, 20W, Class 2, DAMP	1-1
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 200mA, 50W, Class 2, DAMP	1-1
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 200mA, 100W, Class 2	1-4

For other power supply options consult factory.

PHOTOMETRIC DATA

Note all Photometry is 3000K

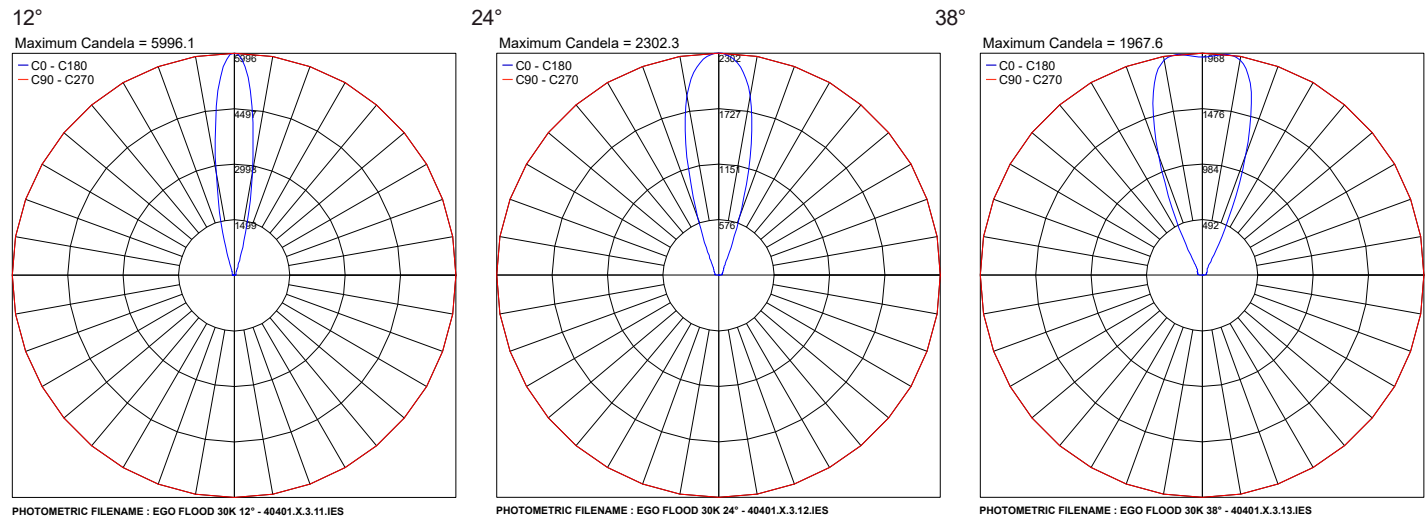

Job Name/Date:

Fixture Type Designation: