


EGO Recessed are round in-grade uplights with a marine grade stainless steel 316L housing (galvanized treatment on request) making it suitable for a variety of outdoor installations. They are available in 3 color temperatures and 4 optics options.



## TECHNICAL DATA

<b>Wattage</b>	9W
<b>Power Supply</b>	Remote 200mA, not included - See page 2
<b>Construction</b>	Housing: Marine Grade Stainless Steel 316L Lens: Extra Clear Tempered Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>BUG Rating</b>	B0-U5-G0 (EGO 12°, 38° - 3000K) B0-U4-G0 (EGO 24°, Wall Washer - 3000K)
<b>CRI</b>	>80
<b>Delivered Lumens</b>	1134 lm (3000K)
<b>Efficacy</b>	126 lm/W
<b>Optics</b>	12°, 24° 38°, Wall Washer
<b>Finishes</b>	Stainless Steel ASIS 316L
<b>Lumen Maintenance</b>	55,000 hrs (Ta 35°C)
<b>Fixture Dimensions</b>	Ø5.20" x 4.76"
<b>IP Rating</b>	IP67
<b>Impact Resistance</b>	IK08

Fixture Dimensions

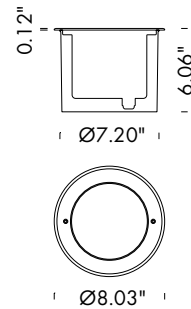

## ORDERING INFORMATION

Example: F10401.6.3.12.US. Power Supplies ordered separately.

F10401	6			.US
<b>Model No.</b>	<b>Finish</b>	<b>CCT</b>	<b>Optics</b>	
F10401 - EGO	6 - ASIS 316L Stainless Steel	2 - 2700K 3 - 3000K 4 - 4000K	11 - 12° Spot 12 - 24° Medium 13 - 38° Wide 07 - Wall Washer	.US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

200mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 200mA, 20W, Class 2, DAMP	1-1
<a href="#">PPLT00309-P</a>	0-10V Dimming to 0.1%	120-277VAC to 200mA, 50W, Class 2, DAMP	1-1
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 200mA, 100W, Class 2	1-4


For other power supply options consult factory.

## PHOTOMETRIC DATA

Note all Photometry is 3000K

12°


Maximum Candela = 6052.3

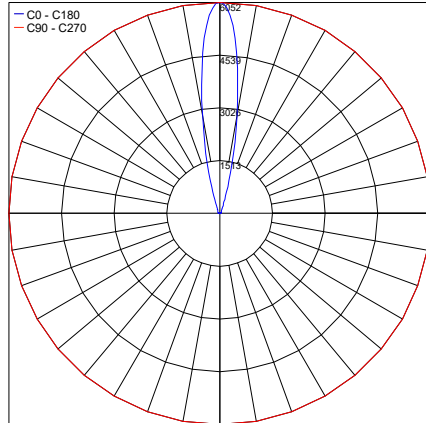

PHOTOMETRIC FILENAME : EGO RECESSED 30K 12° - 10401.X.3.11.IES

24°


Maximum Candela = 2302.3

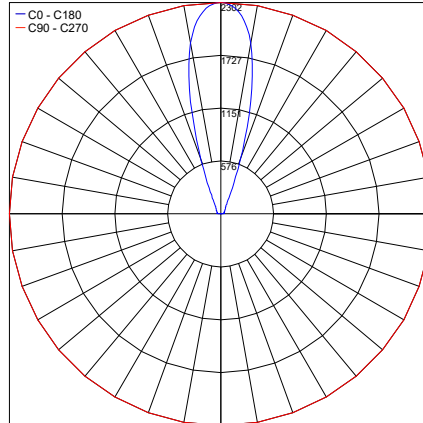

PHOTOMETRIC FILENAME : EGO RECESSED 30K 24° - 10401.X.3.12.IES

38°


Maximum Candela = 1967.6

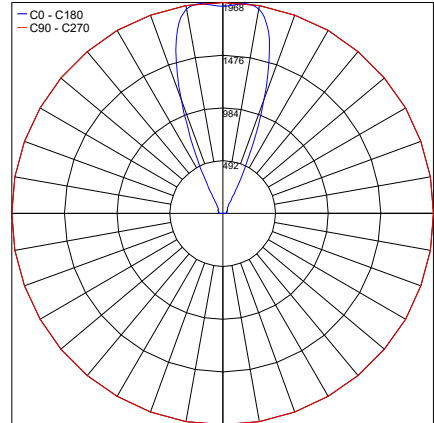

PHOTOMETRIC FILENAME : EGO RECESSED 30K 38° - 10401.X.3.13.IES

## Wall Washer

Maximum Candela = 652.6

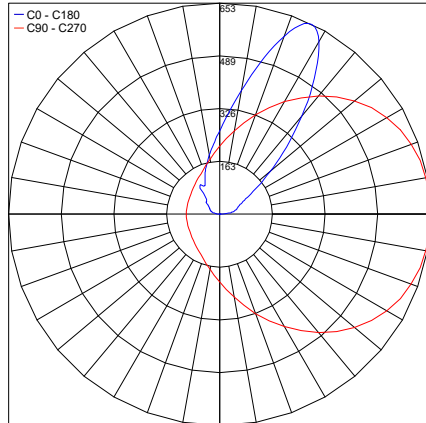

PHOTOMETRIC FILENAME : EGO RECESSED 30K WALL WASHER - 10401.X.3.07.IES

Job Name/Date:

Fixture Type Designation: