


Goccia is a family of outdoor step lights that are ideal for accent and pathway guidance lighting. They are available in round or square versions, 3 sizes, static white or RGB, and that can be installed flush with the surface using an outer casing, or wall mounted. Goccia 1.8 is the Ø1.0" round, RGB version. (Not suitable for use in immersion in swimming pools or fountains).



TECHNICAL DATA

Wattage / Input	1.2W (12VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Polyurethane Resin Cable Length: 4.92' standard (16.4" available)
CCT	RGB
BUG Rating	B0-U1-G0
Delivered Lumens	4 lm: (R) 1 lm, (G) 2 lm, (B) 1 lm
Efficacy	3.3 lm/W (R) 0.83 lm/W, (G) 1.67 lm/W, (B) 0.83 lm/W
Optics	Diffuse
Fixture Dimensions	Ø1.02" x 0.98" h
Fixture Weight	0.23 lbs
LED Source	1 Mid-power, Full-color LED
Lumen Maintenance	L80, B10 >50,000 hrs (Ta 25°C)
Color Consistency	—
Operating Temp.	-20°C to +45°C
IP Rating	IP65, IP68
IK Rating	IK10
Walkover	Yes

Fixture Dimensions



ORDERING INFORMATION

Example: GA1850P0060DR or GA1850P0060DR-1. Accessories / Power Supplies ordered separately.

GA1850	OP00	6	0D	R	
Model No.		CCT	Optics	Finish	Cable Length
GA1850	OP00	6 - RGB	0D - Diffuse	R - Resin	4.92' standard 1 - 16.40'

Job Name/Date:

Fixture Type Designation:


SUGGESTED POWER SUPPLIES

12VDC


Part Number	Description	Input/Output	# of Fixtures
PPLT00162	Non-Dim	120-277VAC to 12VDC, 20W, Class 2, IP64	1-13
PPLT00652	0-10V Dimming	120-277VAC to 12VDC, 30W, Class 2	1-20
PPLT00654	0-10V Dimming	120-277VAC to 12VDC, 50W, Class 2	1-33
PPLT00134	Non-Dim	120-277VAC to 12VDC, 60W, Class 2, IP64	1-40

For other power supply options consult factory.

ACCESSORIES - Installation

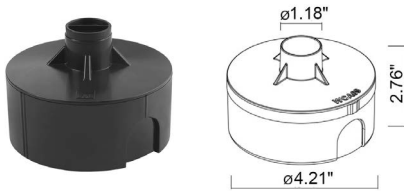


WCA09
Outer Casing
For in-grade use



WCA25
Outer Casing
For Plasterboard

PHOTOMETRIC DATA

Note: All photometry is 3000K

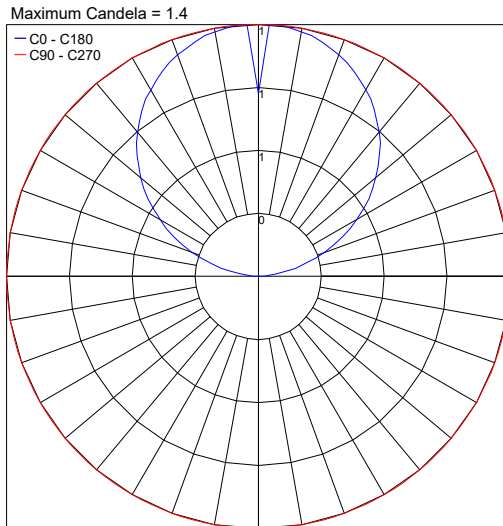

PHOTOMETRIC FILENAME : NEW_GOCCIA_1.8_D_RGB_1.2W_12VDC.IES

Job Name/Date:

Fixture Type Designation: