


Goccia is a family of outdoor step lights that are ideal for accent and pathway guidance lighting. They are available in round or square versions, 3 sizes, static white or RGB, and that can be installed flush with the surface using an outer casing, or wall mounted. Goccia 3.8 is the Ø2.8" round, RGB version. (Not suitable for use in immersion in swimming pools or fountains).



## TECHNICAL DATA

<b>Wattage / Input</b>	3.5W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Polyurethane Resin Cable Length: 4.92' standard (16.4" available)
<b>CCT</b>	RGB
<b>BUG Rating</b>	B0-U3-G0
<b>Delivered Lumens</b>	50 lm: (R) 15 lm, (G) 34 lm, (B) 7 lm
<b>Efficacy</b>	14.3 lm/W: (R) 4.29 lm/W, (G) 9.71 lm/W, (B) 2 lm/W
<b>Optics</b>	Diffuse
<b>Fixture Dimensions</b>	Ø2.76" x 1.42" h
<b>Fixture Weight</b>	0.47 lbs
<b>LED Source</b>	12 Mid-power, Full-color LEDs
<b>Lumen Maintenance</b>	L80, B10 >50,000 hrs (Ta 25°C)
<b>Color Consistency</b>	—
<b>Operating Temp.</b>	-20°C to +45°C
<b>IP Rating</b>	IP65, IP68
<b>IK Rating</b>	IK10
<b>Walkover</b>	Yes

Fixture Dimensions

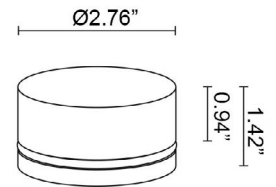

## ORDERING INFORMATION

Example: GA3800P0060DR or GA3800P0060DR-1. Accessories / Power Supplies ordered separately.

GA3800	OP00	6	0D	R	
<b>Model No.</b>		<b>CCT</b>	<b>Optics</b>	<b>Finish</b>	<b>Cable Length</b>
GA3800	OP00	6 - RGB	0D - Diffused	R - Resin	4.92' standard 1 - 16.40'

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC - *For use as in-grade uplights*

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00288-P12</a>	DMX / RDM (Field Addressable) / DALI (4 Channels)	120-277VAC to 24VDC, 100W, Class 2	1-20


## SUGGESTED POWER SUPPLIES

24VDC - *For use in fountains and swimming pools*


Part Number	Description	Input/Output	# of Fixtures
<a href="#">FPV-060EL0012</a>	DMX / RDM (Field Addressable) / DALI (4 Channels)	120-277VAC to 24VDC, 60W, Class 2, NEMA 4	1-20

For other power supply options consult factory.

## ACCESSORIES - Installation



**WCA07**  
Outer Casing  
*For in-grade use*



**WCA27**  
Outer Casing  
*For Plasterboard*




**WL0100**  
Suction Cup

## PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 17.5

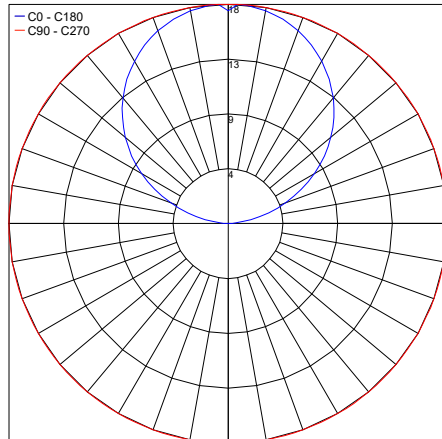

PHOTOMETRIC FILENAME : NEW\_GOCCIA\_3.8\_D\_RGB\_3.5W\_24VDC.IES

Job Name/Date:

Fixture Type Designation: