


Goccia is a family of outdoor step lights that are ideal for accent and pathway guidance lighting. They are available in round or square versions, 3 sizes, static white or RGB, and that can be installed flush with the surface using an outer casing, or wall mounted. Goccia 3.9 is the 2.8" x 2.8" square, RGB version. (Not suitable for use in immersion in swimming pools or fountains).



Fixture Dimensions



TECHNICAL DATA

Wattage / Input	3.5W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Polyurethane Resin Cable Length: 4.92' standard (16.4" available)
CCT	RGB
BUG Rating	B0-U3-G0
Delivered Lumens	50 lm: (R) 15 lm, (G) 34 lm, (B) 7 lm
Efficacy	14.3 lm/W: (R) 4.29 lm/W, (G) 9.71 lm/W, (B) 2 lm/W
Optics	Diffuse
Fixture Dimensions	2.76" x 2.76" x 1.42" h
Fixture Weight	0.57 lbs
LED Source	12 Mid-power, Full-color LEDs
Lumen Maintenance	L80, B10 >50,000 hrs (Ta 25°C)
Color Consistency	—
Operating Temp.	-20°C to +45°C
IP Rating	IP65, IP68 IP69 (Water Temp Not Exceed 35° C)
IK Rating	IK10
Walkover	Yes

ORDERING INFORMATION

Example: GA3900P0060DR or GA3900P0060DR-1. Accessories / Power Supplies ordered separately.

GA3900	0P00	6	0D	R	
Model No.		CCT	Optics	Finish	Cable Length
GA3900	0P00	6 - RGB	0D - Diffused	R - Resin	4.92' standard 1 - 16.40'

Job Name/Date:

Fixture Type Designation:


SUGGESTED POWER SUPPLIES

24VDC - *For use as in-grade uplights*



Part Number	Description	Input/Output	# of Fixtures
PPLT00288-P12	DMX / RDM (Field Addressable) / DALI (4 Channels)	120-277VAC to 24VDC, 100W, Class 2	1-20

For other power supply options consult factory.

ACCESSORIES - Installation



WCA10
Outer Casing
For in-grade use




WCA28
Outer Casing
For Plasterboard



WL0100
Suction Cup

PHOTOMETRIC DATA

Note: All photometry is 3000K

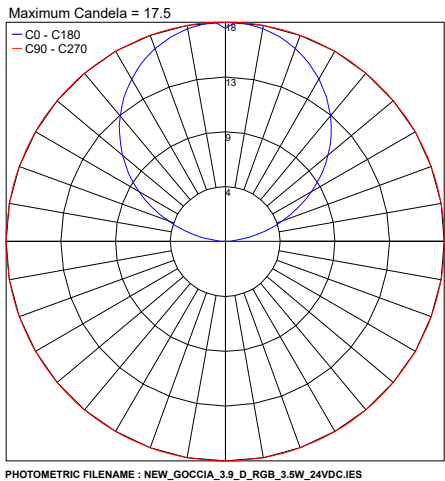

Job Name/Date:

Fixture Type Designation: