

GOCCIA 3.9


Goccia is a family of outdoor step lights that are ideal for accent and pathway guidance lighting. They are available in round or square versions, 3 sizes, static white or RGB, and that can be installed flush with the surface using an outer casing, or wall mounted. Goccia 3.9 is the 2.8" x 2.8" square, RGB version. (Not suitable for use in immersion in swimming pools or fountains).



TECHNICAL DATA

Wattage / Input	3.5W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Polyurethane Resin Cable Length: 4.92' standard (16.4" available)
CCT	RGB
BUG Rating	B0-U3-G0
Delivered Lumens	50 lm: (R) 15 lm, (G) 34 lm, (B) 7 lm
Efficacy	14.3 lm/W: (R) 4.29 lm/W, (G) 9.71 lm/W, (B) 2 lm/W
Optics	Diffuse
Fixture Dimensions	2.76" x 2.76" x 1.42" h
Fixture Weight	0.57 lbs
LED Source	12 Mid-power, Full-color LEDs
Lumen Maintenance	L80, B10 >50,000 hrs (Ta 25°C)
Color Consistency	—
Operating Temp.	-20°C to +45°C
IP Rating	IP65, IP68
IK Rating	IK10
Walkover	Yes

Fixture Dimensions



ORDERING INFORMATION

Example: GA3900P0060DR or GA3900P0060DR-1. Accessories / Power Supplies ordered separately.

GA3900	0P00	6	0D	R	
Model No.		CCT	Optics	Finish	Cable Length
GA3900	0P00	6 - RGB	0D - Diffused	R - Resin	4.92' standard 1 - 16.40'

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES - 24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00149	Non-Dim	120VAC to 24VDC, 10W, Class 2, IP65	1-2
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-2
PPLT00056	Non-Dim	120-277VAC to 24VDC, 26W, Class 2, IP66	1-5
PPLT00690	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 40W, Class 2, IP67	1-9
PPLT00627	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2, IP67	1-21
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	3-22

Suggested Lutron Compatible



Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-9
PPLT00530	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-21

For other power supply options consult factory.

ACCESSORIES - Installation



WCA10
Outer Casing
For in-grade use




WCA28
Outer Casing
For Plasterboard



WL0100
Suction Cup

PHOTOMETRIC DATA

Note: All photometry is 3000K

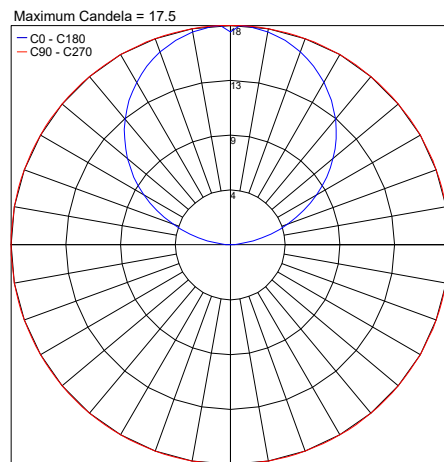

PHOTOMETRIC FILENAME : NEW_GOCCIA_3_9_D_RGB_3_5W_24VDC.IES

Job Name/Date:

Fixture Type Designation: