



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS. READ ALL INSTRUCTIONS. IMPORTANT SAFETY INSTRUCTIONS. SAVE THESE INSTRUCTIONS.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION! Please read all instructions before installation.

- Keep these instructions for future reference.
- Must be installed by a qualified electrician in accordance with national and local standards. Designplan is not responsible for fixtures installed without regard to these standards.
- Unauthorized alterations or tampering of product voids warranty.
- The main power connection must be in accordance with local electrical codes.
- Suitable for OUTDOOR & FOUNTAIN applications.



Electrical Connections:

- LED lights must be **connected in parallel** respecting polarities.
- **CHOOSE POWER SUPPLY ACCORDINGLY.** Please consider the voltage through which fixtures are fed as well as the max power consumption.
- **Connect power only if all the fixtures are connected.**
- This unit must be used in conjunction with a suitable fountain rated power supply.
- Use only Class 2 type electronic power supply.
- Never use switches on secondary circuit.


ATTENTION: For In-Grade - It is the contractor's responsibility to seal the conduit with "Great Stuff" aerosol seal that prevents water and moisture penetration for ultimate protection. Contractor **MUST** use gel-filled wire nuts.

Maintenance

Scheduled maintenance must be carried out once a year on all lighting devices, regardless of appliance class and type of use. It must include the following operations:

- Periodically clean fixtures to remove dirt from gratings and screw heads.
- Check tightness of screws on various parts of the device.
- Check that all cable glands and cables are intact and tight. Check that the glass or plastic lens is intact, and replace it if broken or damaged.
- The internal components such as the ballast, driver, washers and screws must not show clear signs of oxidation or rust. Clear traces of rust and oxidation will indicate the presence of water inside the device.
- In the case of damage, the components must be replaced by original components or spare parts.


REQUIRED ACCESSORIES

Accessories			
	Code	Finishing	Description
	PAR-NC	ABS	ABS Outer case


CABLE ACCESSORY DETAIL

15 FEET OF CABLE PROVIDED.
IF LONGER CABLE REQUIRED, CUSTOM LENGTHS AVAILABLE.

*Reel of cable**

MONO color


1 = + red
2 = - black




Code


CA-68-2-1
0.08x0.02in²

**On request it is possible to customize the length of the cable.*

*Reel of cable**

Tunable white


1 = + red
2 = WW blue
3 = CW green




Code


CA-68-4-1
0.16x0.02in²

**On request it is possible to customize the length of the cable.*

*Reel of cable**

RGBW | RGBW


1 = + black
2 = red
3 = green
4 = blue
5 = white



Code

CA-68-5-1
0.20x0.02in²

**On request it is possible to customize the length of the cable.*

PAR56

20W, REMOTE 12VDC or 24VDC

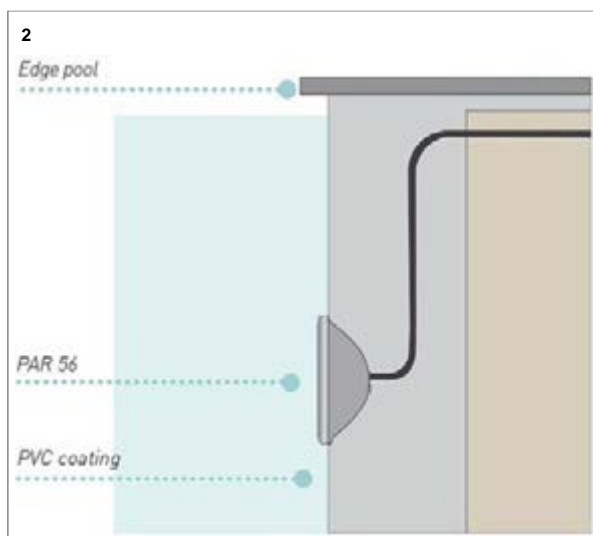
FIXTURE DIMENSION



FIXTURE INSTALLATION



Connect the wire crimper's with the supplied M4 Phillips head screws. The red wire crimper attaches to the red, positive terminal. The blue wire crimper attaches to the black, negative terminal.



Install in concrete pools with PVC or tile coating.

