



datasheet





DOWNLIGHT



FLOODLIGHT



FLOODLIGHT ON POLE



Fixture Dimensions - see page 2

Fixture Type Designation:

SPY is a versatile outdoor floodlight, also available as a downlight, that comes in three sizes (Mini, Medium and Maxi) and is 350° rotatable, for fulfilling every lighting situation. It has optics set back from the edge of the main body to allow precision without glare. Also available in a 'treehugger' version which can be secured to branches, poles or other supports. Spy is the medium sized version with a 2.6" diameter, and 8W of power. Dark Sky compliant for output below 80°.

TECHNICAL DATA

Wattage	8W			
Power Supply	Integral 120VAC			
Construction	Body: 6026 Anticorodal Aluminum Bracket: Stainless Steel Lens: Extra Clear Tempered Glass			
ССТ	2700K, 3000K, 4000K			
BUG Rating	B1-U0-G0 (3000K)			
CRI	>80			
Delivered Lumens	609 lm (3000K) Dark Sky compliant, output below 80°			
Efficacy	76.1 lm/W			
Optics	25°, 35°			
Finishes	Pure White (RAL 9010) Alu Gray (RAL 9006) Dark Brown			
Lumen Maintenance	40,000 hrs (Ta 35°C)			
Fixture Dimensions	Ø2.60" x 3.96" (downlight) Ø2.60" x 3.92" h x 2.56" base (floodlight) Ø2.60" x 10.65" h x 2.56" base (on pole) Ø2.60" x 5.53" h - 1.81" x 2.36" base (treehugger)			
IP Rating	IP66			
Impact Resistance	IK08			

ORDERING INFORMATION

Example: F23123.4.3.36.US. Power Supplies ordered separately.

				. US
Model No.	Finish	ССТ	Optics	
F23123 - Downlight	2 - Pure White (RAL 9010)	2 - 2700K	36 - 25° Medium	.US
F43126 - Flood	4 - Alu Gray (RAL 9006)	3 - 3000K	50 - 35° Wide	
F43124 - Flood Pole	8 - Dark Brown	4 - 4000K		
F43125 - Treehugger				

Job Name/Date:

© Copyright 2024 Designplan Lighting, Inc. Published: October 30, 2024

1 of 2

P: 908-996-7710


F: 908-996-7042







datasheet

FIXTURE DIMENSIONS

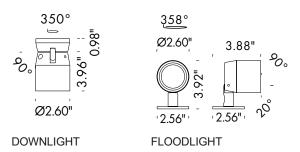







FLOODLIGHT ON POLE


ACCESSORIES

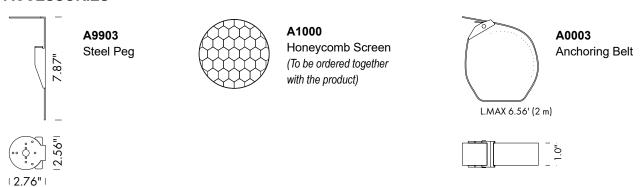

PHOTOMETRIC DATA

Note all Photometry is 3000K

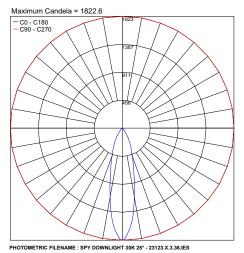



Job Name/Date:

Fixture Type Designation:

n NJ 08825 P: 908-996-7710 https://doi.org/10.1016/10.