



Technical features



Available on request

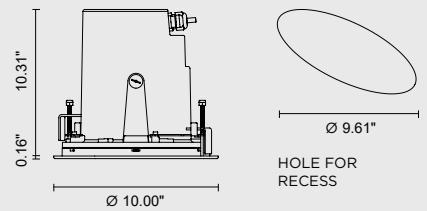

701311P

CIELO MAXI COB

Diameter 10.0" ceiling-recessed luminaire for outdoor installation, phosphochromatized and polyester powder coated die-cast copper-free aluminum body and stainless steel AISI 316L frame, tempered safety glass, molded silicone gasket. Light source tilt system +/- 15deg from outside. Built-in LED driver xx V 50-60Hz, with 1 CREE CXB2540 LED. IP67 rating.

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
cob led	14°	2,960	92.50
cob led	35°	2,940	91.88
cob led	55°	2,920	91.25
3000°K warm-white			
cob led	14°	2,970	92.81
cob led	35°	2,950	92.19
cob led	55°	2,930	91.56
4000°K neutral-white			
cob led	14°	2,990	93.44
cob led	35°	2,970	92.81
cob led	55°	2,950	92.19

Finish color options:

Stainless Steel

ACCESSORIES




AC119
HONEYCOMB LOUVER
FOR CIELO MAXI

Technical data

Wattage	32 WATT
IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance die-cast copper-free aluminum
Trim	Stainless steel AISI 316L
Coating	polyester powder coating with phosphochromating pre-finish
Light Source	Nr. 1 CREE CXB2540 COB LED
Screws	Stainless steel
Transformer	Electrical power supply 120VAC 50/60Hz built in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	M20
Power cable	3.28' neoprene power cable included
Gross weight	12.57 lbs



Technical features



Available on request




701312P

CIELO MAXI HP

Diameter 10.0" ceiling-recessed luminaire for outdoor installation, phosphochromatized and polyester powder coated die-cast copper-free aluminum body and stainless steel AISI 316L frame, tempered safety glass, molded silicone gasket. Light source tilt system +/- 15deg from outside. Built-in LED driver, with 4 x CREE "XHP50.2" LED. IP67 rating.

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	4°	3,296	96.94
high-power led	10°	3,268	96.12
high-power led	28°	3,239	95.26
3000°K warm-white			
high-power led	4°	3,325	97.79
high-power led	10°	3,296	96.94
high-power led	28°	3,268	96.12
4000°K neutral-white			
high-power led	4°	3,353	98.62
high-power led	10°	3,325	97.79
high-power led	28°	3,296	96.94


Finish color options:



ACCESSORIES



AC119
HONEYCOMB LOUVER
FOR CIELO MAXI

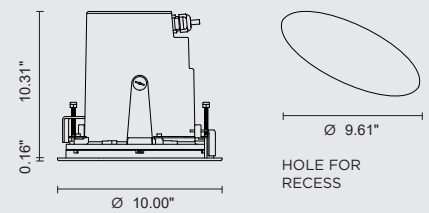

Technical data

Wattage	34 WATT
IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance die-cast copper-free aluminum
Trim	Stainless steel AISI 316L
Coating	polyester powder coating with phosphochromating pre-finish
Light Source	Nr. 4 CREE XHP50.2 LED
Screws	Stainless steel
Transformer	Electrical power supply 120VAC 50/60Hz built in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	M20
Power cable	3.28' neoprene power cable included
Gross weight	12.57 lbs








701313P

CIELO MAXI HP DMX RGBW

Diameter 10.00" ceiling-recessed luminaire for outdoor installation, phosphochromatised and polyester powder coated die-cast copper-free aluminium body and stainless steel AISI 316L frame, tempered safety glass, moulded silicone gasket. Light source tilt system +/- 15deg from outside. Built-in LED driver, DMX interface integrated; with 6 x CREE "XML" RGBW LED. IP67 rating.

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
RGBW			
high-power led	 12°	1,000	35.71
high-power led	 25°	992	35.43
high-power led	 35°	981	35.04

Finish color options:

Stainless Steel

ACCESSORIES




AC119
HONEYCOMB LOUVER
FOR CIELO MAXI

Technical Features



Available on request

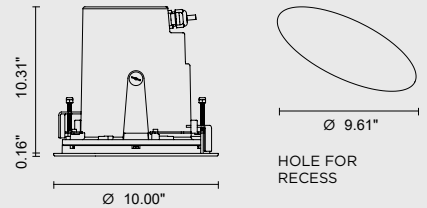

Technical data

Wattage	28 WATT
IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance die-cast copper-free aluminum
Trim	Stainless steel AISI 316L
Coating	polyester powder coating with phosphochromating pre-finish
Light Source	Nr. 6 CREE "XML" RGBW LED
Screws	Stainless steel
Remote driver	Constant voltage 24VDC remote driver needed
DMX	DMX interface integrated
Gasket	Silicone rubber
Glass	Tempered
Cable gland	M20 + PG9
Power cable	3.28' neoprene power cable included
DMX cable	DMX IN cable included
Gross weight	12.57 lbs








701314P

CIELO MAXI WALL-WASHER

Diameter 10.0" ceiling-recessed luminaire for outdoor installation, phosphochromatised and polyester powder coated die-cast copper-free aluminium body and stainless steel AISI 316L frame, tempered safety glass, moulded silicone gasket. Built-in LED driver 24VDC 50-60Hz, with 66 x mid-power SAMSUNG 2835 LED. IP67 rating.

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
mid-power led	 WALL-WASHER	1,800	75.00
3000°K warm-white			
mid-power led	 WALL-WASHER	1,880	78.33
4000°K neutral-white			
mid-power led	 WALL-WASHER	1,960	81.67


Finish color options:

 Stainless Steel

Technical features



Available on request

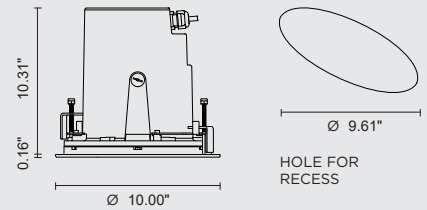

Technical data

Wattage	24 WATT
IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance die-cast copper-free aluminum
Trim	Stainless steel AISI 316L
Coating	polyester powder coating with phosphochromating pre-finish
Light Source	Nr. 66 x mid-power SAMSUNG 2835 LED
Screws	Stainless steel
Transformer	Electrical power supply 24VDC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	M20
Power cable	3.28' neoprene power cable included
Gross weight	12.57 lbs

