

CIELO MEDIUM HP


Cielo Medium is a round, IP67-rated, recessed downlight available in 4 versions and suitable for outdoor installation. Cielo Medium HP is a 20W version with 3 CREE XHP35 LED. Available in 3 color temperatures, 3 optic options and a stainless steel finish.



TECHNICAL DATA

Wattage	20W
Power Supply	Integral 120VAC
Construction	Body: Die-cast Copper-free Aluminum Trim: Stainless steel AISI 316L Lens: Tempered, Safety Glass Cable Length: 3.28'
CCT	2700K, 3000K, 4000K
Delivered Lumens	1733 lm (28°, 3000K) 1787 lm (10°, 3000K) 1863 lm (4°, 3000K)
Efficacy	86.7 lm/W (28°, 3000K) 89.4 lm/W (10°, 3000K) 93.2 lm/W (4°, 3000K)
Optics	4°, 10°, 28°
Finishes	Stainless Steel
Fixture Dimensions	Ø8.62" x 10.47" h
Cutout Dimensions	Ø8.27"
Fixture Weight	10.36 lbs
LED Source	3 CREE XHP35 LED
IP Rating	IP67
IK Rating	IK10

Fixture Dimensions

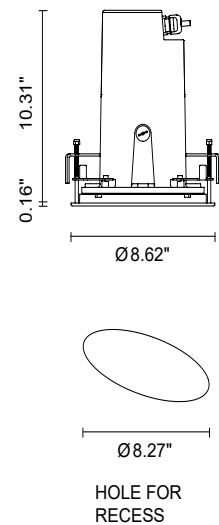

ORDERING INFORMATION

Example: 701308P.27.4.SS. Power Supplies ordered separately.

701308P			SS
Model No.	CCT	Optic	Finish
701308P	27 - 2700K 30 - 3000K 40 - 4000K	4 - 4° 10 - 10° 28 - 28°	SS - Stainless Steel

Job Name/Date:

Fixture Type Designation:

ACCESSORIES




AC118
Honeycomb Louver for Cielo Medium

PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 29714.9

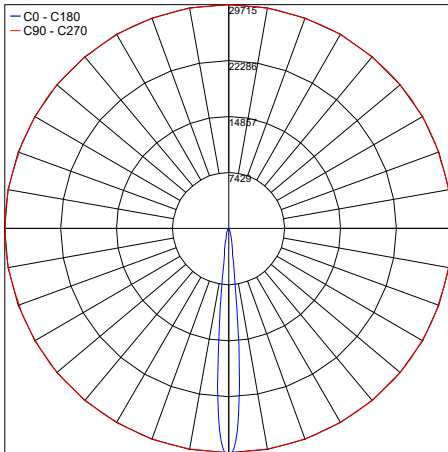


PHOTOMETRIC FILENAME : CIELO MEDIUM HP_701308_4°.IES

Maximum Candela = 15675.7

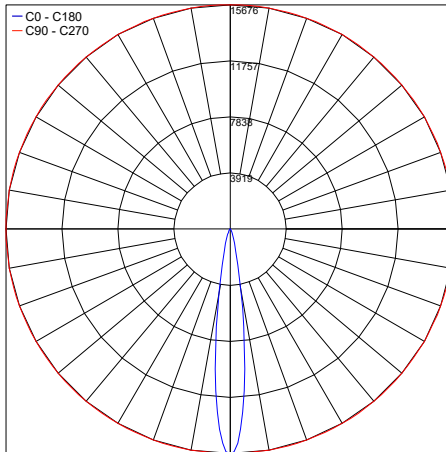

PHOTOMETRIC FILENAME : CIELO MEDIUM HP_701308_10°.IES

Maximum Candela = 7800.6

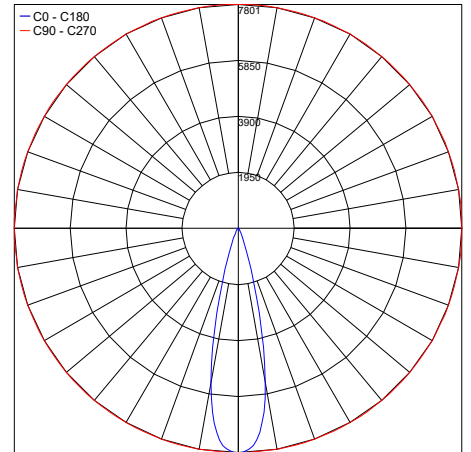

PHOTOMETRIC FILENAME : CIELO MEDIUM HP_701308_28°.IES

Job Name/Date:

Fixture Type Designation: