



Technical features



Available on request

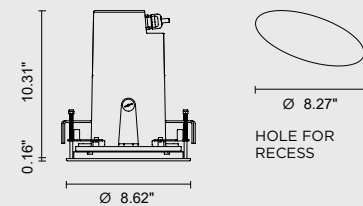

701307P

CIELO MEDIUM COB

Diameter 8.62" ceiling-recessed luminaire for outdoor installation, phosphochromatized and polyester powder coated die-cast copper-free aluminum body and stainless steel AISI 316L frame, tempered safety glass, molded silicone gasket. Light source tilt system +/- 15deg from outside. Built-in LED driver 50-60Hz, with 1 CREE CXB1512 LED. IP67 rating.

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
cob led	14°	1,050	80.77
cob led	35°	1,000	76.93
cob led	55°	980	75.38
3000°K warm-white			
cob led	14°	1,099	84.54
cob led	35°	1,079	83.00
cob led	55°	1,057	81.31
4000°K neutral-white			
cob led	14°	1,133	87.15
cob led	35°	1,113	85.62
cob led	55°	1,090	83.85

Finish color options:

Stainless Steel

ACCESSORIES




AC118
HONEYCOMB LOUVER
FOR CIELO MEDIUM

Technical data


Wattage	13 WATT
IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance die-cast copper-free aluminum
Trim	Stainless steel AISI 316L
Coating	polyester powder coating with phosphochromating pre-finish
Light Source	Nr. 1 CREE CXB1512 LED
Screws	Stainless steel
Transformer	Electrical power supply 120VAC 50/60Hz built in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	M20
Power cable	3.28' neoprene power cable included
Gross weight	10.36 lbs



Technical features



Available on request

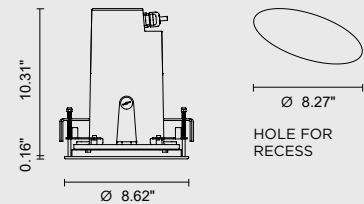

701308P

CIELO MEDIUM HP

Diameter 8.62" ceiling-recessed luminaire for outdoor installation, phospho-chromatized and polyester powder coated die-cast copper-free aluminum body and stainless steel AISI 316L frame, tempered safety glass, molded silicone gasket. Light source tilt system +/- 15deg from outside. Built-in LED driver, with 3 x CREE "XHP35" LED. IP67 rating.

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	4°	1,809	90.45
high-power led	10°	1,733	86.65
high-power led	28°	1,679	83.95
3000°K warm-white			
high-power led	4°	1,863	93.15
high-power led	10°	1,787	89.35
high-power led	28°	1,733	86.65
4000°K neutral-white			
high-power led	4°	1,898	94.90
high-power led	10°	1,825	91.25
high-power led	28°	1,771	88.55

Finish color options:

Stainless Steel

ACCESSORIES



AC118
HONEYCOMB LOUVER
FOR CIELO MEDIUM

Technical data


Wattage	20 WATT
IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance die-cast copper-free aluminum
Trim	Stainless steel AISI 316L
Coating	polyester powder coating with phosphochromating pre-finish
Light Source	Nr. 3 CREE XHP35 LED
Screws	Stainless steel
Transformer	Electrical power supply 120VAC 50/60Hz built in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	M20
Power cable	3.28' neoprene power cable included
Gross weight	10.36 lbs



Technical features



Available on request

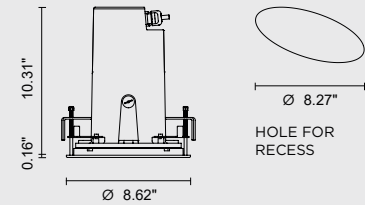

Technical data

Wattage	14 WATT
IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance die-cast copper-free aluminum
Trim	Stainless steel AISI 316L
Coating	polyester powder coating with phosphochromating pre-finish
Light Source	Nr. 1 CREE "XML" RGBW LED
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50/60Hz built-in
DMX	DMX interface integrated
Gasket	Silicone rubber
Glass	Tempered
Cable gland	M20 + PG9
Power cable	3.28' neoprene power cable included
DMX cable	DMX IN cable included
Gross weight	10.36 lbs

701309P

CIELO MEDIUM HP DMX RGBW

Diameter 8.62" ceiling-recessed luminaire for outdoor installation, phospho-chromatized and polyester powder coated die-cast copper-free aluminum body and stainless steel AISI 316L frame, tempered safety glass, molded silicone gasket. Light source tilt system +/- 15deg from outside. Built-in LED driver, DMX interface integrated; with 3 x CREE "XML" RGBW LED. IP67 rating.

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
RGBW			
high-power led	12°	480	34.28
high-power led	25°	456	32.58
high-power led	35°	435	31.07

Finish color options:




ACCESSORIES




AC18 HONEYCOMB LOUVER FOR CIELO MEDIUM



Technical features



Available on request

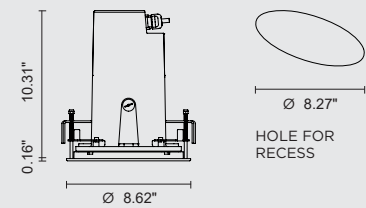




701310P

CIELO MEDIUM WALL-WASHER

Diameter 8.62" ceiling-recessed luminaire for outdoor installation, phosphochromatized and polyester powder coated die-cast copper-free aluminum body and stainless steel AISI 316L frame, tempered safety glass, molded silicone gasket. Built-in LED driver 50-60Hz, with 32 x mid-power SAMSUNG 2835 LED. IP67 rating.

Technical data

Wattage	13 WATT
IP Rating	IP67
IK Rating	IK10
Material	high corrosion resistance die-cast copper-free aluminum
Trim	Stainless steel AISI 316L
Coating	polyester powder coating with phosphochromating pre-finish
Light Source	Nr. 32 x mid-power SAMSUNG 2835 LED
Screws	Stainless steel
Transformer	Electrical power supply 120VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	M20
Power cable	3.28' neoprene power cable included
Gross weight	10.36 lbs

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
mid-power led	 WALL-WASHER	900	69.23
3000°K warm-white			
mid-power led	 WALL-WASHER	940	72.31
4000°K neutral-white			
mid-power led	 WALL-WASHER	980	75.38

Finish color options:

 Stainless Steel

