

CIELO MINI COB


Cielo Mini is a round, IP67-rated, recessed downlight available in 6 versions and suitable for outdoor installation. Cielo Mini COB is an 8W version with a CREE CXB1304 COB LED. Available in 3 color temperatures, 3 optics options and a stainless steel finish.



TECHNICAL DATA

Wattage	8W
Power Supply	Integral 120VAC
Construction	Body: Die-cast Copper-free Aluminum Trim: Stainless steel AISI 316L Lens: Tempered, Safety Glass Cable Length: 3.28'
CCT	2700K, 3000K, 4000K
Delivered Lumens	580 lm (60°, 3000K) 600 lm (36°, 3000K) 620 lm (18°, 3000K)
Efficacy	72.5 lm/W (60°, 3000K) 75.0 lm/W (36°, 3000K) 77.5 lm/W (18°, 3000K)
Optics	18°, 36°, 60°
Finishes	Stainless Steel
Fixture Dimensions	Ø6.06" x 8.03" h
Cutout Dimensions	Ø5.71"
Fixture Weight	5.29 lbs
LED Source	1 CREE CXB1304 COB LED
IP Rating	IP67
IK Rating	IK10

Fixture Dimensions

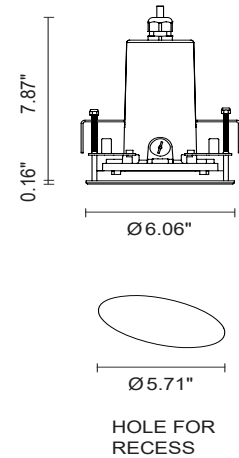

ORDERING INFORMATION

Example: 701301P.27.18.SS. Power Supplies ordered separately.

701301P			SS
Model No.	CCT	Optic	Finish
701301P	27 - 2700K	18 - 18°	SS - Stainless Steel
	30 - 3000K	36 - 36°	
	40 - 4000K	60 - 60°	

Job Name/Date:

Fixture Type Designation:

ACCESSORIES



AC116
Honeycomb Louver for Cielo Mini




AC117
Glare Shield for Cielo Mini

PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 9381.8

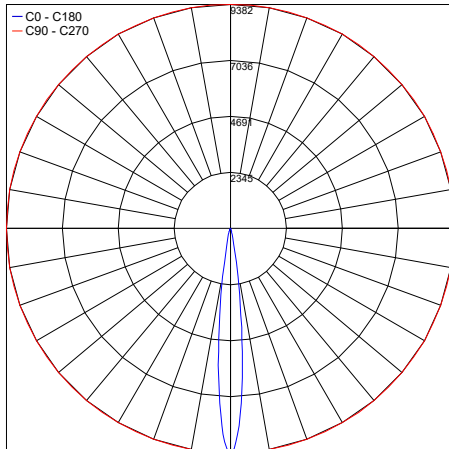


PHOTOMETRIC FILENAME : CIELO MINI COB_701301_14°.IES

Maximum Candela = 1312.8

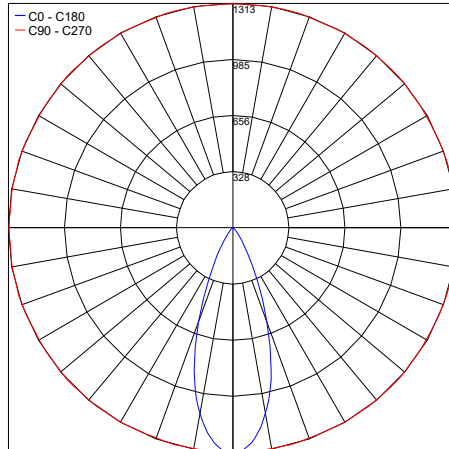

PHOTOMETRIC FILENAME : CIELO MINI COB_701301_35°.IES

Maximum Candela = 834.6

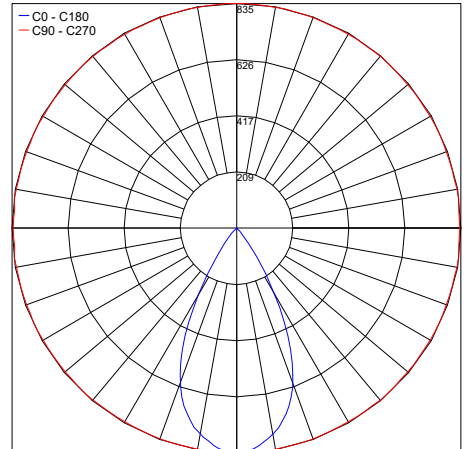

PHOTOMETRIC FILENAME : CIELO MINI COB_701301_55°.IES

Job Name/Date:

Fixture Type Designation: