

CIELO MINI DMX RGBW


Cielo Mini is a round, IP67-rated, recessed downlight available in 6 versions and suitable for outdoor installation. Cielo Mini HP RGBW is an 4.5W version with a DMX interface integrated. Available in RGBW, 3 optics options and a stainless steel finish.



TECHNICAL DATA

Wattage	4.5W
Power Supply	Remote 24VDC, not included. See page 2.
Construction	Body: Die-cast Copper-free Aluminum Trim: Stainless Steel AISI 316L Lens: Tempered, Safety Glass Cable Length: 3.28'
CCT	RGBW
Delivered Lumens	145 lm (35°) 152 lm (25°) 160 lm (12°)
Efficacy	32.2 lm/W (35°) 33.8 lm/W (25°) 35.6 lm/W (12°)
Optics	12°, 25°, 35°
Finishes	Stainless Steel
Fixture Dimensions	Ø6.06" x 8.03" h
Cutout Dimensions	Ø5.71"
Fixture Weight	5.29 lbs
LED Source	1 CREE "XML" RGBW LED
IP Rating	IP67
IK Rating	IK10

Fixture Dimensions

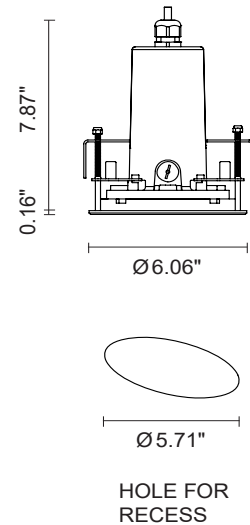

ORDERING INFORMATION

Example: 701303P.RGBW.12.SS. Power Supplies / Accessories ordered separately.

701303P	. RGBW	.	. SS
Model No.	CCT	Optic	Finish
701303P	RGBW	12 - 12° 25 - 25° 35 - 35°	SS - Stainless Steel

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-2
PPLT00680	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 20W, Class 2, IP66	1-3
PPLT00685	Non-Dim	120-277VAC to 24VDC, 25W, Class 2, IP67	1-4
PPLT00586	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-7
PPLT00690	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 40W, Class 2, IP67	1-7
PPLT00681	Non-Dim	120-277VAC to 24VDC, 90W, Class 2, IP67	1-16
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-17

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-7
PPLT00530	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-17

For other power supply options consult factory.

ACCESSORIES



AC116
Honeycomb Louver for Cielo Mini



AC117
Glare Shield for Cielo Mini

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: