

NANO LINEAR BLADE


Nano Linear Blade is a IP68-rated linear recessed downlight suitable for installation in ceilings in outdoor areas. It is available in 3 different LED configurations and wattages (3W, 4.5W, 6W), 3 color temperatures, and a stainless steel AISI 316L finish.



TECHNICAL DATA

Wattage / Input	3W (350mA), 4.5W (500mA), 6W (700mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Hard Anodized Aluminum Trim: Stainless Steel AISI 316L Lens: Tempered, Safety Glass Cable Length: 3.28'
CCT	2700K, 3000K, 4000K
Delivered Lumens	220 lm (3W, 3000K) 330 lm (4.5W, 3000K) 440 lm (6W, 3000K)
Efficacy	73.3 lm/W (3W, 4.5W, 6W - 3000K)
Optics	20°x100°
Finishes	Stainless Steel
Fixture Dimensions	4.02" x 1.38" x h. 1.48"
Fixture Weight	1.10 lbs
LED Source	3 x CREE XP-G2 LED
IP Rating	IP68
IK Rating	IK08

Fixture Dimensions

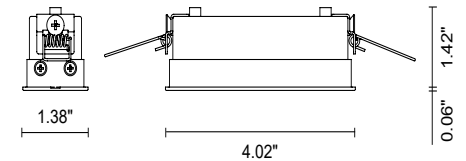

ORDERING INFORMATION

Example: 701403P.27.3.20.SS. Power Supplies ordered separately.

701403P	.		.		.	20	.	SS
Model No.	CCT	LED Power	Optic	Finish				
701403P	27 - 2700K 30 - 3000K 40 - 4000K	3 - 3W 45 - 4.5W 6 - 6W	20 - 20°x100°	SS - Stainless Steel				

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA - For 3W version

Part Number	Description	Input/Output	# of Fixtures
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-1
PPLT00480-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 30W, Class 2, DAMP	1-2
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-4
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W, Class 2	1-8

SUGGESTED POWER SUPPLIES

500mA - For 4.5W version

Part Number	Description	Input/Output	# of Fixtures
PPLT00497	Phase Dim (120V only)	120VAC to 500mA, 12W, Class 2, DAMP	1-1
PPLT00480-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 30W, Class 2, DAMP	1-2
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-4
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 500mA, 100W, Class 2	1-8

SUGGESTED POWER SUPPLIES

700mA - For 6W version


Part Number	Description	Input/Output	# of Fixtures
PPLT00498	Phase Dim (120V only)	120VAC to 700mA, 12W, Class 2, DAMP	1-1
PPLT00480-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 30W, Class 2, DAMP	1-2
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 50W, Class 2, DAMP	1-4
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 700mA, 100W, Class 2	1-8

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 719.9

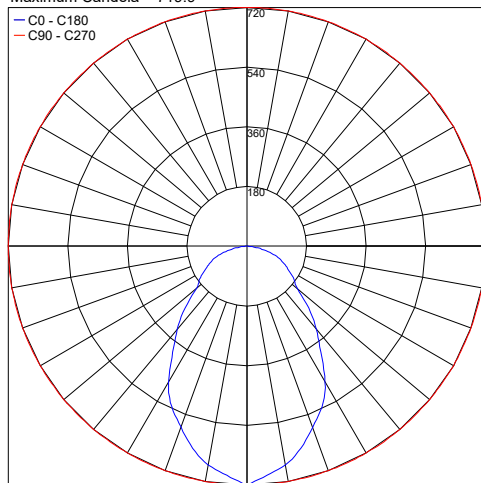

PHOTOMETRIC FILENAME : NANO LINEAR 6W BLADE 701403_REPAIRED.IES

Job Name/Date:

Fixture Type Designation: