

NANO LINEAR WALL-WASHER


Nano Linear Wall Washer is a IP68-rated linear recessed downlight suitable for installation in ceilings in outdoor areas. It is available in 3 color temperatures with wall washer optics and a stainless steel AISI 316L finish.



TECHNICAL DATA

Wattage	6W
Power Supply	Remote 500mA, not included. See page 2.
Construction	Body: Hard Anodized Aluminum Trim: Stainless steel AISI 316L Lens: Tempered, Safety Glass Cable Length: 3.28'
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U0-G0 (3000K)
Delivered Lumens	470 lm (3000K)
Efficacy	78.34 lm/W (3000K)
Optics	Wall Washer
Finishes	Stainless steel
Fixture Dimensions	4.02" x 1.38" x h. 1.48"
Fixture Weight	1.10 lbs
LED Source	16 x mid-power SAMSUNG 2835 LED
IP Rating	IP68
IK Rating	IK08

Fixture Dimensions

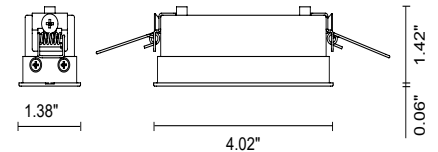

ORDERING INFORMATION

Example: 701402P.27.SS. Power Supplies ordered separately.

701402P	.		.	SS
Model No.		CCT		Finish
701402P		27 - 2700K		SS - Stainless Steel
		30 - 3000K		
		40 - 4000K		

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA - For 4.5W version


Part Number	Description	Input/Output	# of Fixtures
PPLT00497	Phase Dim (120V only)	120VAC to 500mA, 12W, Class 2, DAMP	1-1
PPLT00480-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 30W, Class 2, DAMP	1-2
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-4
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 500mA, 100W, Class 2	1-8

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 324.7

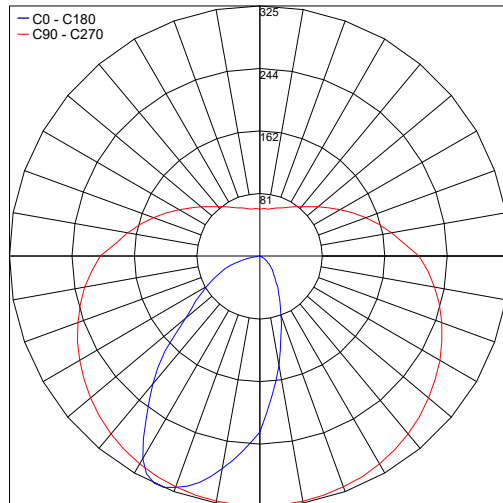

PHOTOMETRIC FILENAME : NANO LINEAR WALL WASHER 701402_REPAIRED.IES

Job Name/Date:

Fixture Type Designation: