

Nuss IP65 is a IP65-rated, wall mounted, bi-emission luminaire made of DurCoral® with a clean, linear design, that is suitable for outdoor installation on walls. It is available in white light with a wide 120° optic.




## TECHNICAL DATA

<b>Wattage</b>	2 x 4W
<b>Power Supply</b>	Integral 120VAC
<b>Construction</b>	Body: DurCoral® Lens: Extra White Frosted Glass
<b>CCT</b>	3000K (4000K on request, consult factory)
<b>CRI</b>	90
<b>BUG Rating</b>	B1-U4-G0
<b>LED Lumens</b>	1598 lm (3000K)
<b>Efficacy</b>	400 lm/W (3000K)
<b>Optics</b>	120° Wide Beam
<b>Finishes</b>	Unfinished
<b>Fixture Dimensions</b>	5.1" h x 5.1" w x 5.9" l
<b>Fixture Weight</b>	6.8 lbs
<b>IP Rating</b>	IP65


The body is made of DurCoral®, a high-performance "hi-tech" material born from the union of Coral® and cement. It is an aggregate twice as hard as concrete, which allows very high performances in terms of quality, flow and resistance and that, above all, differs from other outdoor materials, for the possibility of being treated with any type of paint and finish. Distinguished by the ability to resist abrasion, insensitive to ultraviolet rays, pollution and atmospheric agents is certainly the ideal material to be placed outdoors.

Fixture Dimensions

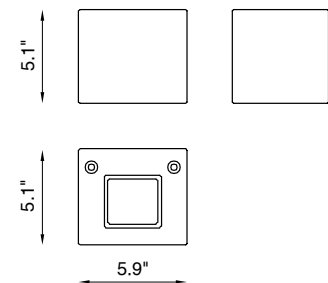

## PHOTOMETRIC DATA

Note: All Photometry is 3000K

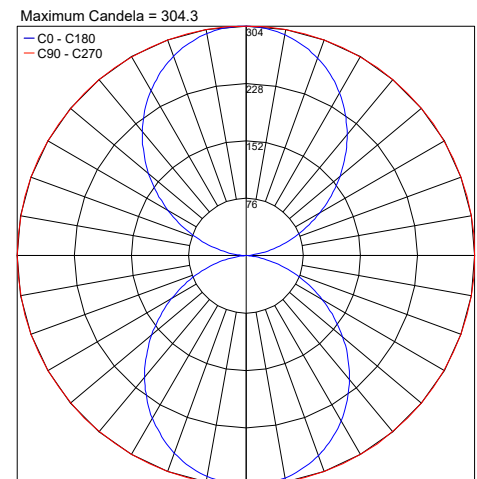

## ORDERING INFORMATION

Example: BU3061.DC.US. Accessories / Power Supplies ordered separately.

<b>BU3061</b>		<b>DC</b>	<b>US</b>
<b>Model No.</b>	<b>CCT</b>	<b>Finish</b>	
<b>BU3061</b>	30 - 3000K (standard) 27 - 2700K (on request) 40 - 4000K (on request)	<b>DC - DurCoral®</b>	<b>US</b>

Job Name/Date:

Fixture Type Designation: