

ALTOPIANO C 3.0


Altopiano C are outdoor ceiling-mounted luminaires that can be coordinated with Altopiano downlights, and Altopiano S suspended fixtures. They come in a cylindrical or square version in 2 sizes with a minimalist look perfect for hospitality and residential settings. It has recessed optics for excellent visual comfort and a UGR of less than 19 with a variety of optics. Altopiano C 3.0 is the Ø5.9" x 10.0" cylindrical version.



TECHNICAL DATA

Wattage	15W, 20W
Power Supply	Integral 120VAC
Construction	Body: Anticorodal Aluminum Lens: Serigraphed-gray and Transparent Extra-clear Glass
CCT	2200K, 2700K, 3000K, 4000K
CRI	80, >90 (2200K only available >90)
BUG Rating (CRI 80)	B1-U1-G0 (Diffuse, 20°x72°-15W) B2-U0-G0 (61°-both, 37°-15W, 24°-20W, 18°-both) B2-U1-G0 (37°-20W, 20°x72°-20W)
Delivered Lumens	1212 lm (3000K, 18°, 15W, CRI >90) 1431 lm (3000K, 18°, 15W, CRI 80) 1683 lm (3000K, 18°, 20W, CRI >90) 1988 lm (3000K, 18°, 20W, CRI 80)
Efficacy	80.8 lm/W (3000K, 18°, 15W, CRI >90) 95.4 lm/W (3000K, 18°, 15W, CRI 80) 84.15 lm/W (3000K, 18°, 20W, CRI >90) 99.4 lm/W (3000K, 18°, 20W, CRI 80)
Optics	6 Standard (see below)
Finishes	4 Standard, Custom RAL on request
Fixture Dimensions	Ø 5.91" x 10.04" h
Fixture Weight	5.07 lbs
Lumen Maintenance	60,000 hrs L90, B10 (Ta 25°C)
Color Consistency	2-Step MacAdam
Operating Temp.	-4°F to +122°F
IP Rating	IP66
IK Rating	IK08

Fixture Dimensions

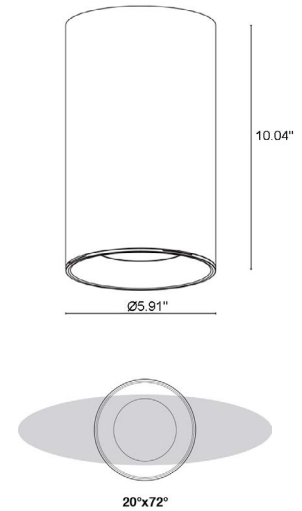

ORDERING INFORMATION

Example: AC3010100150KF. Accessories ordered separately.


Model #	CRI	Control System	Accessories	CCT	Optics	Finish
AC3010 - 15W	0 - CRI 80	0 - On / Off	00 - None	N - 2200K	0S - 18°	H - Anthracite
AC3011 - 20W	(not available on 2200K)	D - DALI-2	01 - Honeycomb	(CRI>90 only)	0M - 24°	T - Cor-ten
	1 - CRI >90		02 - Anti-Glare	F - 2700K	0L - 37°	F - Gray
			Honeycomb Louvre and Anti-glare Shield not available on OW and OD (Diffuse)	5 - 3000K	0K - 61°	E - White
				9 - 4000K	0W - 20°x72°	C - Custom RAL
					0D - Diffuse	(consult factory for "C")

Job Name/Date:


Fixture Type Designation:

ACCESSORIES

Anti-Glare



Honeycomb Louvre
Built into the fixture
Can be provided on all optics
except for diffuse and elliptical optics




Anti-glare Shield
Built into the fixture
Can be provided on all optics
except for diffuse and elliptical optics

PHOTOMETRIC DATA

Note: All photometry is 3000K

CRI 80 - 15W


24°

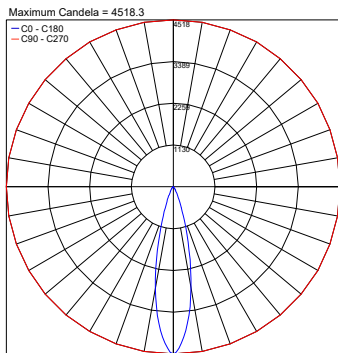

PHOTOMETRIC FILENAME : ALTOPIANO_C_3.0_M_24_3000K_CR80_15W.IES

Maximum Candela = 3028.0


37°

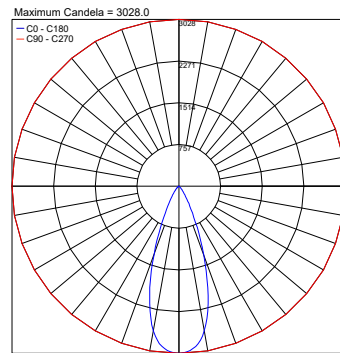

PHOTOMETRIC FILENAME : ALTOPIANO_C_3.0_L_37_3000K_CR80_15W.IES

Maximum Candela = 1471.5


61°

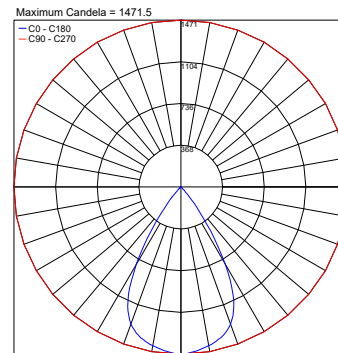

PHOTOMETRIC FILENAME : ALTOPIANO_C_3.0_K_61_3000K_CR80_15W.IES

Maximum Candela = 1037.2


Diffuse

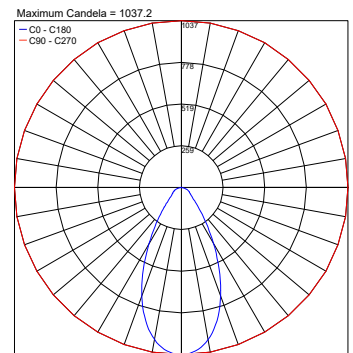

PHOTOMETRIC FILENAME : ALTOPIANO_C_3.0_D_3000K_CR80_15W.IES

CRI 80 - 20W


24°

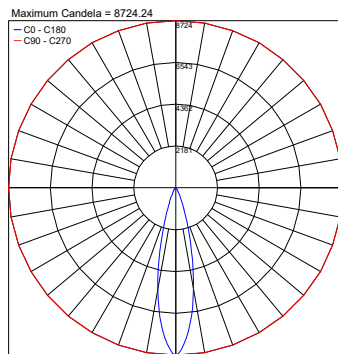

PHOTOMETRIC FILENAME : ALTOPIANO_C_3.0_M_24_3000K_CR80_20W.IES

Maximum Candela = 4207.8


37°

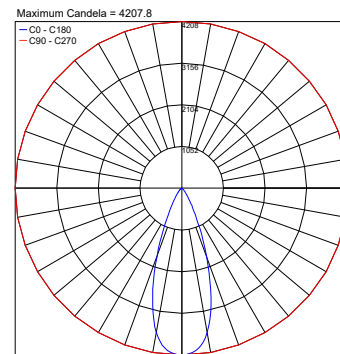

PHOTOMETRIC FILENAME : ALTOPIANO_C_3.0_L_37_3000K_CR80_20W.IES

Maximum Candela = 2045.2


61°

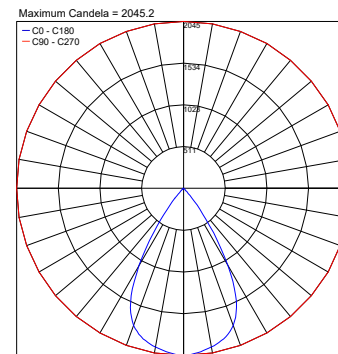

PHOTOMETRIC FILENAME : ALTOPIANO_C_3.0_K_61_3000K_CR80_20W.IES

Maximum Candela = 1441.7

Diffuse

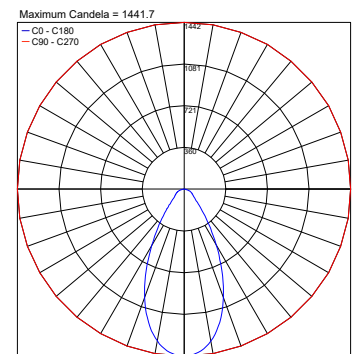


PHOTOMETRIC FILENAME : ALTOPIANO_C_3.0_D_3000K_CR80_20W.IES

Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA - Note: All photometry is 3000K

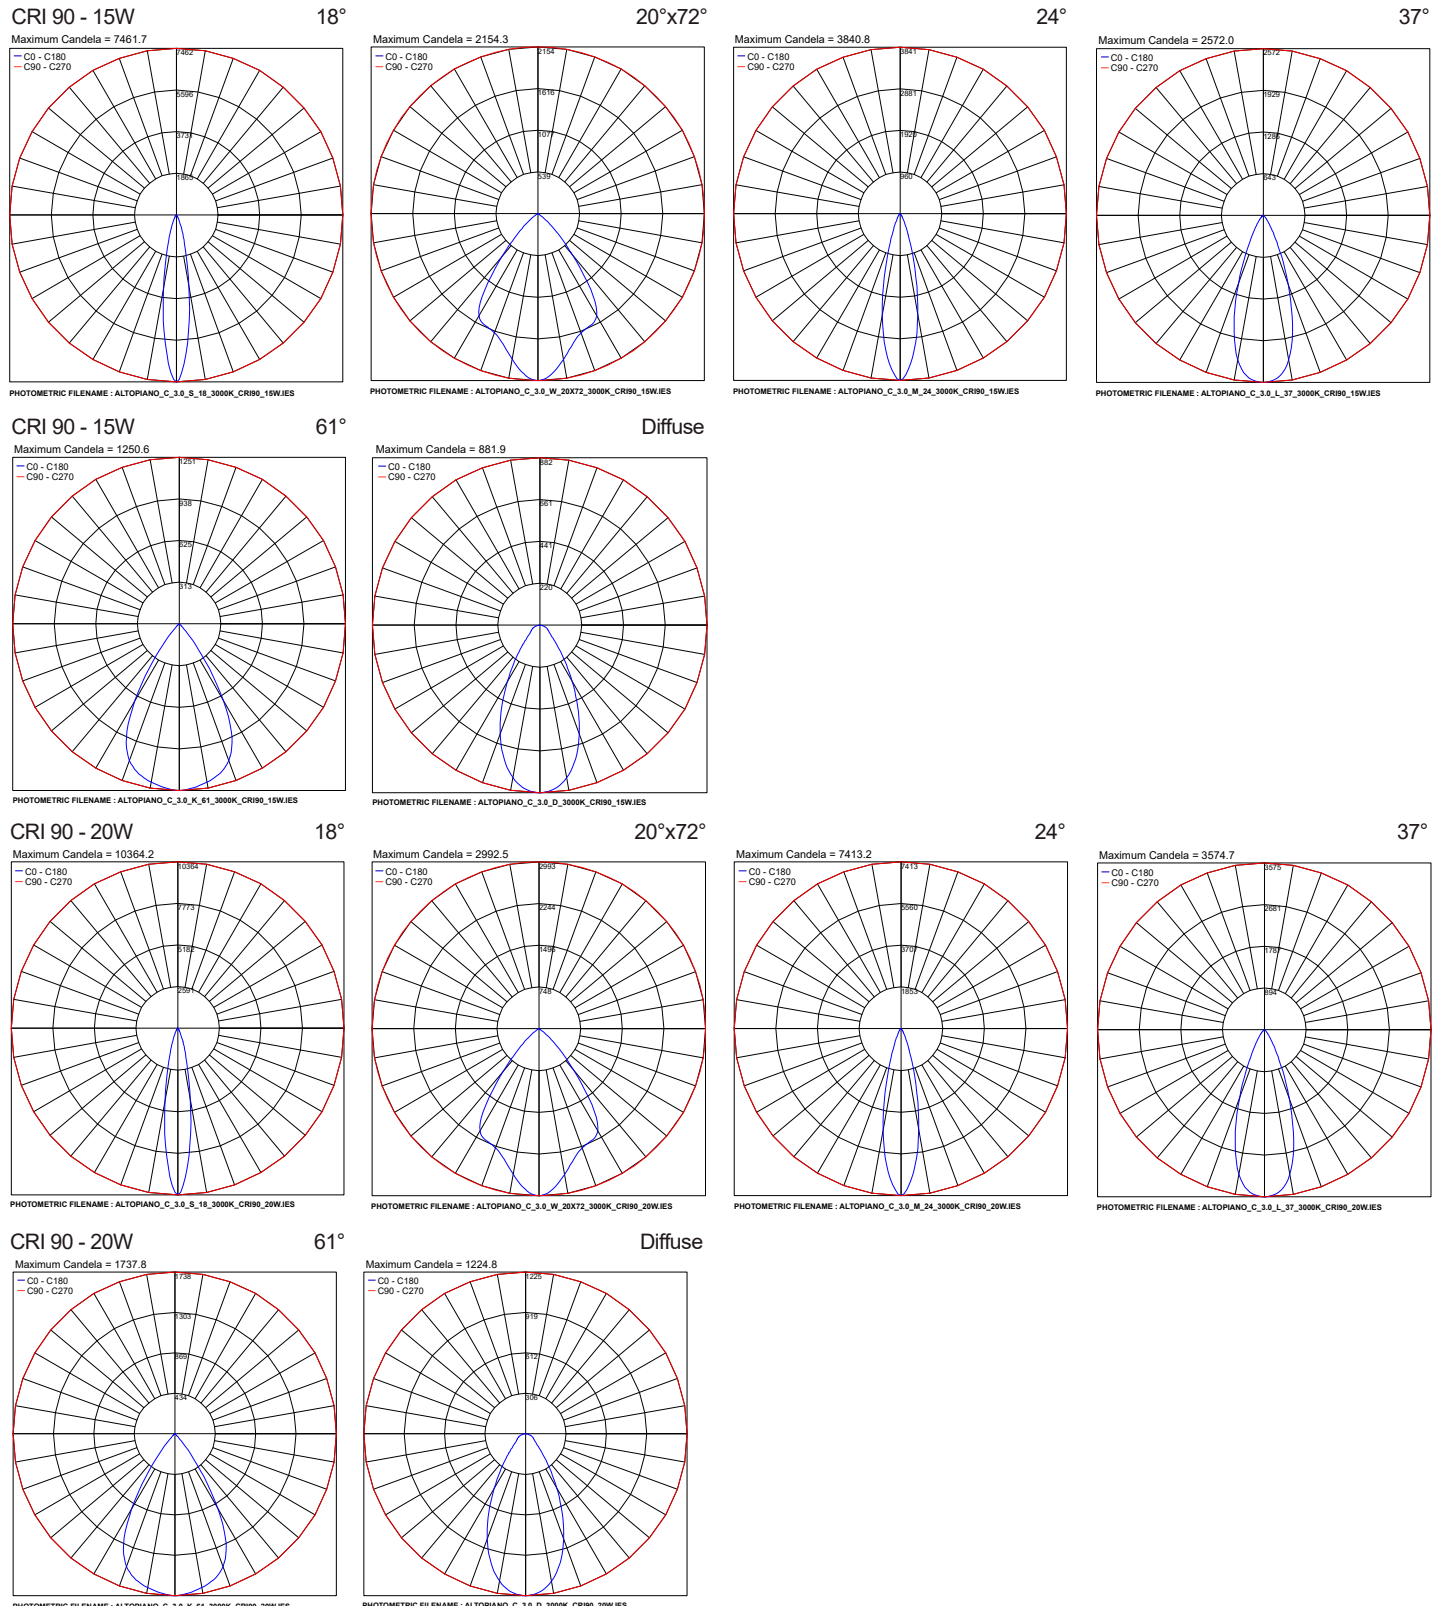

Job Name/Date:

Fixture Type Designation: