


Trevi are a series of linear profiles suitable for outdoor and underwater applications featuring a cylindrical screen, a distinctive characteristic that enables the profile to ‘disappear’ in the water, leaving just its light to capture the eye. Trevi 2.6 is 25.7” in length and comes in RGBW with elliptical or diffuse optics.



TECHNICAL DATA

|                    |                                                                                                                                             |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Wattage / Input    | 25W (24VDC)                                                                                                                                 |
| Power Supply       | Remote, not included. See page 2.                                                                                                           |
| Construction       | End Caps: AISI 316L Stainless Steel<br>Heat Sink: Internal Anticorodal Aluminum<br>Lens: Transparent Polycarbonate<br>Cable Length: 16.4 ft |
| CCT                | RGBW                                                                                                                                        |
| BUG Rating         | B0-U1-G0 (3000K, Diffuse)<br>B1-U1-G0 (RGBW/3000K, Diffuse, 39°x95°                                                                         |
| Delivered Lumens   | 1435 lm (Diffuse): (R) 162 lm, (G) 599 lm,<br>(B) 112 lm, (W) 670 lm                                                                        |
| Efficacy           | 57.4 lm/W (Diffuse): (R) 6.5 lm/W,<br>(G) 24.0 lm/W, (B) 4.5 lm/W, (W) 26.8 lm/W                                                            |
| Optics             | 39°x95°, Diffuse                                                                                                                            |
| Finish             | Polycarbonate                                                                                                                               |
| Fixture Dimensions | Ø1.97" x 25.71" l                                                                                                                           |
| Fixture Weight     | 5.84 lbs                                                                                                                                    |
| LED Source         | 168 mid-power LEDs                                                                                                                          |
| Lumen Maintenance  | 60,000h L80 B10 (Ta 25°C)                                                                                                                   |
| Color Consistency  | —                                                                                                                                           |
| Operating Temp.    | -4°F - 113°F (installation outdoors)<br>32°F - 113°F (installation underwater)                                                              |
| IP Rating          | IP65, IP68                                                                                                                                  |
| Impact Rating      | IK10                                                                                                                                        |
| Max Depth          | 32.81 ft                                                                                                                                    |

Fixture Dimensions

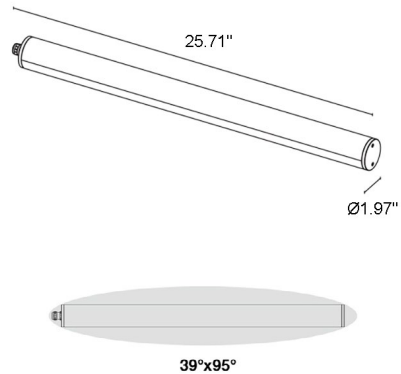

ORDERING INFORMATION

Example: TR2600000070WP. Accessories / Power Supplies ordered separately.

|            |           |                            |                   |
|------------|-----------|----------------------------|-------------------|
| TR26000000 | 70        |                            | P                 |
| Model No.  | CCT       | Optics                     | Finish            |
| TR26000000 | 70 - RGBW | W - 39°x95°<br>D - Diffuse | P - Polycarbonate |

Job Name/Date:


Fixture Type Designation:

SUGGESTED POWER SUPPLIES  
STATIC WHITE - 24VDC (FOR USE WITH FOUNTAIN / WATER FEATURES)


| Part Number   | Description                                       | Input/Output                                      | # of Fixtures |
|---------------|---------------------------------------------------|---------------------------------------------------|---------------|
| FPV-100EL0024 | DMX / RDM (Field Addressable) / DALI (4 channels) | 120-277VAC to 24VDC, 100W, Class 2, IP66, NEMA 4X | 1-3           |

For other power supply options consult factory.

ACCESSORIES - Installation (REQUIRED)

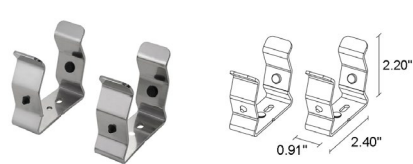

WMA04  
Clips Pair

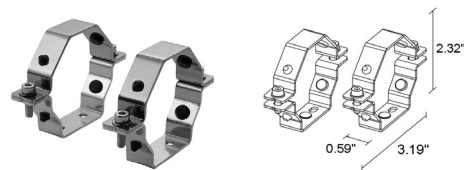

WMA05  
Pair of tamper-resistant clips



WMA07  
Suspension Kit


Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 267.1

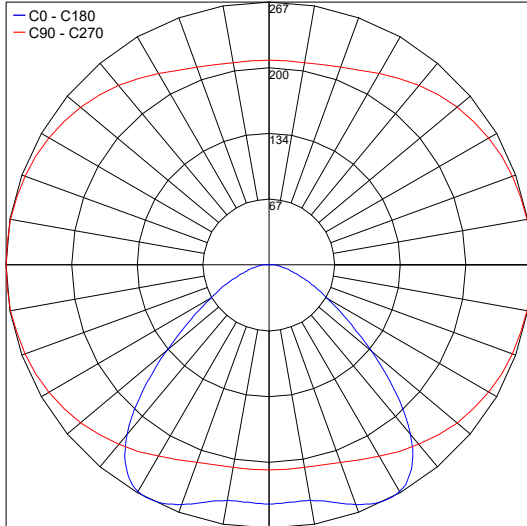


PHOTOMETRIC FILENAME : TREVI\_2.6\_D\_3000K\_25W\_24VDC.IES

Maximum Candela = 441.7

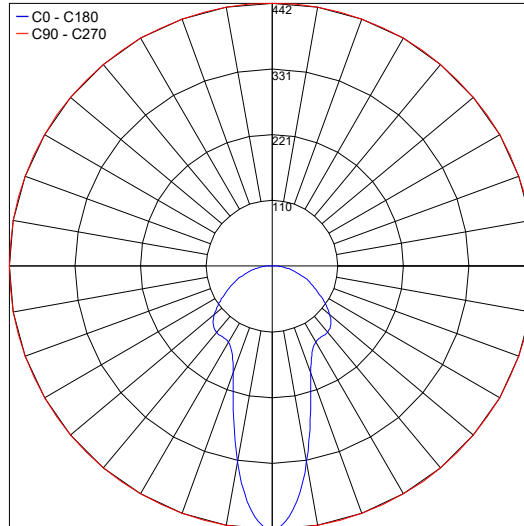


PHOTOMETRIC FILENAME : TREVI\_2.6\_W\_39X95\_3000K\_25W\_24VDC.IES

Maximum Candela = 539.7

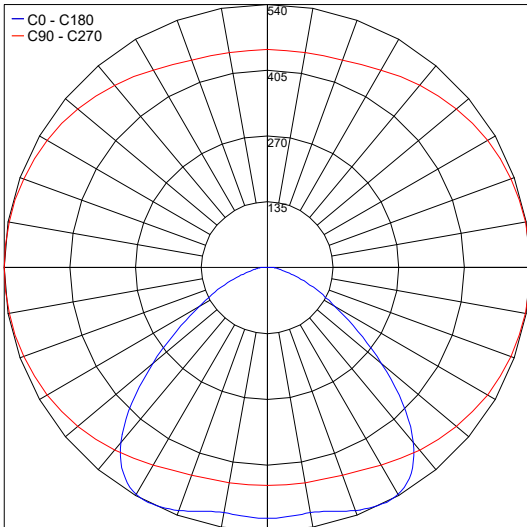

PHOTOMETRIC FILENAME : TREVI\_2.6\_D\_RGBW\_25W\_24VDC.IES

Maximum Candela = 975

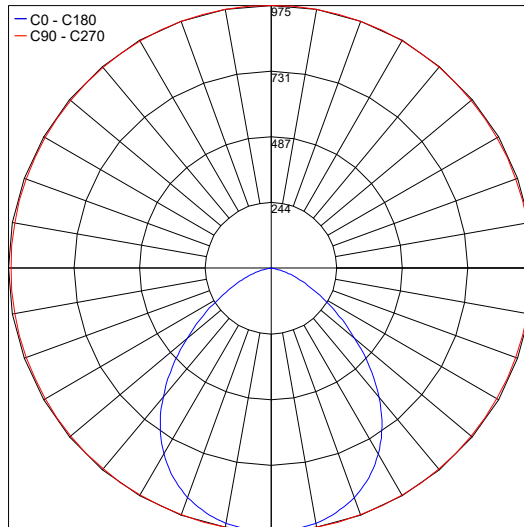

PHOTOMETRIC FILENAME : TREVI\_2.6\_W\_39X95\_RGBW\_25W\_24VDC.IES

Job Name/Date:

Fixture Type Designation: