


# TREVI 2.7

Trevi are a series of linear profiles suitable for outdoor and underwater applications featuring a cylindrical screen, a distinctive characteristic that enables the profile to ‘disappear’ in the water, leaving just its light to capture the eye. Trevi 2.7 is 47.8” in length and comes in RGBW with elliptical or diffuse optics.




UL 676

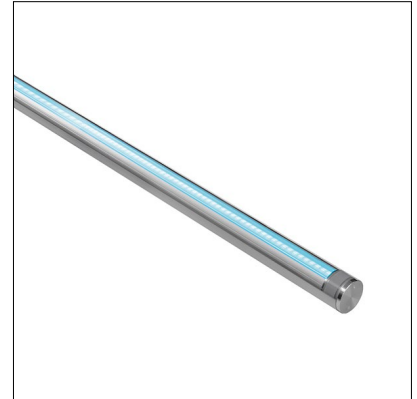

## TECHNICAL DATA

<b>Wattage / Input</b>	50W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	End Caps: AISI 316L Stainless Steel Heat Sink: Internal Anticorodal Aluminum Lens: Transparent Polycarbonate Cable Length: 16.4 ft
<b>CCT</b>	RGBW
<b>BUG Rating</b>	B1-U1-G0 (30K, 39°x95°, Diffuse & RGBW, Diffuse) B2-U1-G0 (RGBW, 39°x95°)
<b>Delivered Lumens</b>	2870 lm (Diffuse): (R) 324 lm, (G) 1197 lm, (B) 224 lm, (W) 1341 lm
<b>Efficacy</b>	117.4 lm/W (Diffuse): (R) 6.5 lm/W, (G) 23.9 lm/W, (B) 4.5 lm/W, (W) 26.8 lm/W
<b>Optics</b>	39°x95°, Diffuse
<b>Finish</b>	Polycarbonate
<b>Fixture Dimensions</b>	Ø1.97" x 47.76" l
<b>Fixture Weight</b>	8.82 lbs
<b>Lumen Maintenance</b>	60,000h L80 B10 (Ta 25°C)
<b>Color Consistency</b>	—
<b>Operating Temp.</b>	-4°F - 113°F (installation outdoors) 32°F - 113°F (installation underwater)
<b>IP Rating</b>	IP65, IP68
<b>Impact Rating</b>	IK10
<b>Max Depth</b>	32.81 ft

Fixture Dimensions

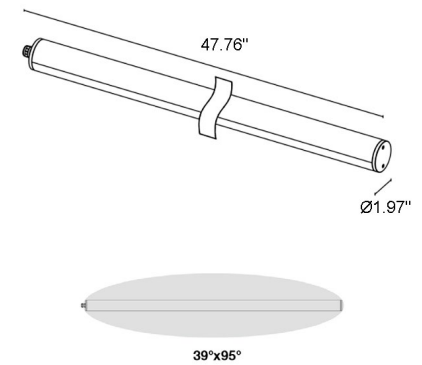

## ORDERING INFORMATION

Example: TR2700000070WP. Accessories / Power Supplies ordered separately.

TR27000000	70		P
<b>Model No.</b>	<b>CCT</b>	<b>Optics</b>	<b>Finish</b>
TR27000000	70 - RGBW	W - 39°x95° D - Diffuse	P - Polycarbonate

Job Name/Date:

Fixture Type Designation:


## SUGGESTED POWER SUPPLIES

STATIC WHITE - 24VDC (FOR USE WITH FOUNTAIN / WATER FEATURES)


Part Number	Description	Input/Output	# of Fixtures
<a href="#">FPV-100EL0024</a>	DMX / RDM (Field Addressable) / DALI (4 channels)	120-277VAC to 24VDC, 100W, Class 2, NEMA 4	1-1

For other power supply options consult factory.

## ACCESSORIES - Installation (REQUIRED)

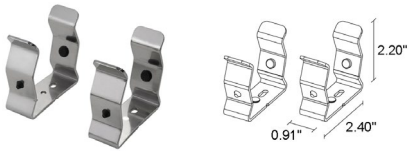

**WMA04**  
Clips Pair

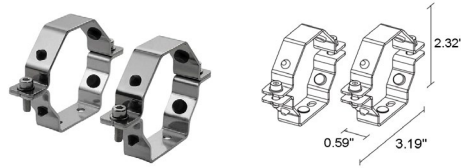

**WMA05**  
Pair of tamper-resistant clips



**WMA07**  
Suspension Kit


Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 534.1

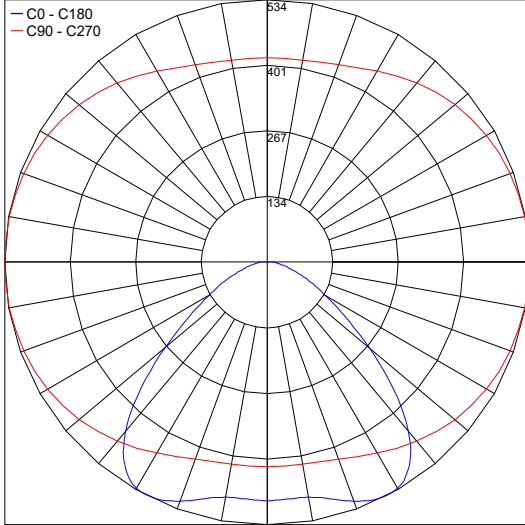


PHOTOMETRIC FILENAME : TREVI\_2.7\_D\_3000K\_50W\_24VDC.IES

Maximum Candela = 1079.5

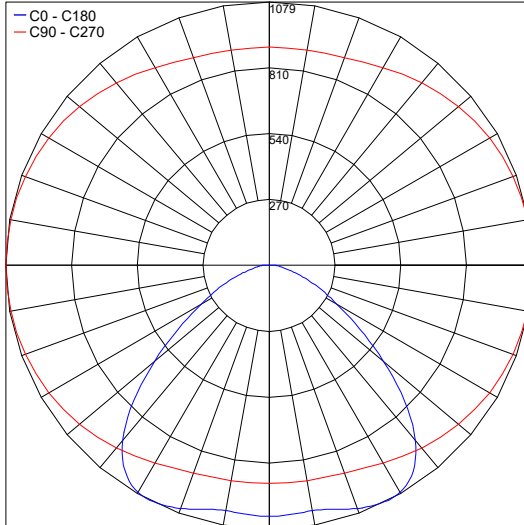


PHOTOMETRIC FILENAME : TREVI\_2.7\_D\_RGBW\_50W\_24VDC.IES

Maximum Candela = 883.3

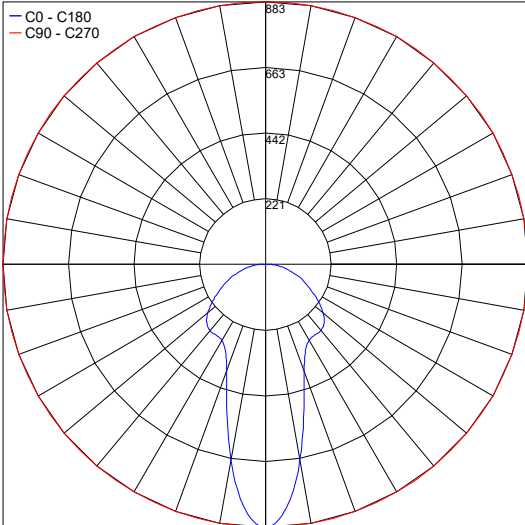

PHOTOMETRIC FILENAME : TREVI\_2.7\_W\_39X95\_3000K\_50W\_24VDC.IES

Maximum Candela = 1945

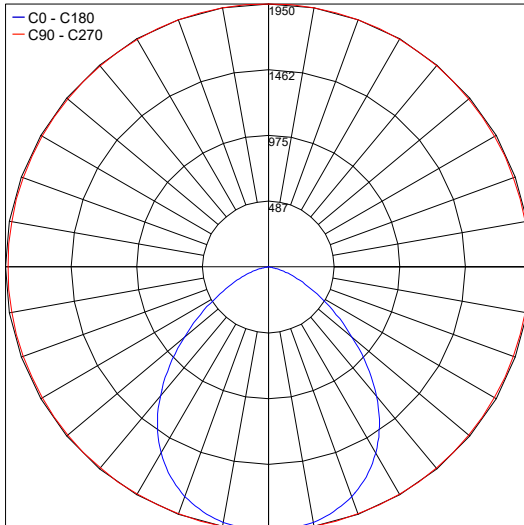

PHOTOMETRIC FILENAME : TREVI\_2.7\_W\_39X95\_RGBW\_50W\_24VDC.IES

Job Name/Date:

Fixture Type Designation: