


TREVI 2.8

Trevi are a series of linear profiles suitable for outdoor and underwater applications featuring a cylindrical screen, a distinctive characteristic that enables the profile to ‘disappear’ in the water, leaving just its light to capture the eye. Trevi 2.8 is 69.8” in length and comes in RGBW with elliptical or diffuse optics.




UL 676

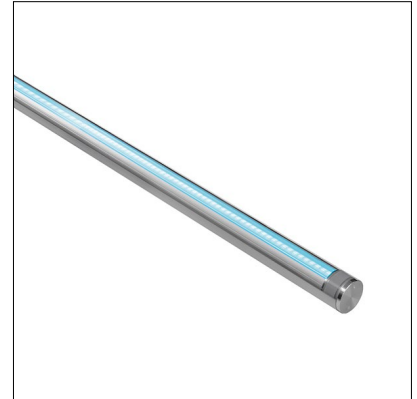

TECHNICAL DATA

Wattage / Input	75W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	End Caps: AISI 316L Stainless Steel Heat Sink: Internal Anticorodal Aluminum Lens: Transparent Polycarbonate Cable Length: 16.4 ft
CCT	RGBW
BUG Rating	B1-U1-G1 (3000K: Diffuse, 39°x95°) B2-U2-G1 (RGBW: Diffuse, 39°x95°)
Delivered Lumens	4305 lm (Diffuse): (R) 486 lm, (G) 1796 lm (B) 336 lm, (W) 2011 lm
Efficacy	57.4 lm/W (Diffuse): (R) 6.5 lm/W (G) 24.0 lm/W, (B) 4.5 lm/W, (W) 26.8 lm/W
Optics	39°x95°, Diffuse
Finish	Polycarbonate
Fixture Dimensions	Ø1.97" x 69.80" l
Fixture Weight	10.58 lbs
Lumen Maintenance	60,000h L80 B10 (Ta 25°C)
Color Consistency	—
Operating Temp.	-4°F - 113°F (installation outdoors) 32°F - 113°F (installation underwater)
IP Rating	IP65, IP68
Impact Rating	IK10
Max Depth	32.81 ft

Fixture Dimensions

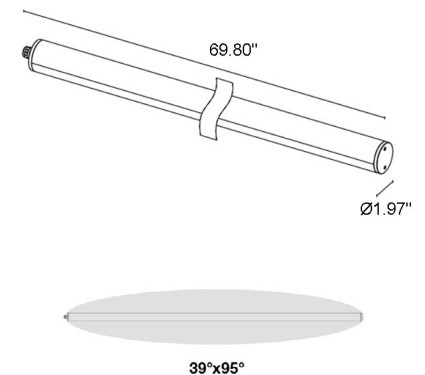

ORDERING INFORMATION

Example: TR2800000070WP. Accessories / Power Supplies ordered separately.

TR28000000	70		P
Model No.	CCT	Optics	Finish
TR28000000	70 - RGBW	W - 39°x95° D - Diffuse	P - Polycarbonate

Job Name/Date:


Fixture Type Designation:

SUGGESTED POWER SUPPLIES

STATIC WHITE - 24VDC (FOR USE WITH FOUNTAIN / WATER FEATURES)


Consult factory for power supplies.

ACCESSORIES - Installation (REQUIRED)

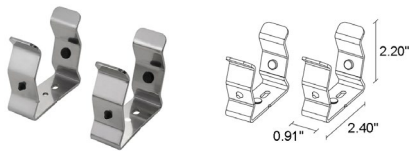

WMA04

Clips Pair

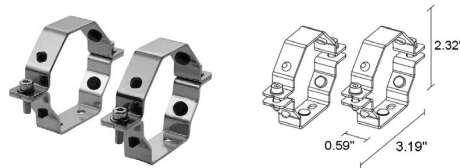

WMA05

Pair of tamper-resistant clips



WMA07

Suspension Kit


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 801.2

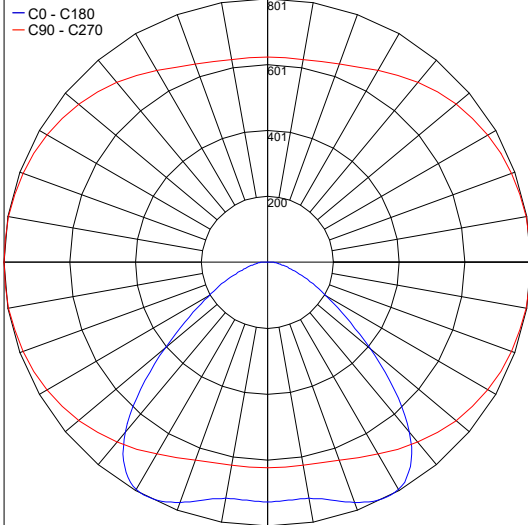


PHOTOMETRIC FILENAME : TREVI_2.8_D_3000K_75W_24VDC.IES

Maximum Candela = 1325.0

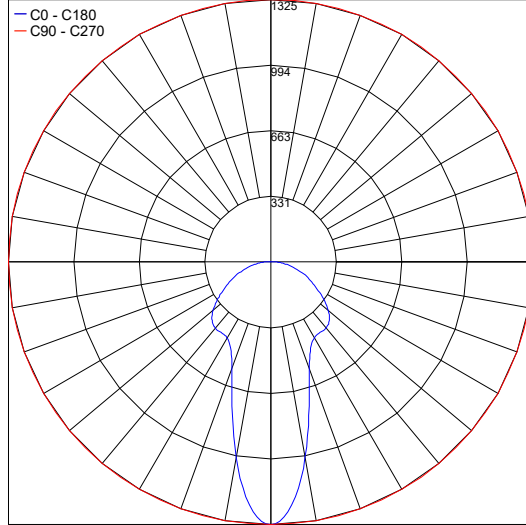


PHOTOMETRIC FILENAME : TREVI_2.8_W_39X95_3000K_75W_24VDC.IES

Maximum Candela = 1619.2

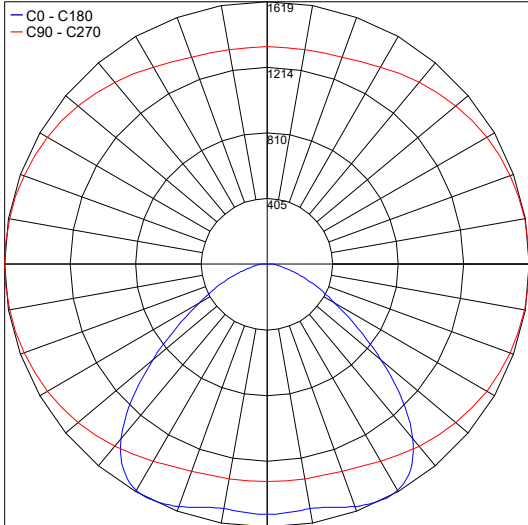

PHOTOMETRIC FILENAME : TREVI_2.8_D_RGBW_75W_24VDC.IES

Maximum Candela = 2925

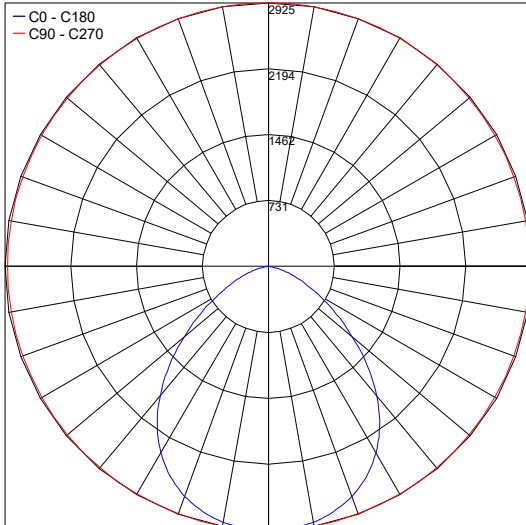

PHOTOMETRIC FILENAME : TREVI_2.8_W_39X95_RGBW_75W_24VDC.IES

Job Name/Date:

Fixture Type Designation: