X4

datasheet


X4 is an high performance, quadruple indoor floodlight suitable for surface installation on wall or ceilings. It has an adjustable arm which can be inclined up to 360°, with 22° or 50° optics. Available in 4 standard finishes.



TECHNICAL DATA

Wattage / Input	4 x 6W (500mA)
Power Supply	Remote not included, see page 2
Construction	Body: Aluminum
CCT	3000K (2700K, 4000K on request)
CRI	>90
BUG Rating	B1-U1-G0 (22°, 3000K) B1-U0-G0 (50°, 3000K)
Delivered Lumens	452 lm per beam (3000K)
Efficacy	75.3 lm/W per beam
Optics	22°, 50°
Finishes	4 Standard, see below
Fixture Dimensions	1.6” w x 19.3” l x 4.3” h
Aperture	Ø1.2” each
Fixture Weight	2.9 lbs
IP Rating	IP40

Fixture Dimensions

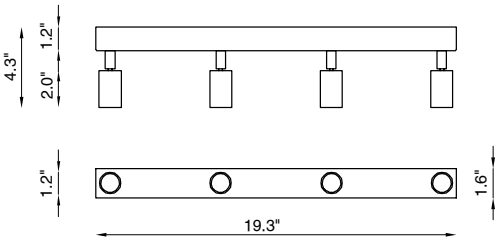

ORDERING INFORMATION

Example: BU1401.BL.2S.30.E.50.WD.US. Power Supplies ordered separately.

BU1401	.		.	2S	.		.	E	.		.	WD	.	US
Model No.		**Finish**				**CCT**				**Optics**		**Power Version**		
BU1401		**WH** - White **BL** - Black **A1** - Champagne **A2** - Rose Gold		**2S**		**27** - 2700K **30** - 3000K **40** - 4000K		**E**		**22** - 22° **50** - 50°		**WD** - Remote		**US**

Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825

© Copyright 2024 Designplan Lighting, Inc.

Published: November 4, 2026

P: 908-996-7710
F: 908-996-7042

SUGGESTED POWER SUPPLIES

500mA


Part Number	Description	Input/Output	# of Fixtures
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-1
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-1

For other power supply options consult factory.

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 1255.6

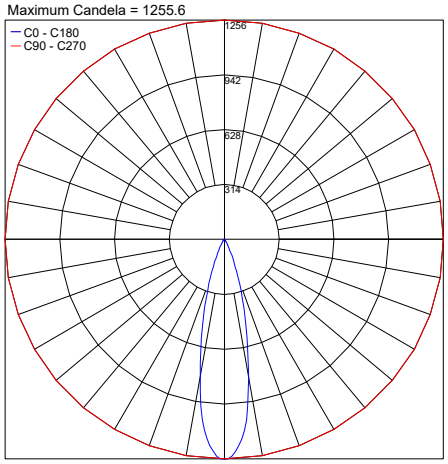

PHOTOMETRIC FILENAME : X1 22° - BU1101BL2S22E30ND.IES

Maximum Candela = 642.7

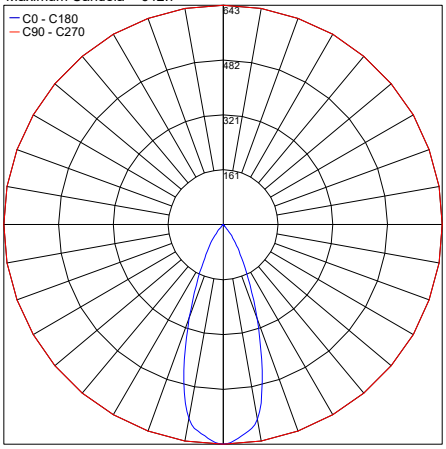

PHOTOMETRIC FILENAME : X1 50° - BU1101BL2S50E30ND.IES

Job Name/Date:

Fixture Type Designation:

© Copyright 2024 Designplan Lighting, Inc.
Published: November 4, 2026