


X4 is an high performance, quadruple indoor floodlight suitable for surface installation on wall or ceilings. It has an adjustable arm which can be inclined up to 360°, with 22° or 50° optics. Available in 4 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	4 x 6W (500mA)
<b>Power Supply</b>	Remote not included, see page 2
<b>Construction</b>	Body: Aluminum
<b>CCT</b>	3000K (2700K, 4000K on request)
<b>CRI</b>	>90
<b>BUG Rating</b>	B1-U1-G0 (22°, 3000K) B1-U0-G0 (50°, 3000K)
<b>Delivered Lumens</b>	452 lm per beam (3000K)
<b>Efficacy</b>	75.3 lm/W per beam
<b>Optics</b>	22°, 50°
<b>Finishes</b>	4 Standard, see below
<b>Fixture Dimensions</b>	1.6" w x 19.3" l x 4.3" h
<b>Aperture</b>	Ø1.2" each
<b>Fixture Weight</b>	2.9 lbs
<b>IP Rating</b>	IP40

Fixture Dimensions

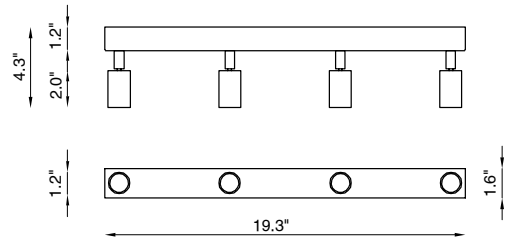

## ORDERING INFORMATION

Example: BU1401.BL.2S.30.E.50.WD.US. Power Supplies ordered separately.

BU1401	.		.	2S	.		.	E	.		.	WD	.	US
Model No.	Finish		CCT		Optics	Power Version								
BU1401	WH - White BL - Black A1 - Champagne A2 - Rose Gold	2S	27 - 2700K 30 - 3000K 40 - 4000K	E	22 - 22° 50 - 50°	WD	US							

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES



500mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 500mA, 30W, Class 2, DAMP	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-1
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-4

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note all Photometry is 3000K

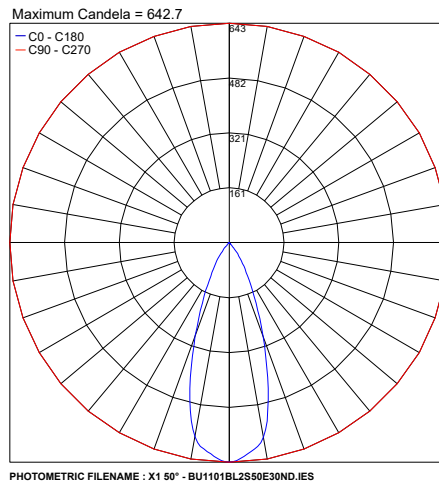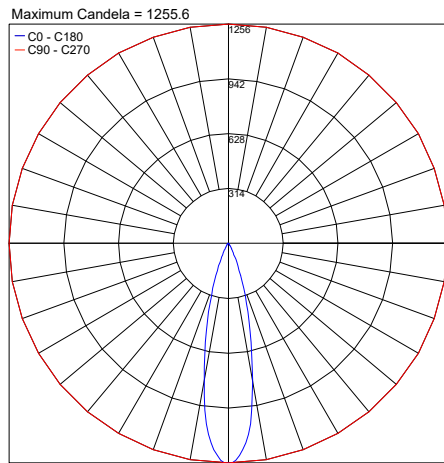

Job Name/Date:

Fixture Type Designation: