


Aster is a powerful, adjustable, round floodlight that can be installed with a stake in the ground, secured to a tree branch, or mounted to a standard surface. It comes in 3 static white versions with standard, symmetrical or wall washer optics, and an RGBW version with 5 optics choices. Available in 3 standard finishes.



TECHNICAL DATA

Wattage	20W
Power Supply	Integral 120VAC
Construction	Frame: Stainless Steel 430 Fixing Bracket Housing: Die Casted ENAB46100 Aluminum Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B2-U1-G0 (12°, 38° - 3000K) B2-U0-G0 (24° - 3000K)
CRI	>80
Delivered Lumens	1990 lm (3000K)
Efficacy	99.5 lm/W
Optics	12°, 24°, 38°
Finishes	Anthracite, ALU Gray (RAL 9006), Dark Brown
Lumen Maintenance	55,000 hrs (Ta 35°C)
Fixture Dimensions	11.14" h x 7.09" w x 5.24" deep
Aperture	Ø7.40"
IP Rating	IP66
Impact Resistance	IK08

Fixture Dimensions

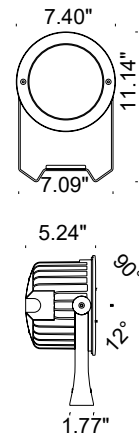

ORDERING INFORMATION


Example: F41601.1.2.11.US. Accessories ordered separately.

F41601				.US
Model No.	Finish	CCT	Optics	
F41601	1 - Anthracite 4 - ALU Grey (RAL9006) 8 - Dark Brown	2 - 2700K 3 - 3000K 4 - 4000K	11 - 12° Spot 12 - 24° Medium 13 - 38° Wide	.US


Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation

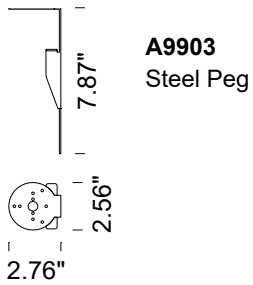


A9903
Steel Peg



A0003
Anchoring Belt
78.74" length




ACCESSORIES - Anti-Glare



A1601_
Aluminum Visor
(To be ordered together with the product)
For visor include one of the below finishes:
1 - Anthracite
4 - ALU Gray (RAL 9006)
8 - Dark Brown

PHOTOMETRIC DATA

Note: All Photometry is 3000K

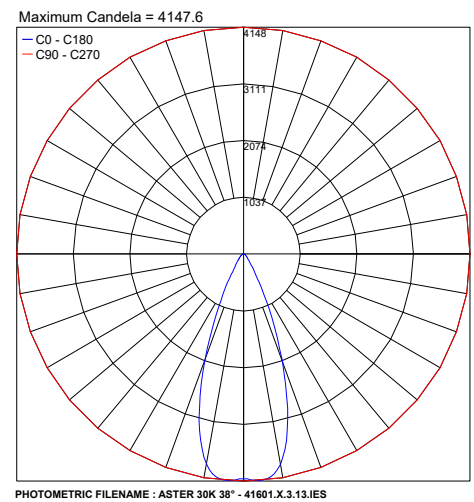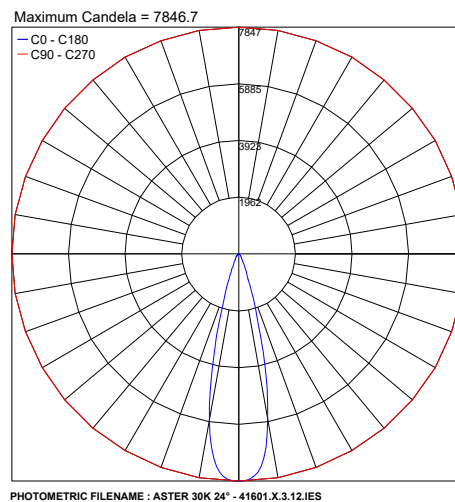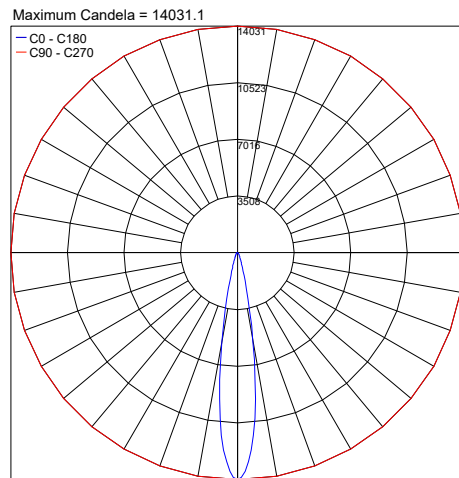

Job Name/Date:

Fixture Type Designation: