


Aster RGB+W is a powerful, adjustable, round RGBW floodlight that can be installed with a stake in the ground, secured to a tree branch, or mounted to a standard surface. It also comes in a standard (narrow, medium, wide), symmetrical, or wall washer optic versions. Available in 5 optics options and 3 standard finishes.



TECHNICAL DATA

Wattage	36W
Power Supply	Remote 24VDC not included - see page 2 On board DMX
Construction	Frame: Stainless Steel 430 Fixing Bracket Housing: Die Cast ENAB46100 Aluminum Lens: Extra Clear Tempered Glass
CCT	RGB+W
BUG Rating	—
Delivered Lumens	759 lm: (R) 100 lm, (G) 251 lm, (B) 61 lm, (W) 347 lm (6500K)
Efficacy	21.08 lm/W: (R) 2.78 lm/W, (G) 6.97 lm/W, (B) 1.69 lm/W, (W) 9.64 lm/W (6500K)
Optics	10°, 25°, 45°, 10x40°, 40x10°
Finishes	Anthracite, ALU Gray (RAL9006), Dark Brown
Lumen Maintenance	90,000 hrs (Ta 35°C)
Fixture Dimensions	11.14" h x 7.09" w x 5.24" deep
Aperture	Ø7.40"
IP Rating	IP66
Impact Resistance	IK08

Fixture Dimensions

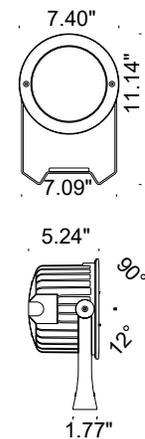

ORDERING INFORMATION

Example: F41606.1.5.01.US. Power Supplies / Accessories ordered separately.

F41606	.		.	5	.		.	.US
Model No.	Finish	CCT	Optics					
F41606	1 - Anthracite 4 - ALU Grey (RAL9006) 8 - Dark Brown	5 - RGB+W	01 - 10° Spot 36 - 25° Medium 32 - 45° Wide 70 - 10x40° 38 - 40x10°	.US				

Job Name/Date:

Fixture Type Designation:


SUGGESTED POWER SUPPLIES

24VDC


Part Number	Description	Input/Output	# of Fixtures
PPLT00288-P24	DMX / RDM (Field Addressable) / DALI	120-277VAC to 24VDC, 100W, Class 2	1-2

For other power supply options consult factory.

ACCESSORIES - Installation

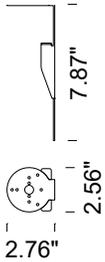


A9903
Steel Peg



A0003
Anchoring Belt
78.74" length

ACCESSORIES - Anti-Glare



A1601_
Aluminum Visor
(To be ordered together with the product)
For visor include one of the below finishes:
1 - Anthracite
4 - ALU Gray (RAL 9006)
8 - Dark Brown

ACCESSORIES

Controllers (RGBW)



[PPWD00570](#) - RGBW DMX512+Wifi Controller

Touch Sensitive

Can be controlled by WiFi

Controls 3 zones synchronously and separately

Job Name/Date:

Fixture Type Designation: