

BRICK DIRECTIONAL



BRICK is a family of thin, versatile luminaires that are available in single or double wall-mounts or as a bollard. BRICK Directional is a wall mounted version in 2 lengths with rotosymmetrical spot or medium optics, 3 color temperatures and 4 standard finishes. Dark Sky compliant for output below 80°.



TECHNICAL DATA

Wattage	7W (F30803), 14W (F30804)
Power Supply	Integral 120VAC
Construction	Housing: Die Cast ENAB46100 Aluminum Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B1-U0-G0 (3000K)
CRI	>80
Delivered Lumens	523 lm (7W, 3000K) 1046 lm (14W, 3000K) Dark Sky compliant, output below 80°
Efficacy	74.7 lm/W
Optics	10°, 30°
Finishes	Anthracite, Pure White (RAL 9010), ALU Gray (RAL 9006), Dark Brown
Lumen Maintenance	55,000 hrs (Ta 35°C)
Fixture Dimensions	5.43" l x 2.87" (F30803 - 7W) 9.37" l x 2.87" (F30804 - 14W)
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions

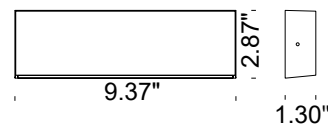

ORDERING INFORMATION


Example: F30803.1.2.01.US. Accessories ordered separately.

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Model No.	Finish	CCT	Optics	<input type="text"/>	<input type="text"/>
F30803 - 7W, 5.4" length F30804 - 14W, 9.4" length	1 - Anthracite 2 - Pure White (RAL 9010) 4 - ALU Gray (RAL 9006) 8 - Dark Brown	2 - 2700K 3 - 3000K 4 - 4000K	01 - 10° Spot 02 - 30° Medium	<input type="text"/>	<input type="text"/>
				.US	.US

Job Name/Date:

Fixture Type Designation:

ACCESSORIES




A0009_
 Custom Tab
(Specify the custom graphic design along with order)
 Include one of the below finishes:
 1 - Anthracite
 2 - Pure White (RAL 9010)
 4 - ALU Gray (RAL 9006)
 8 - Dark Brown

PHOTOMETRIC DATA

Note: All Photometry is 3000K


7W VERSION

10°

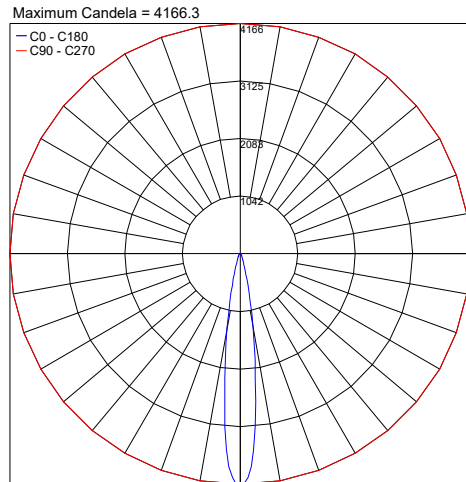

PHOTOMETRIC FILENAME : BRICK DIRECTIONAL 7W 30K 10° - 30803.X.3.01.IES


30°

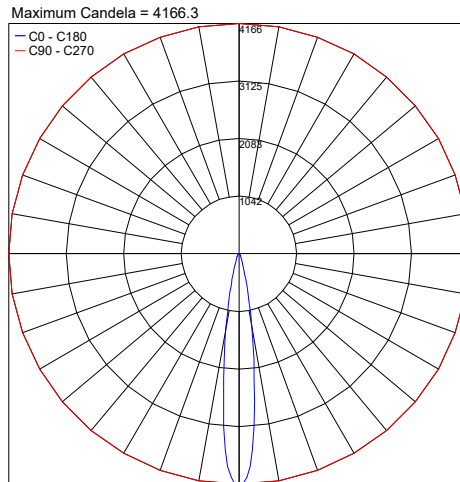

PHOTOMETRIC FILENAME : BRICK DIRECTIONAL 7W 30K 10° - 30803.X.3.01.IES


14W VERSION

10°

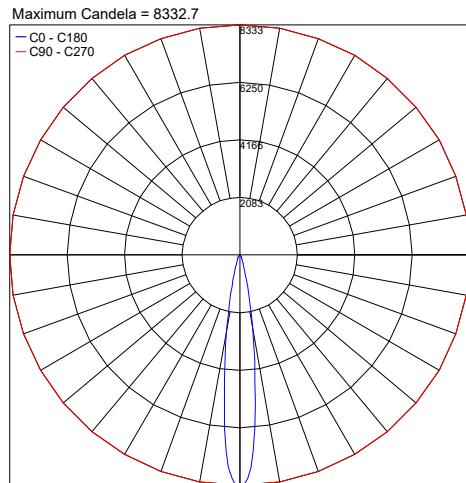

PHOTOMETRIC FILENAME : BRICK DIRECTIONAL 14W 30K 10° - 30804.X.3.01.IES

30°

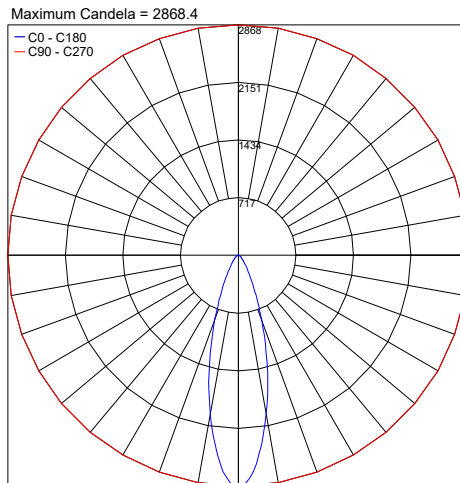

PHOTOMETRIC FILENAME : BRICK DIRECTIONAL 14W 30K 30° - 30804.X.3.02.IES

Job Name/Date:

Fixture Type Designation: