

BRICK MONO DIFFUSED



BRICK is a family of thin, versatile luminaires that are available in single or double wall-mounts or as a bollard. BRICK MONO DIFFUSED is a wall mounted version in 2 lengths with mono downlight emission, diffused optics, 3 color temperatures and 4 standard finishes. Dark Sky compliant for output below 80°.



TECHNICAL DATA

Wattage / Input	3.5W (F30808), 7W (F30809)
Power Supply	Integral 120VAC
Construction	Housing: Die Cast ENAB46100 Aluminum Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U0-G0 (3.5W, 3000K) B1-U0-G0 (7W, 3000K)
CRI	>80
Delivered Lumens	454 lm (3.5W, 3000K) 907 lm (7W, 3000K) Dark Sky compliant, output below 80°
Efficacy	129.7 lm/W
Optics	Diffuse
Finishes	Anthracite, Pure White (RAL 9010), ALU Gray (RAL 9006), Dark Brown
Lumen Maintenance	70,000 hrs (Ta 35°C)
Fixture Dimensions	5.43" x 3.33" (F30808 - 3.5W) 9.37" x 3.33" (F30809 - 7W)
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions

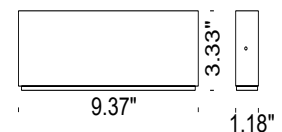

ORDERING INFORMATION


Example: F30808.1.2.05.US. Accessories ordered separately.

			05	.US
Model No.	Finish	CCT	Optics	
F30808 - 3.5W	1 - Anthracite	2 - 2700K	05 - Diffused	.US
F30809 - 7W	2 - Pure White (RAL 9010)	3 - 3000K		
	4 - ALU Gray (RAL 9006)	4 - 4000K		
	8 - Dark Brown			

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

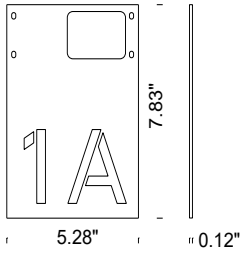


A0009_
 Custom Tab
(Specify the custom graphic design along with order)
 Include one of the below finishes:
 1 - Anthracite
 2 - Pure White (RAL 9010)
 4 - ALU Gray (RAL 9006)
 8 - Dark Brown

PHOTOMETRIC DATA

Note: All Photometry is 3000K

3.5W VERSION


Maximum Candela = 418.6

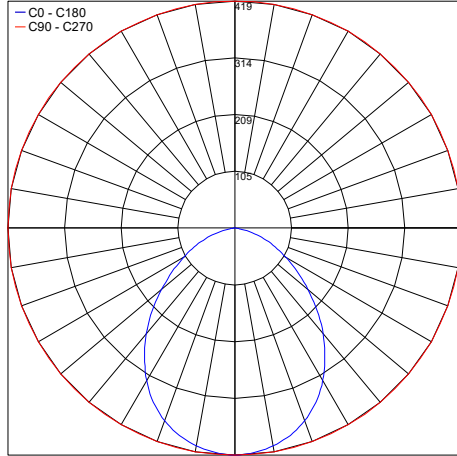

PHOTOMETRIC FILENAME : BRICK MONO 7W 30K DIFFUSE - 30809.X.3.05.IES

7W VERSION

Maximum Candela = 209.6

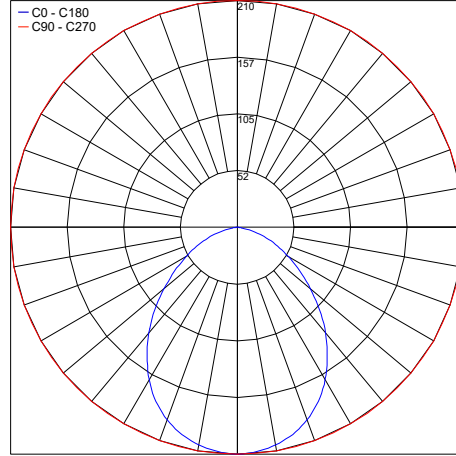

PHOTOMETRIC FILENAME : BRICK MONO 3.5W 30K DIFFUSE - 30808.X.3.05.IES

Job Name/Date:

Fixture Type Designation: