

BRICK

MINIATURIZATION IS OFTEN SEEN AS AN ALL-AROUND PROGRESS IN DESIGN, BUT EQUALLY OFTEN THE SIZE REDUCTION UNFORTUNATELY TURNS OUT TO ALSO BE A REDUCTION IN PERFORMANCE. FRANCESCONI, HOWEVER, DOESN'T DISAPPOINT WITH BRICK, A MINIMALIST YET DEFINED LUMINAIRE THAT'S VERY VERSATILE AND EASY TO INSTALL. BRICK ALSO HAS A MINIMAL IMPACT ON THE ARCHITECTURE IT ILLUMINATES.

COMMON FEATURES:

- DIE CASTED ENAB46100 ALUMINUM HOUSING.
- HIGH-RESISTANCE DOUBLE PAINTING PROCESS (UNI ISO9227:2012 SALINE TEST COMPLIANT).
- A4 STAINLESS STEEL SEALING ALLEN SCREWS.
- EXTRA CLEAR TEMPERED GLASS SCREEN.
- SINGLE-CABLE INPUT, BRASS CABLE BLOCKER IP66 FOR UNIPOLAIRE CABLES.
- EPDM GASKET.
- COMPLIANT EN60598-1 AND RELATED ANNEX.

BOLLARD-SPECIFIC FEATURES:

- 6026 ANTICORODAL ALUMINUM HOUSING.
- STAINLESS STEEL 430 FIXING BASE.
- SINGLE-CABLE INPUT, PRE-ASSEMBLED WITH NEOPRENE CABLE AND IP68 WATER-STOP FAST CONNECTOR.

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com


Tel: (908) 996-7710
Fax: (908) 996-7042



NO WORRIES: IT'S THIN!

DON'T BELIEVE THOSE WHO TELL YOU THAT SIZE DOESN'T MATTER! WITH ITS 1.38" DEPTH, THE WALL-MOUNTED VERSION OF BRICK IS BY FAR ONE OF THE THINNEST YOU WILL FIND ON THE MARKET, MAKING IT THE IDEAL PRODUCT FOR ENHANCING ARCHITECTURE WITHOUT OVERPOWERING IT. ITS SMALL SIZE ALSO ALLOWS FOR QUICK AND EASY ASSEMBLY, WITHOUT THE NEED FOR INCONVENIENT AND IMPRECISE INSTALLATIONS ON PRE-EXISTING STONEWORK.

YOUR NEEDS MATTER

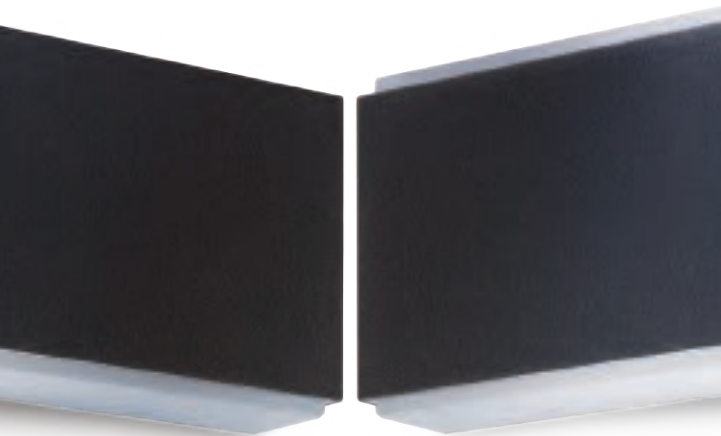

WHETHER YOU ARE LOOKING FOR TARGETED LIGHTING ON A WALL, OR A MORE DIFFUSED EFFECT, BRICK WILL ALWAYS HAVE AN ADEQUATE RESPONSE, EVEN IN LARGE SPACES.

IT ALL DEPENDS ON THE POSITIONING OF THE GLASS OF THE LIGHT FIXTURE. THE MODELS WITH MORE CONCENTRATED LIGHT WILL HAVE MORE OF A FOCUS POINT, WHILE THE MODELS THAT FULLY UTILIZE THE REFRACTION OF THE GLASS WILL PROVIDE A MORE DIFFUSED LIGHT, SOFTLY ILLUMINATING THE SURROUNDING SPACE WITHOUT ANY GLARE.

WAIT, NO WALLS?

WHAT IF YOU WANT ALL THE BENEFITS OF BRICK BUT YOU DON'T HAVE ANY WALLS? NO PROBLEM! THE BOLLARD VERSION IS JUST AS MINIMALISTIC AS THE WALL-MOUNTED VERSION, MAINTAINING THE SAME SLEEKNESS AND VISUAL COMFORT.

BUT THAT'S NOT ALL: WE HAVE EXPANDED THE ENTIRE LINE WITH NEW ASYMMETRICAL LONGITUDINAL AND TRANSVERSE OPTICS, PERFECT FOR PEDESTRIAN AND CYCLE PATHS (AND MORE).




SPECIAL LENSES FOR SPECIAL TASKS

BRICK IS A PRODUCT THAT FITS INTO ANY ARCHITECTURAL CONTEXT.

BUT THE REAL BEATING HEART OF THE COLLECTION IS ITS VERY VAST PHOTOMETRIC PROPOSAL. IT PROVIDES SINGLE OR DOUBLE EMISSION LIGHTING IN THE DIFFUSED LIGHT VERSION WITH LENSES FOR SPOTLIGHTING, AND WALL WASHERS.

IN SHORT, WHATEVER YOUR IDEA OF LIGHT IS, BRICK WILL BE ABLE TO PROVIDE IT.

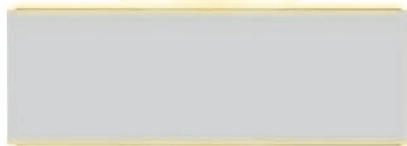











BRICK APPLIQUE MONO EMISSION



DIRECTIONAL

WALL WASHER AND DIFFUSED





PERFORMANCE DATA

TRUE POWER (W)	7.0	14.0	7.0	14.0
TRUE LUMENS (3000K)	523 (.01)	1046 (.01)	509 (.05)	1018 (.05)
TRUE LUMENS (4000K)	545 (.01)	1090 (.01)	530 (.05)	1050 (.05)
L90 LIFETIME (HRS)	55,000 (Ta 35°C)	55,000 (Ta 35°C)	70,000 (Ta 35°C)	70,000 (Ta 35°C)

BUILD DATA

NOMINAL VOLTAGE	120V 50/60Hz	120V 50/60Hz	120V 50/60Hz	120V 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF	INCLUDED ON-OFF	INCLUDED ON-OFF
EXTERNAL CABLE	SINGLE INPUT - NONE	SINGLE INPUT - NONE	SINGLE INPUT - NONE	SINGLE INPUT - NONE
PROTECTION RATING	IP65 - IK08	IP65 - IK08	IP65 - IK08	IP65 - IK08
OPENINGS	ROTOSYMMETRICAL	ROTOSYMMETRICAL	WALL WASHER / DIFFUSED	WALL WASHER / DIFFUSED

DIMENSIONS



CODE COMPOSITION

	30803	30804	30801	30802
● FINISH	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN
■ LED COLOR	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80
▲ BEAM	.01 - 10° SPOT .02 - 30° MEDIUM	.01 - 10° SPOT .02 - 30° MEDIUM	.07 - WALL WASHER .05 - DIFFUSED	.07 - WALL WASHER .05 - DIFFUSED

BRICK APPLIQUE MONO EMISSION




PERFORMANCE DATA

TRUE POWER (W)	3.5	7.0
TRUE LUMENS (3000K)	454 (.05)	907 (.05)
TRUE LUMENS (4000K)	486 (.05)	972 (.05)
L90 LIFETIME (HRS)	70,000 (Ta 35°C)	70,000 (Ta 35°C)

BUILD DATA

NOMINAL VOLTAGE	120V 50/60Hz	120V 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF
EXTERNAL CABLE	SINGLE INPUT - NONE	SINGLE INPUT - NONE
PROTECTION RATING	IP65 - IK08	IP65 - IK08
OPENINGS	DIFFUSED	DIFFUSED


DIMENSIONS



CODE COMPOSITION

	30808	30809
● FINISH	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN
■ LED COLOR	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80
▲ BEAM	.05 - DIFFUSED	.05 - DIFFUSED

ACCESSORIES



CUSTOM TAB
(SPECIFY THE CUSTOM
GRAPHIC DESIGN ALONG
WITH ORDERS)

A0009

-
- .1 - ANTHRACITE
- .2 - PURE WHITE (RAL9010)
- .4 - ALU GREY (RAL9006)
- .8 - DARK BROWN

BRICK APPLIQUE DOUBLE EMISSION




PERFORMANCE DATA

TRUE POWER (W)	7.0	14.0
TRUE LUMENS (3000K)	908 (.05)	1814 (.05)
TRUE LUMENS (4000K)	972 (.05)	1944 (.05)
L90 LIFETIME (HRS)	70,000 (Ta 35°C)	70,000 (Ta 35°C)

BUILD DATA

NOMINAL VOLTAGE	120V 50/60Hz	120V 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF
EXTERNAL CABLE	SINGLE INPUT - NONE	SINGLE INPUT - NONE
PROTECTION RATING	IP65 - IK08	IP65 - IK08
OPENINGS	DIFFUSED	DIFFUSED


DIMENSIONS



CODE COMPOSITION

	30810	30811
● FINISH	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN
■ LED COLOR	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80
▲ BEAM	.05 - DIFFUSED	.05 - DIFFUSED

ACCESSORIES



CUSTOM TAB
(SPECIFY THE CUSTOM
GRAPHIC DESIGN ALONG
WITH ORDERS)

A0009



- .1 - ANTHRACITE
- .2 - PURE WHITE (RAL9010)
- .4 - ALU GREY (RAL9006)
- .8 - DARK BROWN

BRICK BOLLARD




PERFORMANCE DATA

TRUE POWER (W)	10.0	10.0	10.0
TRUE LUMENS (3000K)	823 (.64)	823 (.64)	868 (.65)
TRUE LUMENS (4000K)	857 (.64)	857 (.64)	904 (.65)
L90 LIFETIME (HRS)	70,000 (Ta 35°C)	70,000 (Ta 35°C)	70,000 (Ta 35°C)

BUILD DATA

NOMINAL VOLTAGE	120V 50/60Hz	120V 50/60Hz	120V 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF	INCLUDED ON-OFF
OVERVOLTAGE PROTECTION	10Kv	10Kv	10Kv
EXTERNAL CABLE	SINGLE INPUT	SINGLE INPUT	SINGLE INPUT
	3-POLES NEOPRENE	3-POLES NEOPRENE	3-POLES NEOPRENE
	IP68 FAST CONNECTION	IP68 FAST CONNECTION	IP68 FAST CONNECTION
PROTECTION RATING	IP65 - IK08	IP65 - IK08	IP65 - IK08
OPENINGS	MONO EMISSION	MONO EMISSION	MONO EMISSION


DIMENSIONS

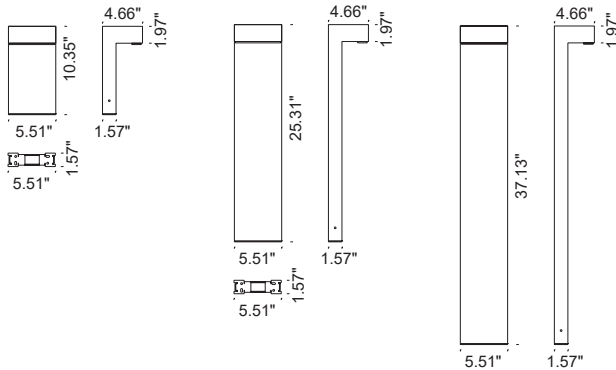

CODE COMPOSITION



	60801	60802	60803
● FINISH	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN	.1 - ANTHRACITE .2 - PURE WHITE (RAL9010) .4 - ALU GREY (RAL9006) .8 - DARK BROWN
■ LED COLOR	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80	.2 - 2700°K - CRI > 80 .3 - 3000°K - CRI > 80 .4 - 4000°K - CRI > 80
▲ BEAM	.64 - MONOEMISSION	.64 - MONOEMISSION	.65 - TRANSVERSE ELLIPTICAL

ACCESSORIES



COACH PLATE

A9904



GROUND MOUNT SPACER

A0120