

CLASS MINI


CLASS MINI is a well designed family of square luminaires that can be used as a wall mount or bollard, offering flexibility with a multitude of light combinations. CLASS MINI wall mounted version is available in single or double, up/down light emission, 4 optic options, and 4 standard finishes.



TECHNICAL DATA

Wattage	17W - Single (F31103), 33W - Double (F31112)
Power Supply	Integral 120VAC
Construction	Housing: Die Cast ENAB46100 Aluminum Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B2-U0-G0 (17W - 10°, 25°) B1-U0-G0 (17W - 65°, 115°x20°) B2-U5-G0 (33W - 10°, 25°) B1-U5-G0 (33W - 65°, 115°x20°)
CRI	>80
Delivered Lumens	1230 lm per beam (3000K)
Efficacy	72.4 lm/W per beam
Optics	10°, 25°, 115°x20°, 65°
Finishes	Anthracite, Pure White (RAL 9010), ALU Gray (RAL 9006), Dark Brown
Lumen Maintenance	40,000 hrs (Ta 35°C)
Fixture Dimensions	7.09" x 7.09" Cover 5.83" w x 7.17" h
Aperture Dimensions	5.67" x 3.07"
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions

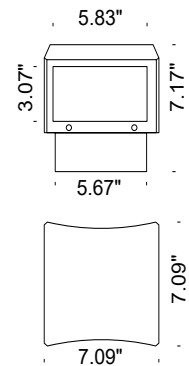

ORDERING INFORMATION

Example: F31103.1.2.01.US.


<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Model No.	Finish	CCT	Optics	.US	
F31103 - 17W Single	1 - Anthracite	2 - 2700K	01 - 10° Spot	.US	
F31112 - 33W Double	2 - Pure White (RAL9010)	3 - 3000K	36 - 25° Medium		
	4 - ALU Grey (RAL9006)	4 - 4000K	37 - 115°x20° Elliptical		
	8 - Dark Brown		34 - 65° Wide		

Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note all Photometry is 3000K

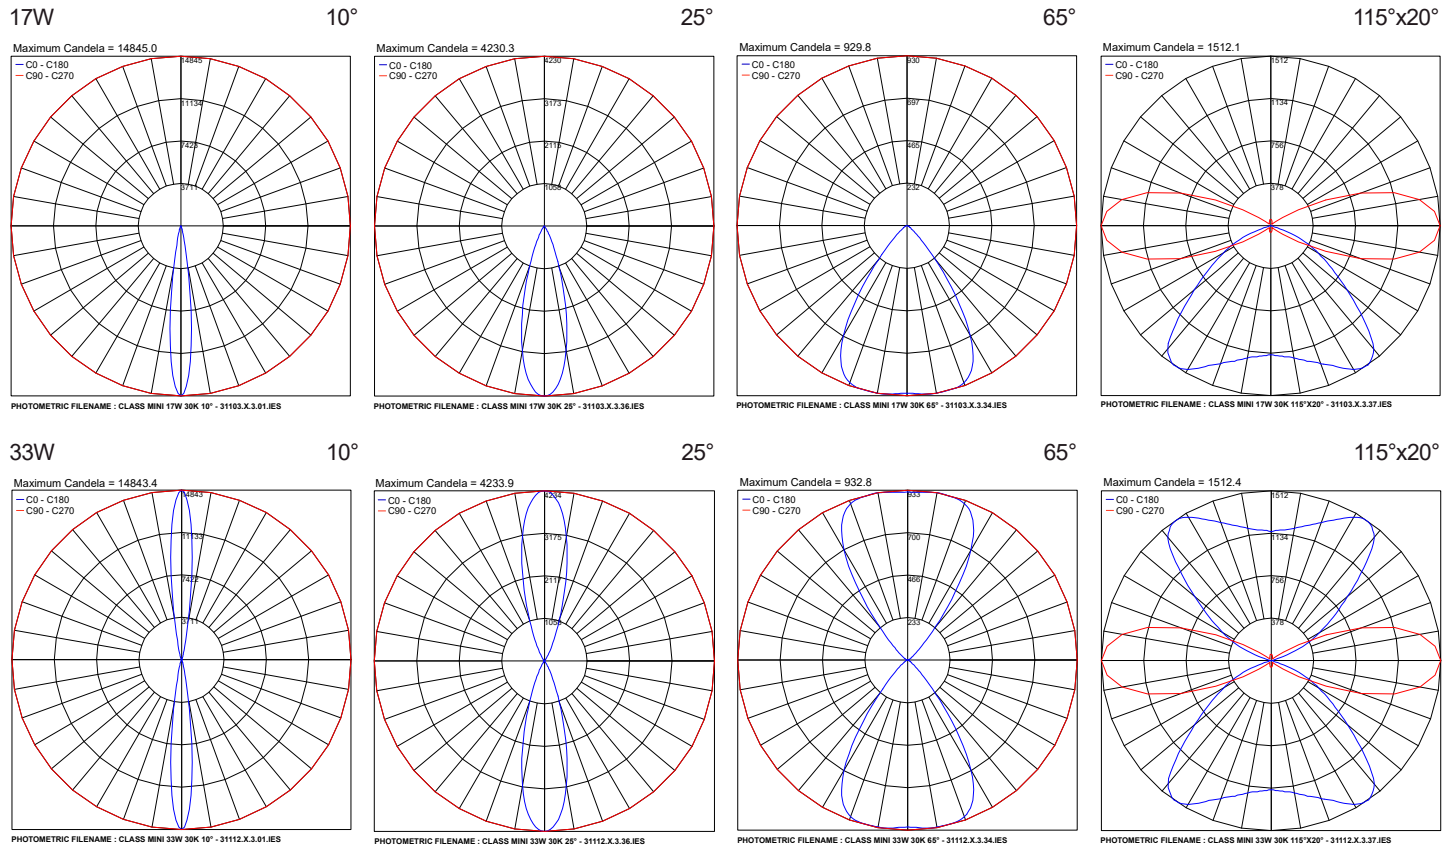

Job Name/Date:

Fixture Type Designation: