

EIGHT PENDANT

Eight (8) Pendant is a minimalist lighting solution perfect for indoor offices, schools or residential environments. Small details such as no power cord maintain the minimalistic idea without sacrificing function in the field. It is available in 2, 4 or 8 foot lengths with multiple color temperatures and finish options.




MADE IN THE U.S.A.

TECHNICAL DATA

Wattage	20W (24"), 40W (48"), 80W (96")
Power Supply	Integral 120-277VAC
Dimming	0-10V Dimming
Construction	Body: Extruded Aluminum Mounting: Aircraft Cable
CCT	2700K, 3000K, 4000K
CRI	Coming Soon
Delivered Lumens	1500 lm (20W, 3000K) 3000 lm (40W, 3000K) 5400 lm (80W, 3000K)
Efficacy	75 lm/W (20W, 3000K) 75 lm/W (40W, 3000K) 67.5 lm/W (80W, 3000K)
Optics	15°, 30°, 48°
Finishes	4 Standard, Custom RAL on request
Fixture Dimensions	24.0" l x 0.63" w x 3.0" h 48.0" l x 0.63" w x 3.0" h 96.0" l x 0.63" w x 3.0" h
IP Rating	IP20

Fixture Dimensions

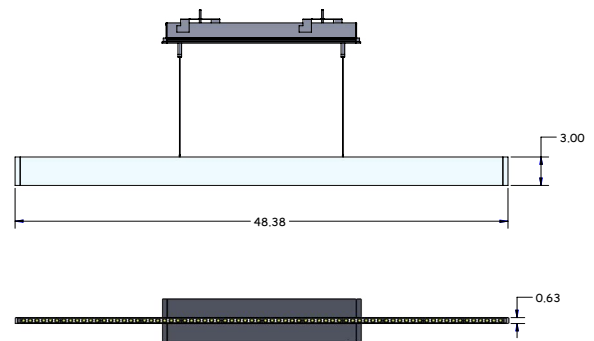

ORDERING INFORMATION

Example: P80-0-2-30-P-48-02-C-RC. Accessories ordered separately.

P80-0 - [] - [] - [] [] [] - [] - []

Model #	Length	CCT	Body	Optics	Finish	Driver	Canopy
P80-0	2 - 24" (2 ft)	27 - 27K	P - Pendant	15 - 15°	02 - Black Suede	C - 120-277VAC, 0-10V Dimming	RC - Recessed*
	4 - 48" (4 ft)	30 - 30K		30 - 30°	18 - Textured Bronze		SC - Surface*
	8 - 96" (8 ft)	40 - 40K		48 - 48°	TS - Silver		RW - Recessed, White
					11 - White Suede	2 - 347VAC, 0-10V Dimming	SW - Surface, White
					C - Custom RAL		AS - Surface Acoustic Tile*
							AW - Surface Acoustic Tile, White


There is no visible canopy with the recessed version. The support cables simply pierce the ceiling. Recessed wiring box (J-box) is above the ceiling. Fixture supplied with full size metal flexible template for locating the support cables. Each fixture comes with 2 cables and 2 wiring boxes.

* Same finish as fixture
- Other color on request -

Job Name/Date:

Fixture Type Designation:

ACCESSORIES



Recessed Power Support - INCLUDED
2 per length included

Job Name/Date:

Fixture Type Designation: