

Hydrofloor Nano Linear Wall Washer is a recessed in-grade linear profile suitable for outdoor installation. It is available in the standard version with trim (209002P) or trimless (209005P) with 3 color temperatures, 3 optics options and a stainless steel finish. Driveover rated to 6614 lbs.



With Trim (209002P)



Trimless (209005P)

Fixture Dimensions - see page 2

TECHNICAL DATA

Wattage / Input	6W (500mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Hard Anodized Aluminum Trim: Stainless steel AISI 316L Lens: Tempered, Safety Glass Cable Length: 3.28'
CCT	2700K, 3000K, 4000K
Delivered Lumens	470 lm (3000K)
Efficacy	78.3 lm/W (3000K)
Optics	Wall Washer
Finishes	Stainless Steel
Fixture Dimensions	4.02" x 1.50" x 1.32" h (209002P - with trim) 3.70" x 1.22" x 1.26" h (209005P - trimless)
Fixture Weight	1.10 lbs
LED Source	16 x mid-power SAMSUNG 2835 LED
IP Rating	IP68
IK Rating	IK08
Driveover Rating	Up to 6614 lbs

ORDERING INFORMATION


Example: 209002P.27.WW.SS. Power Supplies / Accessories ordered separately.

		WW	SS
Model No.	CCT	Optic	Finish
209002P - WW with trim	27 - 2700K	WW - Wall Washer	SS - Stainless Steel
209005P - WW trimless	30 - 3000K		
	40 - 4000K		

Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

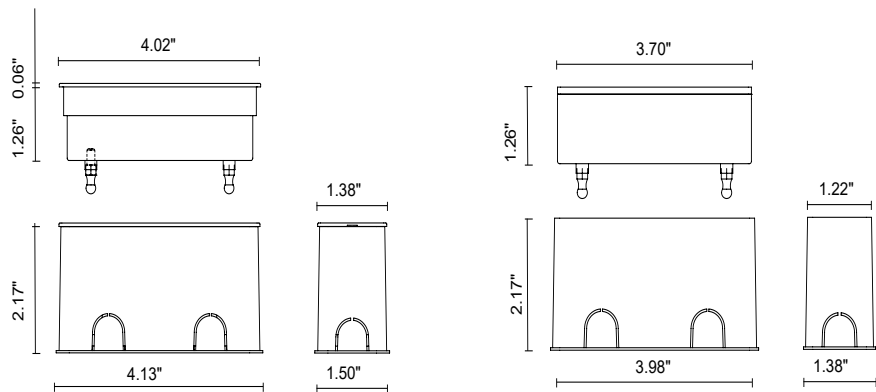

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2, DAMP	1-1
PPLT00469	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-2
PPLT00262	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-3
PPLT00561-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W, Class 2	1-4

Suggested Lutron Compatible - 500mA

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00259	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 10W, Class 2	1-1
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	2-3
PPLT00676	PEQE	PEQ0	100%-0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ Fade to Black	120-277VAC to 500mA, 20W, Class 2	1-3
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	3-4

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

ACCESSORIES





Backbox included

209002P

209005P

PHOTOMETRIC DATA

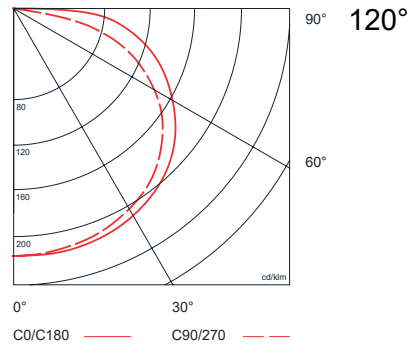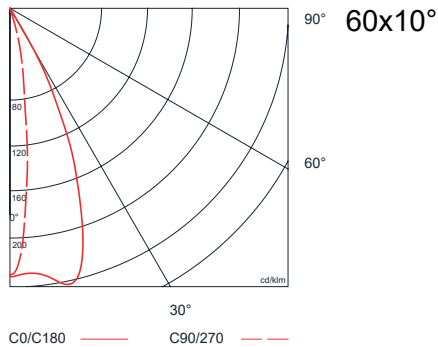

Job Name/Date:

Fixture Type Designation: