

SLIM FLOODLIGHT RGBW


SLIM is a family of surface mounted, LED luminaires that have a clean, minimalistic look with high power and a completely concealed fixing system allowing for easy installation. Perfect for residential, public spaces, urban street lighting or museums, it comes as a wall mount, floodlight or pole mounted. SLIM FLOODLIGHT RGBW is an adjustable, surface mounted RGBW version that comes in 5 optics options and 4 standard finishes.



TECHNICAL DATA

Wattage	56W
Power Supply	Integral 120VAC
Construction	Frame: Stainless Steel 316L Bracket Housing: Die Cast ENAB46100 Aluminum Lens: Extra Clear Tempered Glass
CCT	RGBW
BUG Rating	—
CRI	—
Delivered Lumens	1266 lm: (R) 167 lm, (G) 419 lm, (B) 101 lm, (W) 579 lm (6500K)
Efficacy	22.61 lm/W: (R) 2.98 lm/W, (G) 7.48 lm/W, (B) 1.80 lm/W, (W) 10.34 lm/W (6500K)
Optics	10°, 25°, 45°, 40°x 10°, 10°x 40°
Finishes	Anthracite, Pure White (RAL 9010), ALU Gray (RAL 9006), Dark Brown
Lumen Maintenance	L90, 60,000 hrs (Ta 35°C)
Fixture Dimensions	8.58" w x 12.17" l
Aperture Dimensions	7.60" x 6.57"
IP Rating	IP66
Impact Resistance	IK08

Fixture Dimensions

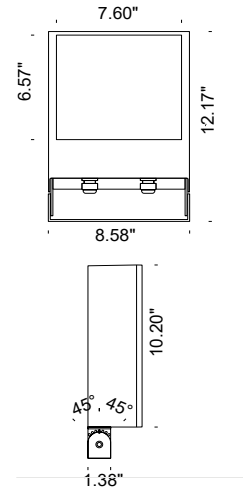

ORDERING INFORMATION

Example: F40909.1.5.01.US. Power Supplies / Accessories ordered separately.

F40909		5		.US
Model No.	Finish	CCT	Optics	
F40909 - RGBW	1 - Anthracite 2 - Pure White (RAL 9010) 4 - ALU Gray (RAL 9006) 8 - Dark Brown	5 - RGBW	01 - 10° Spot 36 - 25° Medium 32 - 45° Wide 38 - 40°x 10° 70 - 10°x 40°	.US

Job Name/Date:

Fixture Type Designation:


SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00288-P24	DMX / RDM (Field Addressable) / DALI	120-277VAC to 24VDC, 100W, Class 2	1-1

For other power supply options consult factory.

ACCESSORIES

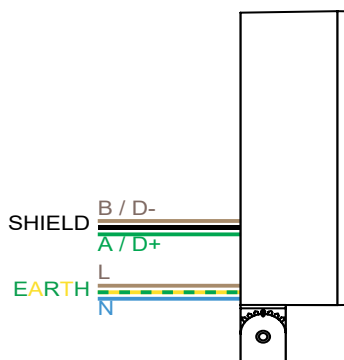

D041
Touch Panel
3.39" x 3.39" x 1.42"

C106
RDM Address Programming Device on DMX Cable

Job Name/Date:

Fixture Type Designation: