

SLIM FLOODLIGHT


SLIM is a family of surface mounted, LED luminaires that have a clean, minimalistic look with high power and a completely concealed fixing system allowing for easy installation. Perfect for residential, public spaces, urban street lighting or museums, it comes as a wall mount, floodlight or pole mounted. SLIM FLOODLIGHT is a surface mounted version that comes in a 10° spot or various optics versions with 4 standard finishes.



TECHNICAL DATA

Wattage	26W (Spot 10°), 45.3W (Various Optics)
Power Supply	Integral 120VAC
Construction	Frame: Stainless Steel 316L Bracket Housing: Die Cast ENAB46100 Aluminum Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B3-U0-G0 (10°, 25°, 50°) B3-U0-G1 (24°X50°, 50°X24°)
CRI	>80
Delivered Lumens	2680 lm (3000K - Spot 10°) 5640 lm (3000K - Various Optics, see below)
Efficacy	103.7 lm/W (3000K - Spot 10°) 124.5 lm/W (3000K - Various Optics, see below)
Optics	10°, 25°, 50°, 50°x 24°, 24°x 50° Asymmetrical, Wall Washer
Finishes	Anthracite, Pure White (RAL 9010) ALU Gray (RAL 9006), Dark Brown
Lumen Maintenance	L90, 90,000 hrs (Ta 35°C)
Fixture Dimensions	8.58" w x 12.17" l
Aperture Dimensions	7.60" x 6.57"
IP Rating	IP66
Impact Resistance	IK08

Fixture Dimensions

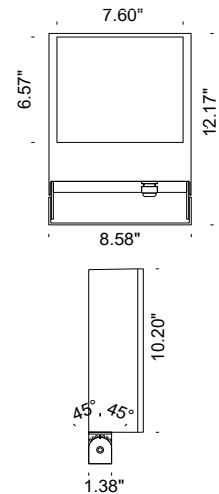

ORDERING INFORMATION

Example: **F40907.1.2.36.US**.

				.US
Model No.	Finish	CCT	Optics	
F40906 - Spot 10° (F40906 only)	1 - Anthracite	2 - 2700K	01 - 10° Spot (F40906 only)	.US
F40907 - Various Optics <i>(choose one from the optics)</i>	2 - Pure White (RAL 9010)	3 - 3000K	36 - 25° Medium	
	4 - ALU Gray (RAL 9006)	4 - 4000K	03 - 50° Wide	
	8 - Dark Brown		53 - 50°x 24° Elliptical	
			52 - 24°x 50° Elliptical	
			06 - Asymmetrical	
			07 - Wall Washer	


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: All Photometry is 3000K

Maximum Candela = 37319.2

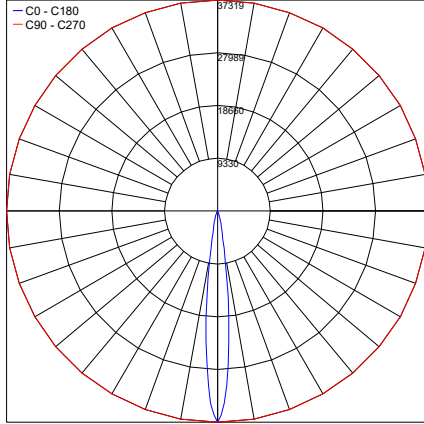


PHOTOMETRIC FILENAME : SLIM FLOODLIGHT 30K 10° - 40906.X.3.01.IES

Maximum Candela = 10316.4

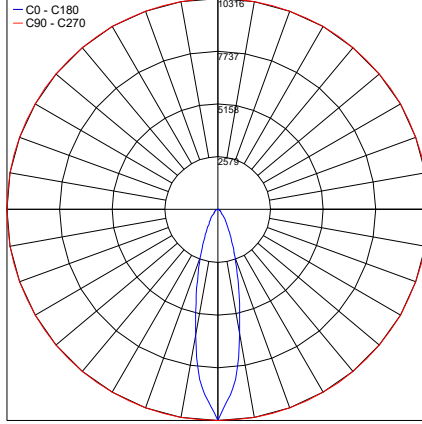


PHOTOMETRIC FILENAME : SLIM FLOODLIGHT 30K 24°X50° - 40907.X.3.52.IES

Maximum Candela = 15914.4

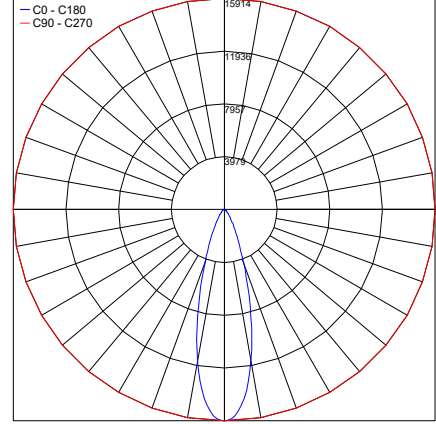


PHOTOMETRIC FILENAME : SLIM FLOODLIGHT 30K 25° - 40907.X.3.36.IES

Maximum Candela = 6574.5

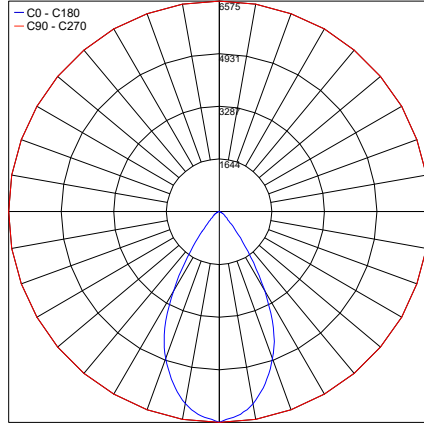

PHOTOMETRIC FILENAME : SLIM FLOODLIGHT 30K 50° - 40907.X.3.03.IES

Maximum Candela = 10316.4

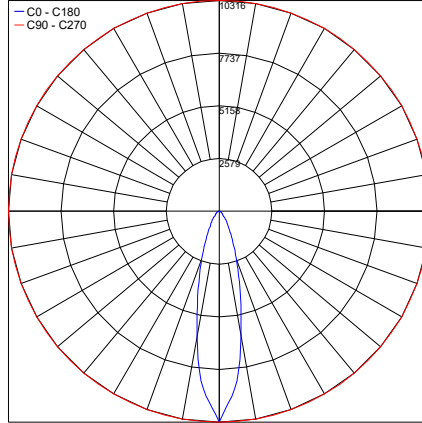

PHOTOMETRIC FILENAME : SLIM FLOODLIGHT 30K 50°X24° - 40907.X.3.53.IES

Job Name/Date:

Fixture Type Designation: