


SLIM is a family of surface mounted, LED luminaires that have a clean, minimalistic look with high power and a completely concealed fixing system allowing for easy installation. Perfect for residential, public spaces, urban street lighting or museums, it comes as a wall mount, floodlight or pole mounted. SLIM MINI is a wall mounted version that comes with mono or double emission in static white and 4 standard finishes.



TECHNICAL DATA

Wattage	11.5W (Mono), 22W (Double)
Power Supply	Integral 120VAC
Construction	Frame: Stainless Steel 316L Bracket Housing: Die Cast ENAB46100 Aluminum Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B1-U0-G0 (MONO - 20°, 35°, WW) B0-U0-G0 (MONO - ASYM) B1-U5-G0 (DOUBLE - 20°, WW) B1-U4-G0 (DOUBLE - 35°) B0-U5-G0 (DOUBLE - ASYM)
CRI	>80
Delivered Lumens	1093 lm (Mono - 3000K) 2157 lm (Double - 3000K)
Efficacy	95.0 lm/W (Mono - 3000K) 98.0 lm/W (Double - 3000K)
Optics	20°, 35°, Asymmetrical, Wall Washer
Finishes	Anthracite, Pure White (RAL 9010), ALU Gray (RAL 9006), Dark Brown
Lumen Maintenance	L90, 72,000 hrs (Ta 35°C)
Fixture Dimensions	8.66" l x 3.94" w x 2.36" h
Aperture Dimensions	7.68" x 1.65"
IP Rating	IP66
Impact Resistance	IK08

Fixture Dimensions

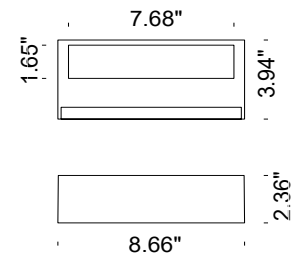

ORDERING INFORMATION

Example: F30905.1.2.20.US.

				.US
Model No.	Finish	CCT	Optics	
F30905 (Mono Emission)	1 - Anthracite	2 - 2700K	20 - 20° Narrow	.US
F30927 (Double Emissions)	2 - Pure White (RAL 9010)	3 - 3000K	50 - 35° Medium	
	4 - ALU Gray (RAL 9006)	4 - 4000K	06 - Asymmetrical	
	8 - Dark Brown		07 - Wall Washer	

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA


Note all Photometry is 3000K

MONO


20°

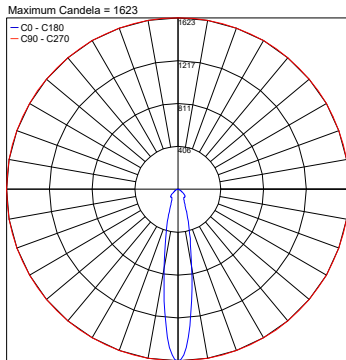


35°

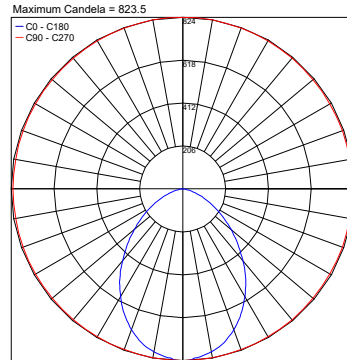

ASYM

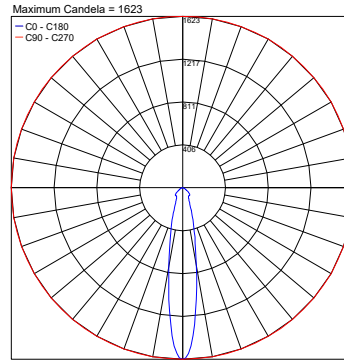


WW

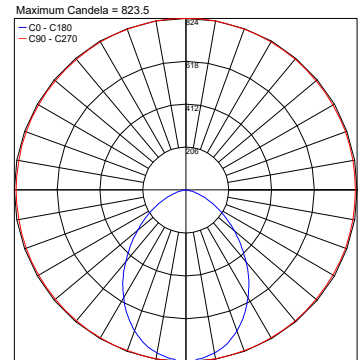


DOUBLE


20°

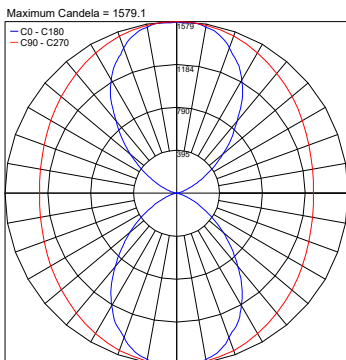


35°

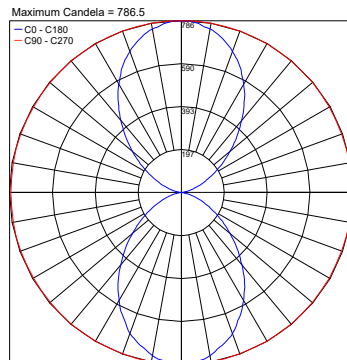

ASYM

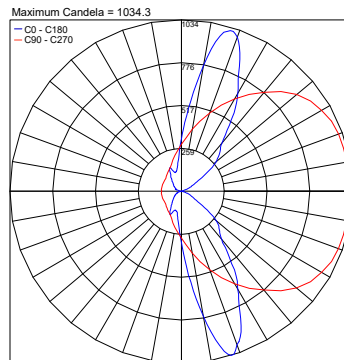

WW

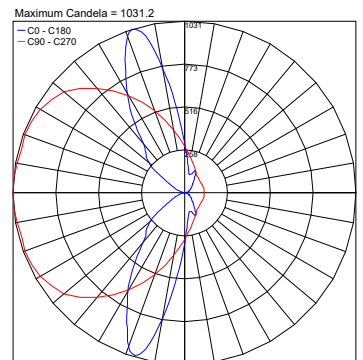

Job Name/Date:

Fixture Type Designation: