

# TREVI S 2.6


Trevi S is a suspended version of the distinctive Trevi linear profile that is a simple and elegant lighting solution with a wide range of optics suitable for outdoor applications, such as the terraces of hotels and restaurants or indoor applications, such as reception areas. Trevi S 2.6 is the 25.7" length version offering RGBW light with diffuse or elliptical optics.



## TECHNICAL DATA

<b>Wattage / Input</b>	25W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	End Caps: AISI 316L Stainless Steel Heat Sink: Internal Anticorodal Aluminum Lens: Transparent Polycarbonate Cable Length: 16.4 ft
<b>CCT</b>	RGBW
<b>BUG Rating</b>	B0-U1-G0 (3000K, Diffuse) B1-U1-G0 (RGBW/3000K, Diffuse, 39°x95°)
<b>Delivered Lumens</b>	1435 lm (Diffuse) (R) 162 lm (G) 599 lm (B) 112 lm (W) 670 lm (3000K)
<b>Efficacy</b>	57.4 lm/W (Diffuse) (R) 6.5 lm/W (G) 24.0 lm/W (B) 4.5 lm/W (W) 26.8 lm/W
<b>Optics</b>	39°x95°, Diffuse
<b>Finish</b>	Polycarbonate
<b>Fixture Dimensions</b>	Ø1.97" x 25.71" l
<b>Fixture Weight</b>	5.84 lbs
<b>LED Source</b>	168 mid-power LEDs
<b>Lumen Maintenance</b>	60,000h L80 B10 (Ta 25°C)
<b>Color Consistency</b>	-
<b>Operating Temp.</b>	-4°F - 113°F
<b>IP Rating</b>	IP65, IP68
<b>Impact Rating</b>	IK10

Fixture Dimensions

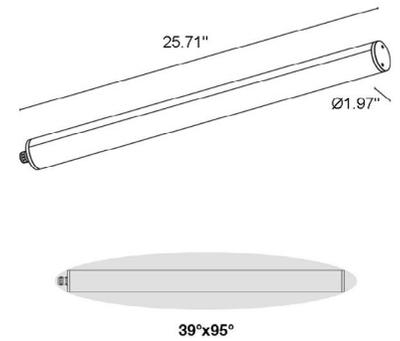

## ORDERING INFORMATION

Example: TR2600000070WP+WMA07+WMA04 Accessories / Power Supplies ordered separately.

TR26000000	70		P	+	WMA07	+	
<b>Model No.</b>	<b>CCT</b>	<b>Optics</b>	<b>Finish</b>		<b>Suspension Kit</b>		<b>Clip</b>
TR26000000	70 - RGBW	W - 39°x95° D - Diffuse	P - Polycarbonate		WMA07 - Suspension Kit		WMA04 - Clip Pair WMA05 - Pair of tamper-resistant Clips

Job Name/Date:

Fixture Type Designation:


## SUGGESTED POWER SUPPLIES

24VDC - RGBW

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00288-P24</a>	DMX / RDM (Field Addressable) / DALI	120-277VAC to 24VDC, 100W, Class 2, Dry	1 - 3


For other power supply options consult factory.

## ACCESSORIES - Installation (REQUIRED)




### WMA04

Clips Pair

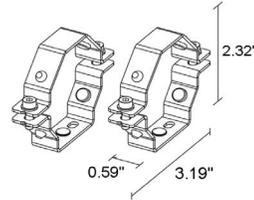

### WMA05

Pair of temper-resistant clips

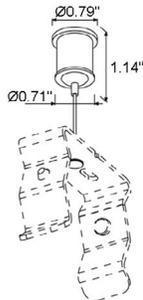

### WMA07

Suspension Kit

## ACCESSORIES

Controllers (RGBW)



### [PPWD00570](#) - RGBW DMX512+Wifi Controller

Touch Sensitive

Can be controlled by WiFi

Controls 3 zones synchronously and separately


Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 441.7

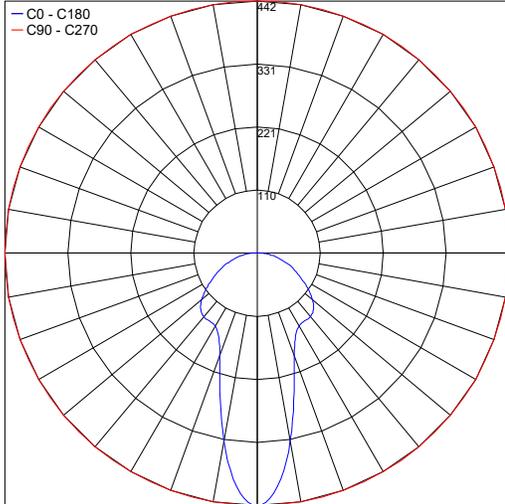


PHOTOMETRIC FILENAME : TREVI\_2.6\_W\_39X95\_3000K\_25W\_24VDC.IES

Maximum Candela = 267.1

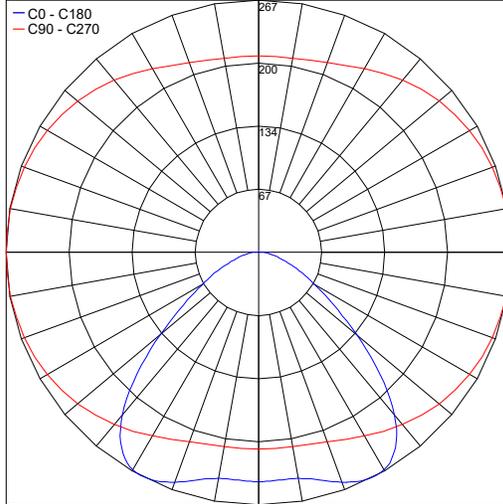


PHOTOMETRIC FILENAME : TREVI\_2.6\_D\_3000K\_25W\_24VDC.IES

Maximum Candela = 975

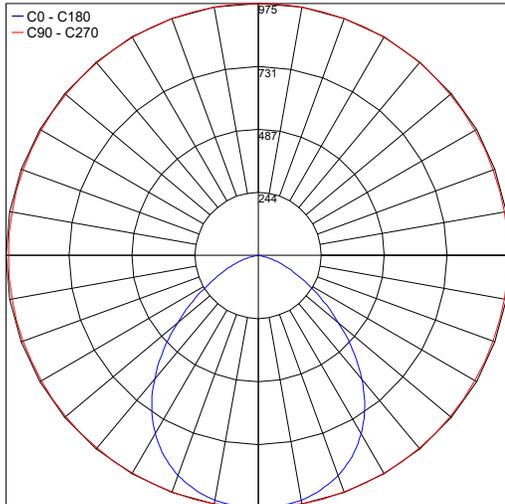

PHOTOMETRIC FILENAME : TREVI\_2.6\_W\_39X95\_RGBW\_25W\_24VDC.IES

Maximum Candela = 539.7

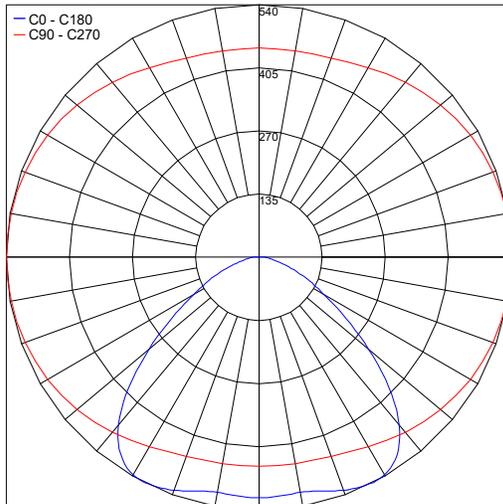

PHOTOMETRIC FILENAME : TREVI\_2.6\_D\_RGBW\_25W\_24VDC.IES

Job Name/Date:

Fixture Type Designation: