

CUP BOLLARD - Ø2.8" Pole

CUP is a collection designed by Giuseppe Maurizio Scutellà that includes a wall mount, bollard and pole mounted version with an efficient, cylindrical, minimalist design, ready to be installed outdoors on different types of pole or the wall. It is available with 180° or 360° light beam, and 2 standard finishes. CUP BOLLARD Ø2.8" Pole comes in 2 heights, with 5W or 7W. Dark Sky compliant.

TECHNICAL DATA


Wattage	5.4W (180°, h 10.71") 5.2W (360°, h 10.71") 7.6W (180°, h 23.70") 7.4W (360°, h 23.70")
Power Supply	Integral 120VAC
Construction	Housing: Die-Cast Aluminum Lens: Extra Clear Tempered Glass
CCT	2000K, 3000K, 4000K
BUG Rating	—
CRI	>80
Delivered Lumens	440 lm (3000K, 180°, h 10.71") 435 lm (3000K, 360°, h 10.71") 605 lm (3000K, 180°, h 23.70") 595 lm (3000K, 360°, h 23.70") Dark Sky compliant
Efficacy	81.5 lm/W (3000K, 180°, h 10.71") 83.7 lm/W (3000K, 360°, h 10.71") 79.6 lm/W (3000K, 180°, h 23.70") 80.4 lm/W (3000K, 360°, h 23.70")
Optics	180°, 360°
Finishes	Anthracite, Gray Aluminum
Lumen Maintenance	L80, B10, 41,000 hrs (Ta 40°C)
Fixture Dimensions	See page 2
IP Rating	IP66
Impact Resistance	IK10



F63501 / F63502



F63507 / F63508

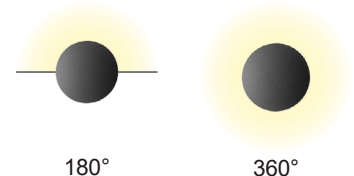

Fixture Dimensions - See page 2

ORDERING INFORMATION

Example: F63501.1.2.64.US. Accessories ordered separately.


				.US
Model No.	Finish	CCT	Optics	
F63501 (ON/OFF - 10.7" h)	1 - Anthracite (Dark Sky Compliant)	2 - 2700K (on request)	64 - 180°	.US
F63502 (DALI - 10.7" h)	4 - Gray Aluminum (requires Anti Pollution Cover - see page 2)	3 - 3000K	67 - 360°	
F63507 (ON/OFF - 23.7" h)		4 - 4000K		
F63508 (DALI - 23.7" h)				

Job Name/Date:


Fixture Type Designation:

CUP BOLLARD - Ø2.8" Pole


FIXTURE DIMENSIONS

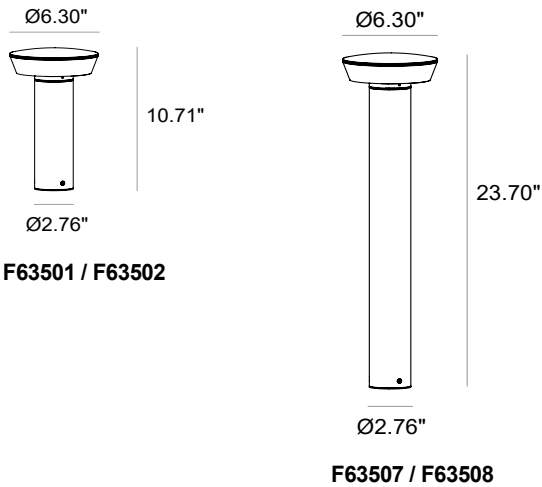

ACCESSORIES - Installation / Light Pollution




A9947
Flange for concrete
(Bollard Ø2.76")



A9949
Anti-lighting pollution cover
for gray aluminum finishing
(Bollard Ø2.76" / 3.94")

SUGGESTIONS FOR BOLLARD INSTALLATION

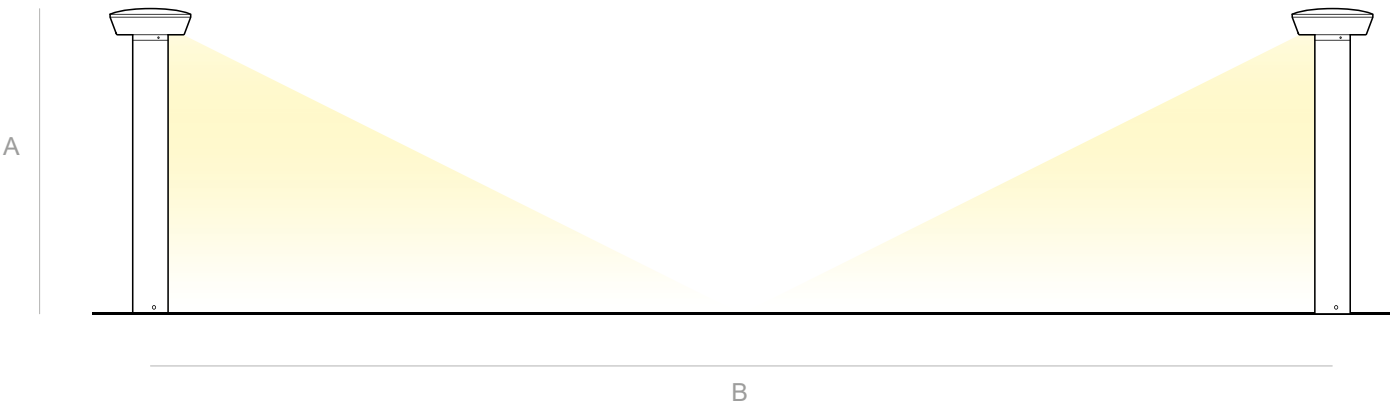

Emission 180°

A = 2.95'	B = 14.11'	2.0 fc
A = 8.20'	B = 36.09'	1.6 fc

Emission 360°


A = 2.95'	B = 15.09'	1.9 fc
A = 8.20'	B = 28.87'	1.4 fc

Job Name/Date:

Fixture Type Designation:


CUP BOLLARD - Ø2.8" Pole

PHOTOMETRIC DATA - Note: All photometry is 3000K DALI - 10.7 INCH, 180°

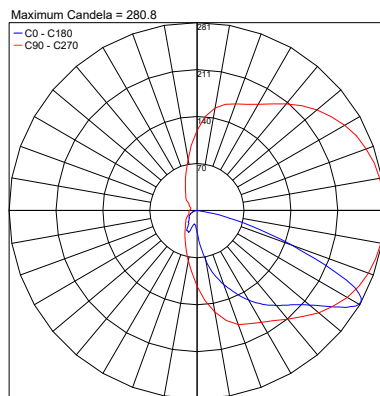


PHOTOMETRIC FILENAME : CUP BOLLARD Ø2.8 POLE 10.7IN DALI 30K 180° F63502.X.3.64.IES

10.7 INCH, 360°

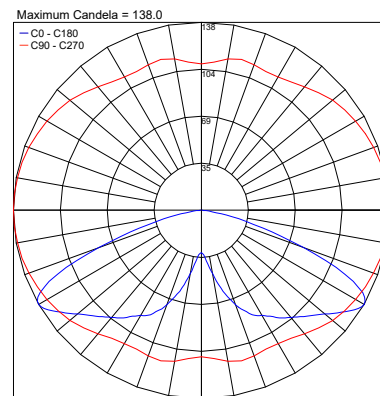


PHOTOMETRIC FILENAME : CUP BOLLARD Ø2.8 POLE 10.7IN DALI 30K 360° F63502.X.3.67.IES

ON / OFF - 10.7 INCH, 180°

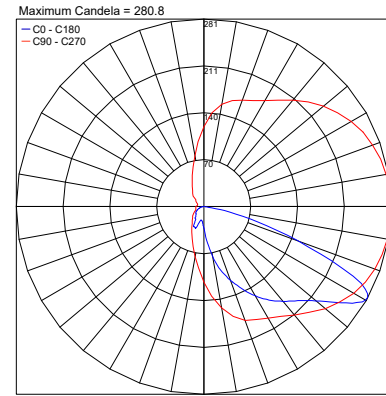


PHOTOMETRIC FILENAME : CUP BOLLARD Ø2.8 POLE 10.7IN ON-OFF 30K 180° F63501.X.3.64.IES

ON / OFF - 10.7 INCH, 360°

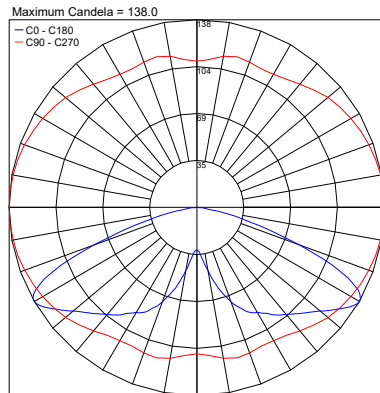


PHOTOMETRIC FILENAME : CUP BOLLARD Ø2.8 POLE 10.7IN ON-OFF 30K 360° F63501.X.3.67.IES

DALI - 23.7 INCH, 180°

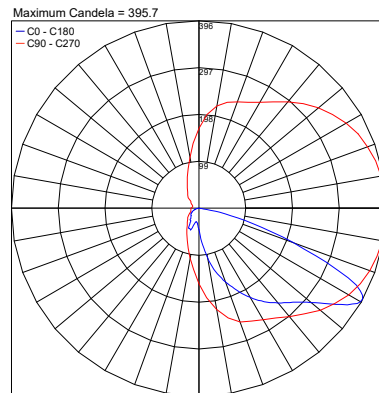


PHOTOMETRIC FILENAME : CUP BOLLARD Ø2.8 POLE 23.7IN DALI 30K 180° F63508.X.4.64.IES

23.7 INCH, 360°

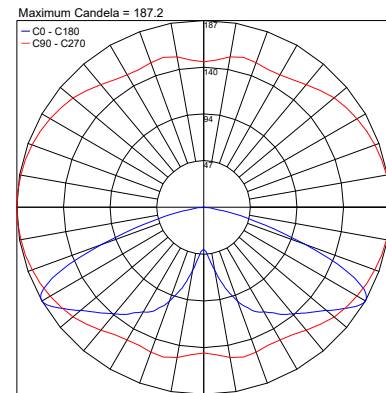


PHOTOMETRIC FILENAME : CUP BOLLARD Ø2.8 POLE 23.7IN DALI 30K 360° F63508.X.3.67.IES

ON/OFF - 23.7 INCH, 180°

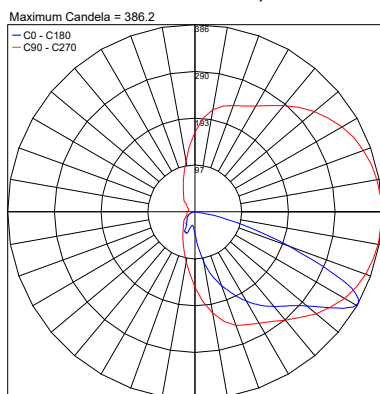

PHOTOMETRIC FILENAME : CUP BOLLARD Ø2.8 POLE 23.7IN ON-OFF 30K 180° F63507.X.3.64.IES

23.7 INCH, 360°

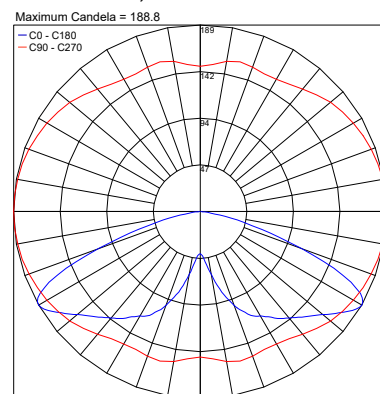

PHOTOMETRIC FILENAME : CUP BOLLARD Ø2.8 POLE 23.7IN ON-OFF 30K 360° F63507.X.3.67.IES

Job Name/Date:

Fixture Type Designation: