


CUP WALL


CUP is a collection designed by Giuseppe Maurizio Scutellà that includes a wall mount, bollard and pole mounted version with an efficient, cylindrical, minimalist design, ready to be installed outdoors on different types of pole or the wall. It is available with a 360° light beam, and 2 standard finishes. CUP WALL is the 5.2W wall mounted version.

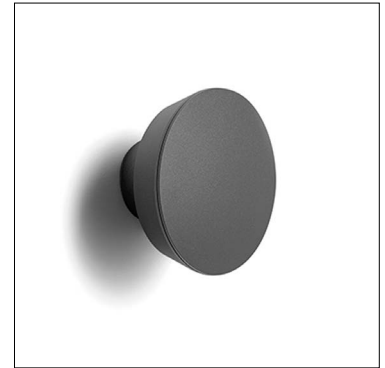

TECHNICAL DATA

Wattage	5.2W
Power Supply	Integral 120VAC
Construction	Housing: Die-cast Aluminum Lens: Extra Clear Tempered Glass
CCT	2000K, 3000K, 4000K
BUG Rating	—
CRI	>80
Delivered Lumens	435 lm (3000K)
Efficacy	83.7 lm/W
Optics	360°
Finishes	Anthracite, Gray Aluminum
Lumen Maintenance	L80, B10, 41,000 hrs (Ta 40°C)
Fixture Dimensions	Ø6.30" x 3.46"
IP Rating	IP66
Impact Resistance	IK10

Fixture Dimensions

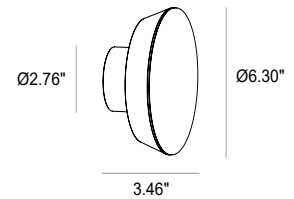

ORDERING INFORMATION

Example: F33501.1.2.64.US.

			67	.US
Model No.	Finish	CCT	Optics	
F33501 (ON/OFF)	1 - Anthracite	2 - 2700K (on request)	67 - 360°	.US
F33502 (DALI)	4 - Grey Aluminum	3 - 3000K 4 - 4000K		

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA

Note: All photometry is 3000K

DALI


Maximum Candela = 138.0

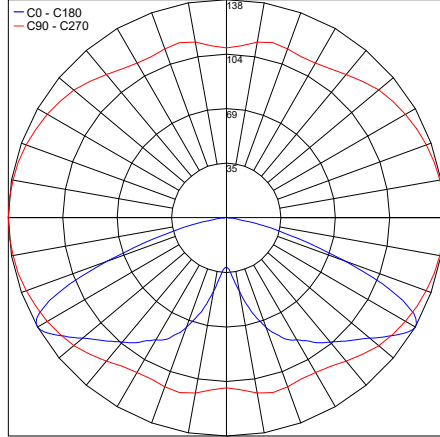

PHOTOMETRIC FILENAME : CUP WALL DALI 30K 360° F33502.X.3.67.IES

ON/OFF

Maximum Candela = 138.01

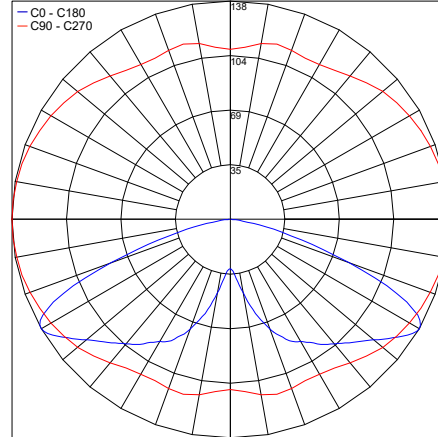

PHOTOMETRIC FILENAME : CUP WALL ON-OFF 30K 360° F33501.X.3.67.IES

Job Name/Date:

Fixture Type Designation: