

EASY LINE - Total Light LLTW2


EASY LINE is a vertical, bendable LED strip that is IP65-IP68 rated ideal for fountains or swimming pools for panel installation in reinforced concrete with tiles or pool liner. It is available in Transparent, Frost, Clear or Total Light with static white, tunable white or RGB, and guarantees protection against UV rays and the corrosive action of salt and sodium hypochlorite. EASY LINE Total Light has opal resin with an opal outercasing. **Not cuttable in the field.**



TECHNICAL DATA

Wattage	12W / 3.28 ft (1 m)
Power Supply	Remote Fountain/Pool Approved 24VDC Power Supply, not included. See page 2.
Construction	Body: Opal Polyurethane Resin Outercase: Opal PVC
CCT	2900K, 5400K (120+120 LED / 3.28')
CRI	85
Delivered Lumens	800 lm / 3.28 (1 m)
Efficacy	66.7 lm/W
Optics	120°
Fixture Dimensions	0.37" w x 0.26" h x Various Lengths
Bend Radius	2.36"
LED Source	SMD 3014
LED Spacing	120+120 LED per 3.28 ft (1 m), 0.17" between LEDs
Lumen Maintenance	L80, B10>50,000 hrs
Color Consistency	2-3-Step MacAdam
Operating Temp	-22°F to 131°F
IP Rating	IP65, IP68

Fixture Dimensions



NOT CUTTABLE IN THE FIELD

MUST USE SUITABLE APPROVED FOUNTAIN & SWIMMING POOL POWER SUPPLY WHICH IS REMOTELY MOUNTED

ORDERING INFORMATION

Example: LLTW2E-24.68.TL.X.US. Power Supplies / Accessories ordered separately.

LLTW2E	-	24	.		.	TL	.	X	.	US
Model No.		Power		IP Rating		Cable Exit				
LLTW2E - 120+120 LED / 3.28' (1 m)		24 - 24VDC		65 - IP65 68 - IP68		X - End Feed				US
<p>NOTE: Available in lengths up to 75 feet. Please specify length when ordering.</p>										

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC - **TO BE USED WITH FOUNTAIN / SWIMMING POOLS**

Part Number	Description	Input/Output	# of Fixtures
FPV-100110024	ELV / TRIAC & 0-10V Dimming (100 to 10%)	120-277VAC to 24VDC, 96W, Class 2, IP66, NEMA 4X	1-6
FPV-100000024	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, IP66, NEMA 4X	1-6
FPV-100100024	0-10V Dimming (2 Channels)	120-277VAC to 24VDC, 100W, Class 2, IP66, NEMA 4X	1-12

DRIVERS IN NEMA 4X ENCLOSURE - FOR INDOOR/OUTDOOR USE ONLY

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-6

Suggested Lutron Compatible - FOR INDOOR/OUTDOOR USE ONLY

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-2
PPLT00530	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-6


For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:


ACCESSORIES

Installation / Mounting for 0.37x0.26 inch

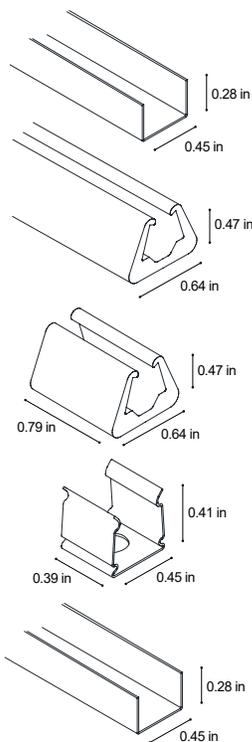


Code	Finishing	Description
PRO-AL-9.5x6.5-AL	Aluminum	Rigid guide L max 9.84 ft
OUT-S-9.5x6.5.W OUT-S-9.5x6.5.F	White Opal	Silicone profile
CLIP-S-9.5x6.5.W CLIP-S-9.5x6.5.F	White Opal	Silicone clip
CLIP-AC-9.5x6.5-AC	AISI 304 harmonic steel	Steel clip
PRO-AC-9.5x6.5-AC	AISI 316 harmonic steel	Rigid guide L max 8.20 ft

POWER CABLE EXIT / AREA WITH REDUCED LIGHT



Opposite side



X. End feed

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA

3100K

Maximum Candela = 72.4

— C0 - C180
— C90 - C270

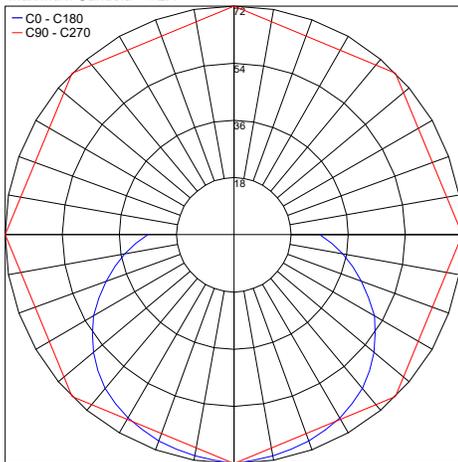


PHOTOMETRIC FILENAME : EASY LINE TOTAL LIGHT - LLTW2-24.68.TL.W 3100K.IES

4150K

Maximum Candela = 138.9

— C0 - C180
— C90 - C270

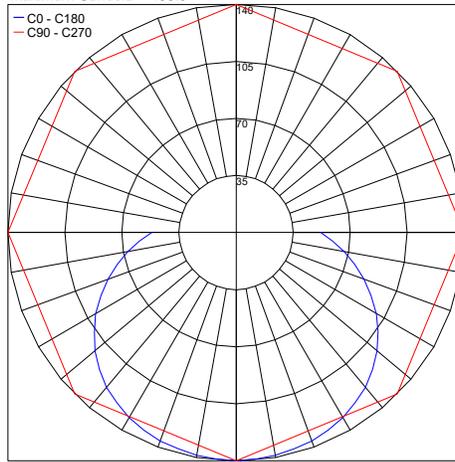


PHOTOMETRIC FILENAME : EASY LINE TOTAL LIGHT - LLTW2-24.68.TL 4150K.IES

5800K

Maximum Candela = 72.4

— C0 - C180
— C90 - C270

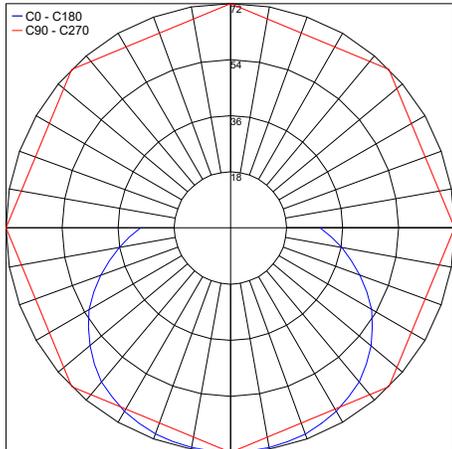

PHOTOMETRIC FILENAME : EASY LINE TOTAL LIGHT - LLTW2-24.68.TL.COLD 5800K.IES

Job Name/Date:

Fixture Type Designation: