


FLEA DOWNLIGHT RGBW

FLEA is a family of IP67-rated round or square recessed wall / in-grade or downlights available in static white, RGBW, and and underwater version (IP68). FLEA Downlight RGBW is offered round (Ø2.0") or square (2.0" sq.) with RGBW light, 2 optics options, and 3 standard finishes.



FLEA Downlight Round RGBW

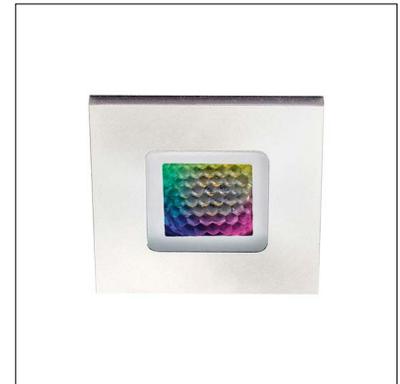

FLEA Downlight Square RGBW

Fixture Dimensions - See page 2

TECHNICAL DATA

Wattage	8W
Power Supply	Remote 24VDC, not included. See page 2
Construction	Housing: Anticorodal Aluminum Lens: Extra Clear Tempered Glass
CCT	RGBW
BUG Rating	—
Delivered Lumens	211 lm: (R) 28 lm, (G) 70 lm, (B) 17 lm, (W) 96 lm (6500K)
Efficacy	26.4 lm/W: (R) 3.5 lm/W lm, (G) 8.8 lm/W, (B) 2.1 lm/W, (W) 12 lm (6500K)
Optics	30°, Diffuse
Finishes	Anodized Matte Black, Anodized Aluminum, AISI 316L Stainless Steel
Lumen Maintenance	90,000 hrs, L90 (Ta 35°C)
Fixture Dimensions	See page 2
IP Rating	IP67
Impact Resistance	IK10

ORDERING INFORMATION


Example: F20135.3.5.02.US. Power Supplies / Accessories ordered separately.

		5		US
Model No.	Finish	CCT	Optics	
F20135 - Round	3 - Anodized Matte Black	5 - RGB+W	02 - Medium 30°	US
F20136 - Square	5 - Anodized Aluminum		05 - Diffuse	
	6 - AISI 316L Stainless Steel			


Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS



FLEA Downlight Round



FLEA Downlight Square

SUGGESTED POWER SUPPLIES


24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00288-P	DMX / RDM (Field Addressable) / DALI	120-277VAC to 24VDC, 100W, Class 2, DRY	1-10

For other power supply options consult factory.

ACCESSORIES

Anti-Glare



A1007

Honeycomb Screen

Order together with the product

ACCESSORIES

Controllers (RGBW)



[PPWD00570](#) - RGBW DMX512+Wifi Controller

Touch Sensitive

Can be controlled by WiFi

Controls 3 zones synchronously and separately

Job Name/Date:

Fixture Type Designation: