


FLEA MAXI DOWNLIGHT RGBW

FLEA is a family of IP67-rated round or square recessed wall / in-grade or downlights available in static white, RGBW, and and underwater version (IP68). FLEA MAXI Downlight RGBW is offered round (Ø3.2") or square (3.2" sq.) with RGBW light, 5 optics options, and 3 standard finishes.



FLEA MAXI Downlight Round RGBW

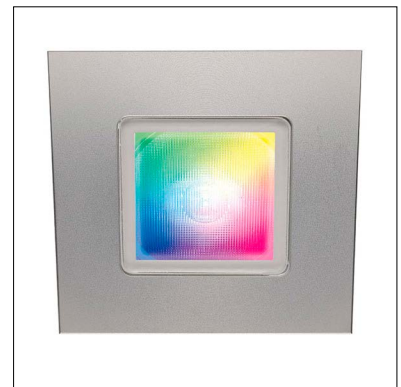

FLEA MAXI Downlight Square RGBW

Fixture Dimensions - See page 2

TECHNICAL DATA

Wattage	12W
Power Supply	Remote 24VDC, not included. See page 2
Construction	Housing: Anticorodal Aluminum Lens: Extra Clear Tempered Glass
CCT	RGBW
BUG Rating	—
Delivered Lumens	253 lm: (R) 33 lm, (G) 84 lm, (B) 20 lm, (W) 116 lm (6500K)
Efficacy	21.1 lm/W: (R) 2.8 lm/W lm, (G) 7 lm/W, (B) 1.7 lm/W, (W) 9.7 lm (6500K)
Optics	10°, 25°, 45°, 10°x40°, Diffuse
Finishes	Anodized Matte Black, Anodized Aluminum, AISI 316L Stainless Steel
Lumen Maintenance	90,000 hrs, L90 (Ta 35°C)
Fixture Dimensions	See page 2
IP Rating	IP67
Impact Resistance	IK10

ORDERING INFORMATION


Example: F10159.3.5.05.US. Power Supplies / Accessories ordered separately.

		5		US
Model No.	Finish	CCT	Optics	
F20159 - Round	3 - Anodized Matte Black	5 - RGB+W	01 - Spot 10°	US
F20160 - Square	5 - Anodized Aluminum		05 - Diffuse	
	6 - AISI 316L Stainless Steel		36 - Medium 25°	
			32 - Wide 45°	
			38 - 10°x40°	


Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS



FLEA MAXI Downlight Round



FLEA MAXI Downlight Square


SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00288-P	DMX / RDM (Field Addressable) / DALI	120-277VAC to 24VDC, 100W, Class 2, DRY	1-6

For other power supply options consult factory.

ACCESSORIES



A1008

Honeycomb Screen

Order together with the product

Job Name/Date:

Fixture Type Designation: