


KRILL TRACK

PROJECTORS FOR INDOOR APPLICATIONS

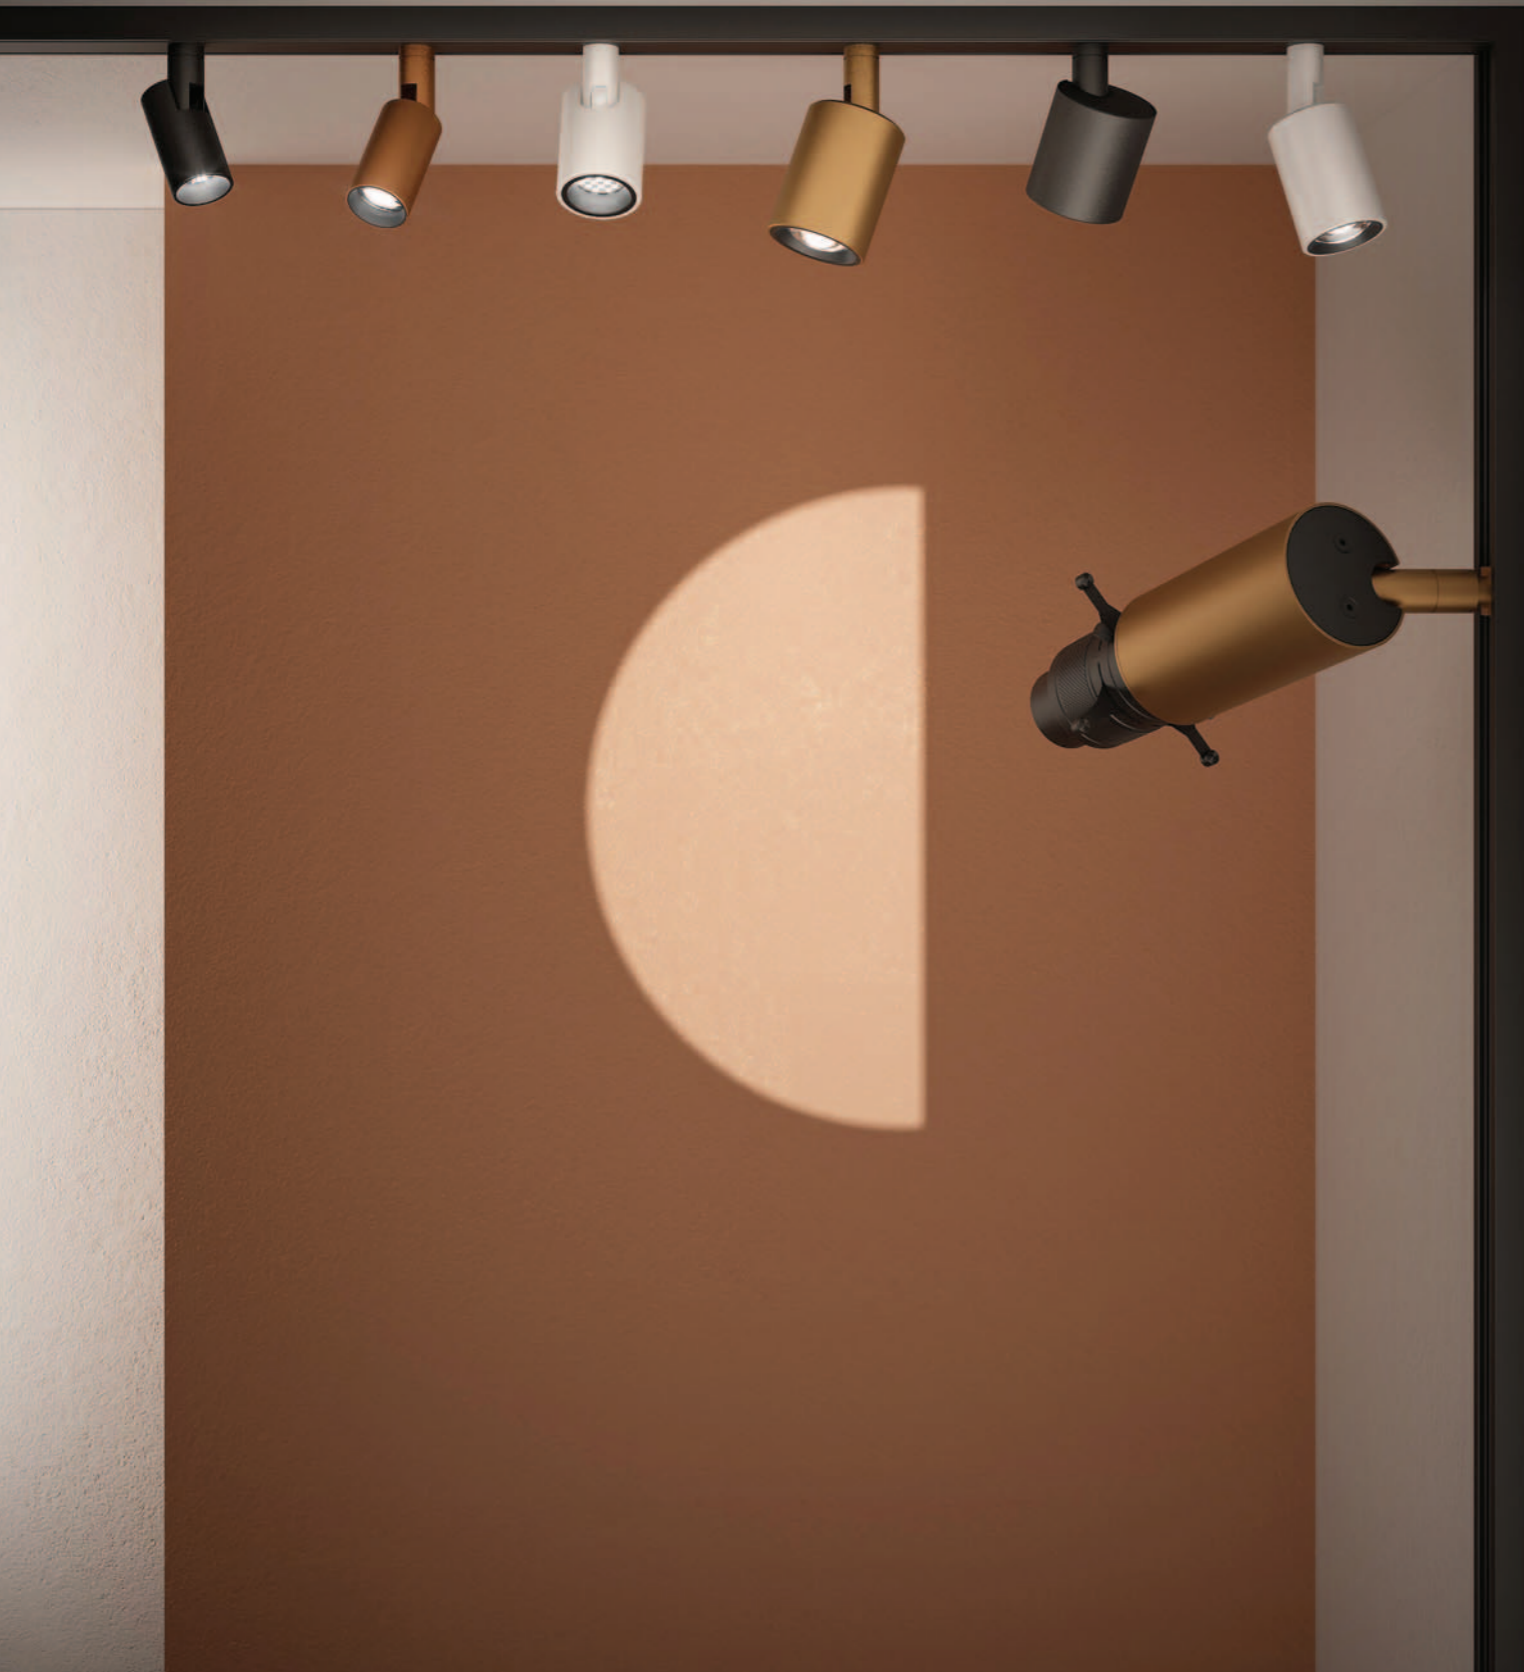

The elegance and compact size of the Krill collection in the Krill Track configuration meet the different lighting requirements of museum and retail spaces. They guarantee minimal visual impact in situations where space is at a premium, such as display cases and alcoves. The track is only 0.75 in wide and can be surface mounted or recessed flush with the wall or ceiling; the connection accessories enable continuous ceiling-to-wall and wall-to-wall installation, as well as in straight or right-angled lines. The Krill Track collection is dimmable using the DALI-2 protocol and includes both the fixed focus versions and the adjustable zoom lens. As will Krill, it is also available with Light Shaper optics (Krill Track 4.5), which enable the projection of different light shapes with pin-sharp contours, as well as the use of customized gobos. The LED light sources' high color rendering index of CRI>90 guarantees maximum color fidelity for the objects being lit.

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

KRILL TRACK

2700K 3000K 4000K

48VDC; 48VDC DALI-2
max 1W up to max 10W
CRI 80
up to 725 lm (3000K, 48°)
Optics
Fixed: 8°, 14°, 16°, 17°, 23°, 25°, 33°, 36°, 42°, 48°
Elliptical: 21°x50°, 21°x55°, 23°x50°, 26°x40°, 40°x26°, 50°x21°, 50°x23°, 55°x21°
Optical range: 9°–70°, 18°–80°, 22°–64°, 17°–40°
Light shaper
IP40



Krill Track 3.0, 3000K, 5.5W, 42°, black.
Krill Track 4.5, 3000K, 10W, light shaper + gobo.

Ø0.71"	Ø0.98"	Ø1.18"	Ø1.77"
			
KRILL TRACK 1.0	KRILL TRACK 2.0	KRILL TRACK 3.0	KRILL TRACK 4.0
			
KRILL TRACK 1.4	KRILL TRACK 2.4	KRILL TRACK 3.4	KRILL TRACK 4.4
			
			KRILL TRACK 4.5

- Accessories:
- Recessed track
 - Surface-mounted track
 - Flexible connector
 - Vertical connector
 - Horizontal connector
 - Honeycomb louvre

