


Maniglia IP is a linear wall or ceiling mounted LED luminaire made of steel or brass that is suitable for outdoor installation. It creates a unique beam of linear light that is available in 2 color temperatures, and 2 standard finishes.

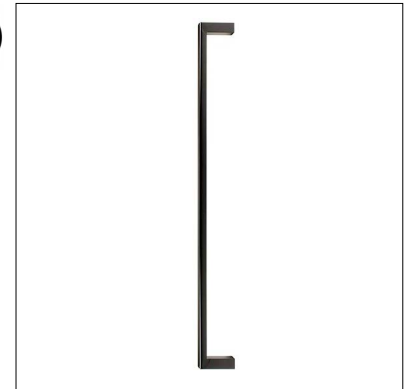

## TECHNICAL DATA

<b>Wattage</b>	14.4W (17.3W per 3.28 ft)
<b>Power Supply</b>	Remote 24VDC, not included. See page 2.
<b>Light Source</b>	Strip LED, Included - UL Listed
<b>Construction</b>	Body: Steel, Brass
<b>CCT</b>	2700K, 3000K
<b>CRI</b>	>90
<b>Delivered Lumens</b>	—
<b>Efficacy</b>	—
<b>Optics</b>	—
<b>Finishes</b>	Iron Painted, Bronze Painted, Corten Painted, Natural Brass
<b>Fixture Dimensions</b>	3.94" x 0.79" x 39.37" h
<b>IP Rating</b>	IP55

Fixture Dimensions



## ORDERING INFORMATION

Example: R70.107.7.27.US. Power supplies sold separately.

R70.107			US
Model No.	Finish	CCT	
R70.107	7 - Iron Painted 9 - Corten Painted 12 - Bronze Painted ON - Natural Brass	27 - 2700K 30 - 3000K	US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00680</a>	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 20W, Class 2, IP66	1-1
<a href="#">PPLT00685</a>	Non-Dim	120-277VAC to 24VDC, 25W, Class 2, IP67	1-1
<a href="#">PPLT00690</a>	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 40W, Class 2, IP67	1-2
<a href="#">PPLT00691</a>	Non-Dim	120-277VAC to 24VDC, 60W, Class 2, IP67	1-3
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-5

*For other power supply options consult factory.*

Job Name/Date:

Fixture Type Designation: