

PIVOT

PROJECTORS FOR OUTDOOR APPLICATIONS



The Pivot family is characterized by extreme compactness, which is ideal for blending seamlessly into architectural settings to enhance details. Pivot's wide range of optics includes very narrow 5° and 8° beams, and elliptical and sharp optics. The Pivot 2.0 and 3.0 versions also offer elliptical optics and zoom lens, both of which can be adjusted using a magnet.



Pivot Mini 1. 3000K, 3,5W, 15°, cor-ten.

PIVOT

2700K 3000K 4000K RGB

max 500mA; 24VDC
2.5W up to 25W
CRI 80 - 90
up to 1575 lm (3000K, 13°, CRI 90) 1818 lm (3000K, 13°, CRI 80)
Optics
Fixed: 5°, 8°, 11°, 13°, 15°, 17°, 20°, 21°, 25°, 29°, 33°, 34°, 35°, 37°, 42°, 43°, 45°, 54°, 58°, 59°
Sharp: 21°, 30°, 43°, 50°
Elliptical: 15°x47°, 22°x46°, 46°x16°, 46°x22°
Adjustable: 13°x68°, 12°x66°
Optical range: 15°-43°, 15°-38°
IP66 IK06 IK07 IK08

Ø0.98"

Ø1.57"

Ø2.36"

Ø3.15"



PIVOT MINI




PIVOT 1.7
PIVOT 1.8 (RGB)



PIVOT 2.0



PIVOT 3.0

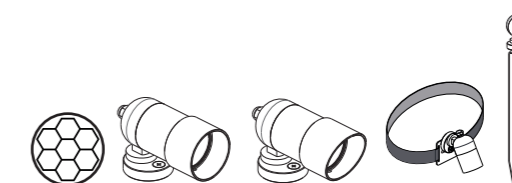

- Accessories:
- Honeycomb louvre
 - Standard snoot
 - Asymmetrical snoot
 - Spike