

# MIDI LINE - Side Light LL10


MIDI LINE is an easy to install, horizontal, bendable LED strip that is IP65/ IP68-rated making it ideal for swimming pools or fountains for panel installation in reinforced concrete with tiles or pool liner or indoor/outdoor areas. It is available in Side, Top or Total Light with static white, tunable white or RGB. White PVC outercase and opal resin guarantee protection against UV rays and the corrosive action of salt and sodium hypochlorite. **Not cuttable in the field.**



## TECHNICAL DATA

<b>Wattage</b>	11W / 3.28 ft (1 m)	
<b>Power Supply</b>	Remote Fountain/Pool Approved 24VDC Power Supply, not included. See page 2.	
<b>Construction</b>	Body: Opal Polyurethane Resin	
<b>CCT</b>	2700K, 3150K, 4300K, 5250K (204 LED / 3.28') Warm White on request: 2000K, 2400K, 2700K	
<b>CRI</b>	85	
<b>Delivered Lumens</b>	385 lm / 3.28' (2700K) 470 lm / 3.28' (3150K)	415 lm / 3.28' (4300K) 405 lm / 3.28' (5250K)
<b>Efficacy</b>	35 lm/W (2700K) 42.7 lm/W (3150K)	37.7 lm/W (4300K) 36.8 lm/W (5250K)
<b>Optics</b>	120°	
<b>Fixture Dimensions</b>	0.43" w x 0.39" h x Various Lengths	
<b>LED Source</b>	SMD 3014	
<b>LED Spacing</b>	204 LED per 3.28 ft (1 m), 0.20" between LEDs	
<b>Lumen Maintenance</b>	L80, B10>50,000 hrs	
<b>Color Consistency</b>	2-3-Step MacAdam	
<b>Operating Temp</b>	-22°F to 131°F	
<b>IP Rating</b>	IP65, IP68	

Fixture Dimensions



**NOT CUTTABLE IN THE FIELD**

## ORDERING INFORMATION

Example: LL10-N.24.68.DS.US. Power Supplies / Accessories ordered separately.

LL10	-		.	24	.		.	DS	.	US
Model No.	CCT		Power	IP Rating						
LL10 - 204 LED / 3.28' (1 m)	V - 2700K	Warm White	24 - 24VDC	65 - IP65	DS			DS		US
	W - 3150K	On Request		68 - IP68						
	N - 4300K	V8 - 2000K								
	C - 5250K	V2 - 2400K								
		V5 - 2700K								

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC - **TO BE USED WITH FOUNTAIN / SWIMMING POOLS**

Part Number	Description	Input/Output	# of Fixtures
<a href="#">FPV-100110024</a>	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 100W, Class 2, NEMA 4	1-6
<a href="#">FPV-100000024</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, NEMA 4	1-7
<a href="#">FPV-100100024</a>	0-10V Dimming (2 Channels)	120-277VAC to 24VDC, 100W, Class 2, NEMA 4	1-14

## SUGGESTED POWER SUPPLIES

24VDC - **TO BE USE FOR INDOOR/OUTDOOR USE - NOT Fountain / Swimming Pool**


Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00690</a>	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 40W, Class 2, IP67	1-2
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-7

Suggested Lutron Compatible - **FOR INDOOR/OUTDOOR USE ONLY**


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00273</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-2
<a href="#">PPLT00530</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-6

For other power supply options consult factory.


## ACCESSORIES - Installation




**PRO-AL-10x11-AL**  
Rigid Aluminum Outercase  
L=9.84'




**CLIP-S-8x9.5.F/W**  
Silicone Clip



**CLIP-AC-9.5x6.5-AC**  
Harmonic Steel Clip



**SNK-AC-10x11-AC**  
Flexible Steel Profile  
L=3.28'




**SNK2-AC-10x11-AC**  
Flexible Steel Profile for  
Plasterboard L = 3.28'

Job Name/Date:

Fixture Type Designation:

## POWER CABLE EXIT/AREA WITH REDUCED LIGHT

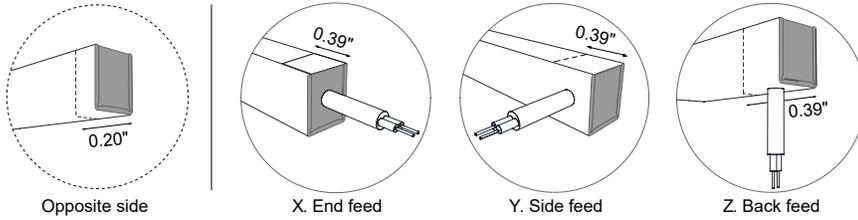

## CONNECTORS



### THB.381.A2A.R

Micro plug and socket connector.  
2PIN. male+female.  
IP68. Ø0.55" x 3.54".  
*Compatible for all models except RGB,  
RGBW and Tunable white.*



### THB.387.A4A.L.R

Micro plug and socket connector.  
4PIN. male+female.  
IP68. Ø0.91" x 4.45".  
*Compatible for all models except RGBW.*



### THB.391.A4A.L.R

Mini In-line circular joint connector.  
4PIN. male+female.  
IP68. Ø0.91" x 3.74".  
*Compatible for all models except RGBW.*



### THB.402.D4A.R

Connector type "T". 4PIN.  
IP68. Ø1.26" x 3.58" x 4.76".  
*Compatible for all models except RGBW.*



### THB.209.A4A

Junction box type "H". 4PIN.  
IP68. 4.25" x 2.56" x 1.10".  
*Compatible for all models except RGBW.*



### THB.399.D4E

Connector type "Y". 4PIN.  
IP68. Ø1.26" x 2.48" x 7.09".  
*Compatible for all models except RGBW.*



### THB.392.A4A

Connector type "H". 4PIN.  
IP68. Ø1.10" x 2.13" x 3.15".  
*Compatible for all models except RGBW.*



### THB.390.C1A

Connector type "T". 3PIN.  
IP68. Ø1.26" x 3.62" x 2.87".  
*Compatible for all models except RGB and RGBW.*

Job Name/Date:

Fixture Type Designation:


# MIDI LINE - Side Light LL10

## PHOTOMETRIC DATA

### 2700K

Maximum Candela = 101.3

— C0 - C180  
— C90 - C270

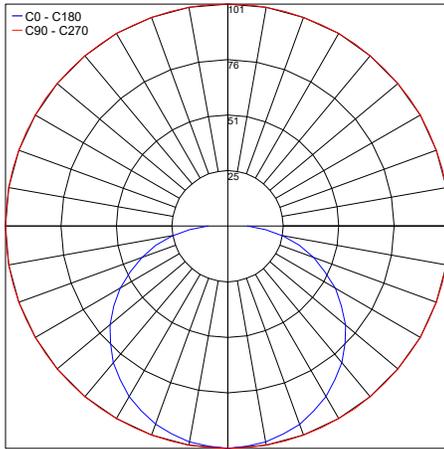


PHOTOMETRIC FILENAME : MIDI LINE SIDE LIGHT LL10 2700K - LL10.SVF24-6568.DS.IES

### 3150K

Maximum Candela = 59.7

— C0 - C180  
— C90 - C270

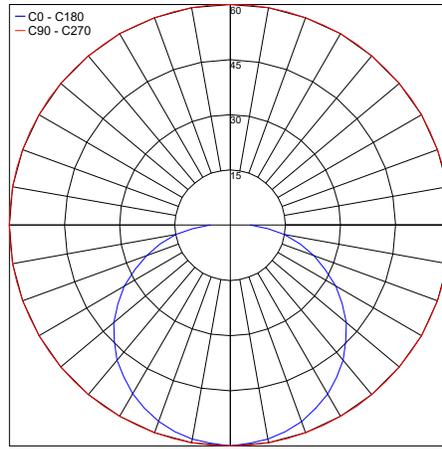


PHOTOMETRIC FILENAME : MIDI LINE SIDE LIGHT LL10 3150K - LL10.SWF24-6568.DS.IES

### 4300K

Maximum Candela = 109.7

— C0 - C180  
— C90 - C270

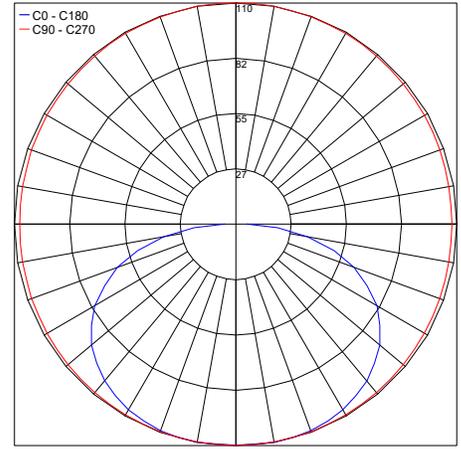


PHOTOMETRIC FILENAME : MIDI LINE SIDE LIGHT LL10 4300K - LL10.SNF24-6568.DS.IES

### 5250K

Maximum Candela = 106.1

— C0 - C180  
— C90 - C270

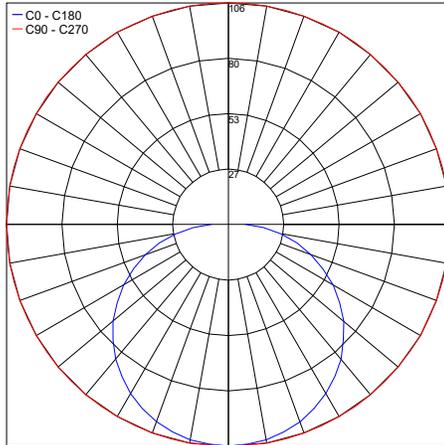

PHOTOMETRIC FILENAME : MIDI LINE SIDE LIGHT LL10 5250K - LL10.SCF24-6568.DS.IES

Job Name/Date:

Fixture Type Designation: