


Nothing is a recessed, continuous line modular system made of Coral<sup>®</sup> that is suitable for indoor installation. The integration with the surface it is installed upon allows the possibility to define architectural spaces and volumes on ceilings while it emits a 2.4" visible line of light. The particular overlapping of light sources avoids any kind of shadow cone, for a uniform and evocative effect.

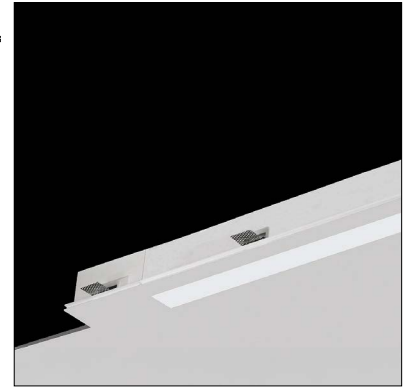


## TECHNICAL DATA

|                           |   |
|---------------------------|---|
| <b>Wattage</b>            | 21W   |
| <b>Power Supply</b>       | Remote 24VDC, not included. See page 2.             |
| <b>Construction</b>       | Body: Coral <sup>®</sup>                            |
| <b>CCT</b>                | 3000K<br>(2700K on request)                         |
| <b>CRI</b>                | >90   |
| <b>Delivered Lumens</b>   | 2100 lm   |
| <b>Efficacy</b>           | 100 lm/W  |
| <b>Optics</b>             | 120° Wide   |
| <b>Finishes</b>           | Coral <sup>®</sup> - Unfinished                     |
| <b>Fixture Dimensions</b> | 31.5" l x 5.1" x 3.2"                               |
| <b>Cut-out Dimension</b>  | 31.50" for each module installed<br>+ 6.30" x 5.51" |
| <b>Fixture Weight</b>     | 7.72 lbs  |
| <b>IP Rating</b>          | IP40 / IP20   |

### Fixture Dimensions

#### Ceiling Recessed Downlight

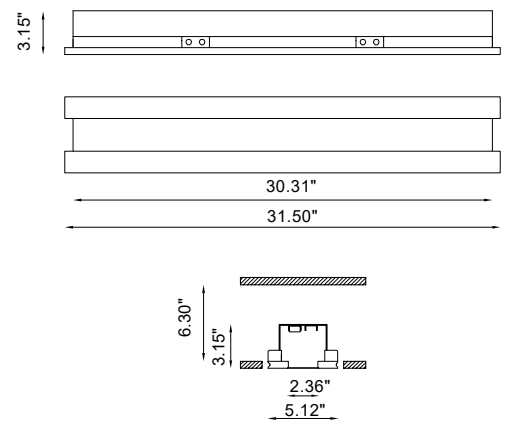

**NOTE:** Attention, the code 9010.00 / 9013.00 must be installed for multiples of 31.50" and cannot be cut

## ORDERING INFORMATION

Example: BU9010.00.90.30.US + BU9018 (Light Source). Accessories / Power Supplies ordered separately.

|   |                         |               |                          |    |
|---|-------------------------|---------------|--------------------------|----|
|   | 00                      | 90            |                          | US |
| <b>Model No. - Body Frame</b>                       | <b>Finish</b>           | <b>Optics</b> | <b>CCT</b>               |    |
| BU9010 + BU9018 - Recessed Downlight / Light Source | 00 - Coral <sup>®</sup> | 90°           | 22 - 2200K<br>30 - 3000K | US |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

| Part Number               | Description   | Input/Output                             | # of Fixtures |
|---------------------------|---|--|---------------|
| <a href="#">PPLT00284</a> | Non-Dim   | 120-277VAC to 24VDC, 100W, Class 2, DAMP | 1-3           |
| <a href="#">PPLT00543</a> | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W, Class 2       | 1-3           |

### Suggested Lutron Compatible

| Part Number               | Option       | Lutron SKU | Dim Range | Description                                   | Input/Output                      | # of Fixtures |
|---------------------------|--------------|------------|-----------|---|-----------------------------------|---------------|
| <a href="#">PPLT00530</a> | L3DAE / L3D0 | L3DA/L3D0  | 100%-1%   | Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver | 120-277VAC to 24VDC, 96W, Class 2 | 1-3           |

## DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

| Part Number               | Description                         | Input/Output                                | # of Fixtures<br>21W |
|---------------------------|-------------------------------------|---|----------------------|
| <a href="#">PPLT00715</a> | ELV / TRIAC / 0-10V Dimming to 0.1% | 120-277VAC to 24VDC, 96W, Class 2, WET/DAMP | 1-3                  |

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES

### BU9014

Pair of Closure Headparts (Required)  
For Ceiling Recessed versions

### BU9010

Light Source -  
For Ceiling Recessed versions

Choose length below with code



### BU9011. \_\_

Protection Shield


Choose one of the following lengths with code:

- .08** - 31.50 in      **.24** - 94.49 in
- .16** - 62.99 in      **.32** - 125.98 in

## PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 784.2

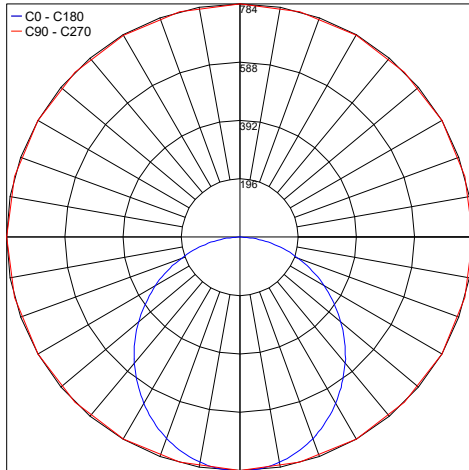

PHOTOMETRIC FILENAME : NOTHING 9018.US 21W 3000K.IES

Job Name/Date:

Fixture Type Designation: