

# NOTHING



## RECESSED FITTING WITH CONTINUOUS LINE, MINIMUM DIMENSIONS.




Nothing is an indoor continuous line modular system made of Coral<sup>®</sup> with a 2.36" visible line of light, whose integration with the surface it is installed upon allows the possibility to define architectural spaces and volumes both on walls and on ceilings, creating a perfect bond between light, architecture and emotion. The particular overlapping of light sources avoids any kind of shadow cone, for a uniform and evocative effect.



79 Trenton Avenue  
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710  
Fax: (908) 996-7042

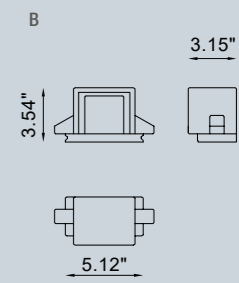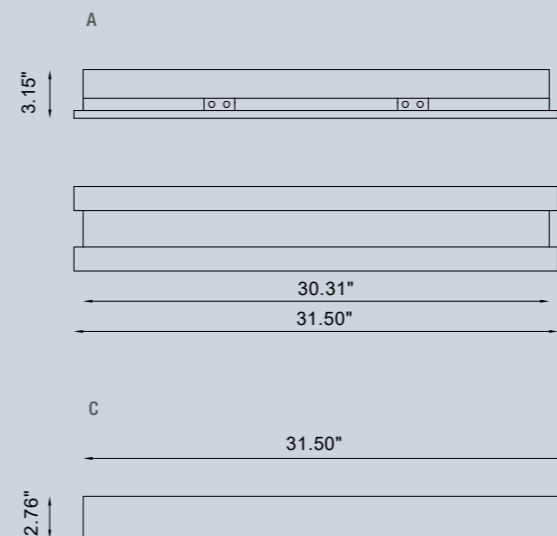

## Recessed

### TECHNICAL FEATURES | BODYFRAME

Code	BU9010.00 (fig. A)	BU9013.00 (fig. A)
Type	Downlight 90°	Wall recessed 90°
Material	00: Coral <sup>®</sup>	00: Coral <sup>®</sup>
Weight	7.72 lbs	7.72 lbs
Mounting	Ceiling recessed	Wall recessed
IP rating	IP40	IP40
Cut out for plasterboard	(31.50" for each module installed + 6.30") x 5.51"	(31.50" for each module installed + 6.30") x 5.51"
Light hole	(31.50" for each module installed ) x 2.36"	(31.50" for each module installed ) x 2.36"
Note	-	-

### TECHNICAL FEATURES | CLOSURE HEADPARTS



Code	BU9014.00 (fig. B)
Material	00: Coral <sup>®</sup>
Weight	2.65 lbs (couple)
Mounting	Wall and ceiling recessed
IP rating	-
Cut out for plasterboard	5.51" x 3.35"
Note	You need two headparts delivered as couple with a unique code BU9014.00 to close a continuous line of the NOTHING product (code BU9010.00 / BU9013.00).

### TECHNICAL FEATURES | PROTECTION SHIELD

Code	BU9011.08 (fig. C)	BU9011.16	BU9011.24	BU9011.32
Material	Satin polycarbonate	Satin polycarbonate	Satin polycarbonate	Satin polycarbonate
Dimensions	31.50" x 2.76"	62.99" x 2.76"	94.49" x 2.76"	125.98" x 2.76"
Note	-	-	-	-



## TECHNICAL FEATURES | LIGHT SOURCE

Code	<b>BU9018</b>
Type	Downlight 90°   Wall recessed 90° 
IP rating	IP20
Control gear	Constant voltage driver (not included)
Lamp type	LED 24V 
Lamp wattage	1 x 21W
Luminous efficacy	2100 lm
Light distribution	Wide beam 120°
Fitting	-
Light color	White 3000K White 2700K (on request)
Light hole	-
Voltage connection	-
CRI	By driver (optional)
Emergency	>90
Note	-

## EXAMPLE OF INSTALLATION

Note	Attention, the code 9010.00 / 9013.00 must be installed for multiples of 31.50" and cannot be cut
------	---