


Piattino Outdoor is an IP66-rated LED lamp made of a steel pole, aluminum cylinder, and brass base plate (steel spike on request) that creates an indirect light suitable for outdoor installation in gardens, patios, decks or pathways. It is available in 2 color temperatures and 2 standard finishes.



TECHNICAL DATA

Wattage / Input	4.5W (500mA)
Power Supply	Remote, not included. See page 2.
Light Source	LED Module
Construction	Rod: Steel Cylinder: Aluminum Base Plate: Brass (Steel Spike on Request)
CCT	2700K, 3000K
CRI	>80
Delivered Lumens	730 lm (3000K)
Efficacy	140 lm/W (3000K)
Optics	Medium
Finishes	Body: Corten Painted + Burnished Brass, Matte Black Painted Reflector: Matte White Painted Details: Natural Brass, Burnished Brass
Fixture Dimensions	Ø9.84" x 31.50" h
IP Rating	IP66

Fixture Dimensions

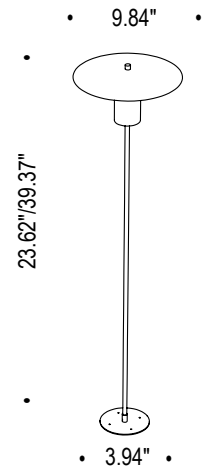

ORDERING INFORMATION

Example: R70.099.EST.M.1.ON.27.US. Power supplies sold separately.

R70.099.EST		1			US
Model No.	Body Finish	Reflector Finish	Details Finish	CCT	
R70.099.EST	M - Corten Painted + Burnished Brass 2 - Matte Black Painted	1 - Matte White Painted	ON - Natural Brass ONB - Burnished Brass	27 - 2700K 30 - 3000K	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming (to 1.0%)	120-277VAC to 500mA, 10W, Class 2, DAMP	1-2
PPLT00527	Phase Dim (120V only)	120VAC to 500mA, 25W, Class 2, IP66	3-5
PPLT00262	Leading/Trailing Edge Dimming to 10% (120V only)	120VAC to 500mA, 32W, Class 2	3-5
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-6
PPLT00561-P	0-10V Dimming to 0.1% (4 Channels)	120-277VAC to 500mA, 100W, Class 2	1-6

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00259	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ OR 1% 3-Wire LED Driver	120-277VAC to 500mA, 10W, Class 2	1-2
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ OR 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	2-4
PPLT00676	PEQE	PEQ0	100%-0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ Fade to Black	120-277VAC to 500mA, 20W, Class 2	2-4
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ OR 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	4-6

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation: