

# PIATTINO OUTDOOR


Piattino Outdoor is an IP66-rated LED lamp made of a steel pole, aluminum cylinder, and brass base plate (steel spike on request) that creates an indirect light suitable for outdoor installation in gardens, patios, decks or pathways. It is available in 2 color temperatures and 2 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	4.5W (500mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Light Source</b>	LED Module
<b>Construction</b>	Rod: Steel Cylinder: Aluminum Base Plate: Brass (Steel Spike on Request)
<b>CCT</b>	2700K, 3000K
<b>CRI</b>	>80
<b>Delivered Lumens</b>	730 lm (3000K)
<b>Efficacy</b>	140 lm/W (3000K)
<b>Optics</b>	Medium
<b>Finishes</b>	Body: Corten Painted + Burnished Brass, Matte Black Painted Reflector: Matte White Painted Details: Natural Brass, Burnished Brass
<b>Fixture Dimensions</b>	Ø9.84" x 31.50" h
<b>IP Rating</b>	IP66

Fixture Dimensions

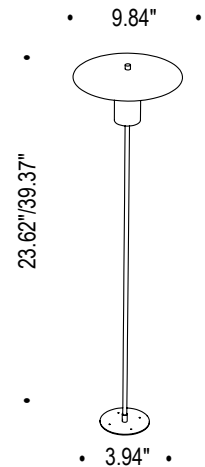

## ORDERING INFORMATION

Example: R70.099.EST.M.1.ON.27.US. Power supplies sold separately.

R70.099.EST		1			US
Model No.	Body Finish	Reflector Finish	Details Finish	CCT	
R70.099.EST	M - Corten Painted + Burnished Brass 2 - Matte Black Painted	1 - Matte White Painted	ON - Natural Brass ONB - Burnished Brass	27 - 2700K 30 - 3000K	US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00466-P</a>	0-10V Dimming (to 1.0%)	120-277VAC to 500mA, 10W, Class 2, DAMP	1-2
<a href="#">PPLT00527</a>	Phase Dim (120V only)	120VAC to 500mA, 25W, Class 2, IP66	3-5
<a href="#">PPLT00262</a>	Leading/Trailing Edge Dimming to 10% (120V only)	120VAC to 500mA, 32W, Class 2	3-5
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-6
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1% (4 Channels)	120-277VAC to 500mA, 100W, Class 2	1-20

### Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00259</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ OR 1% 3-Wire LED Driver	120-277VAC to 500mA, 10W, Class 2	1-2
<a href="#">PPLT00195</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ OR 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	2-4
<a href="#">PPLT00676</a>	PEQE	PEQ0	100%-0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ Fade to Black	120-277VAC to 500mA, 20W, Class 2	2-4
<a href="#">PPLT00180</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ OR 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	4-6

*For other power supply options consult factory.*

Job Name/Date:

Fixture Type Designation: