

SPOTTINO MINI


Spottino Mini is an adjustable IP66-rated LED cylinder lamp on a steel spike that is suitable for outdoor installation in gardens and yards. It is available in 2 color temperatures, 2 heights, and 4 standard finishes. Steel spike included.



TECHNICAL DATA

Wattage / Input	1.2W (350mA), 2.4W (500mA)
Power Supply	Remote, not included. See page 2.
Light Source	LED COB
Construction	Rod: Steel or Brass Cylinder: Aluminum or Brass
CCT	2700K, 3000K
CRI	>80
Delivered Lumens	—
Efficacy	—
Optics	25° Narrow
Finishes	Body: Iron Painted, Corten Painted, Bronze Painted, Natural Brass Details: Natural Brass, Burnished Brass
Fixture Dimensions	Ø1.38" x 3.94" h Ø1.38" x 13.78" h
IP Rating	IP66

Fixture Dimensions - see page 2

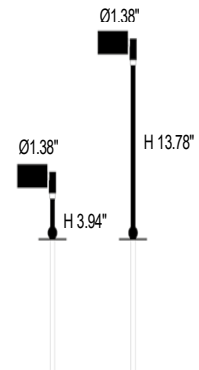

ORDERING INFORMATION

Example: R70.081.MINI.7.ON.27.US. Power supplies sold separately.

R70.081.MINI					US
Model No.	Wattage	Body Finish	Detail Finish	CCT	
R70.081.MINI	1 - 1.2W 2 - 2.4W	7 - Iron Painted 9 - Corten Painted 12 - Bronze Painted ON - Natural Brass	ON - Natural Brass ONB - Burnished Brass	27 - 2700K 30 - 3000K	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA - 1.2W version

Part Number	Description	Input/Output	# of Fixtures
PPLT00138	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	1-3
PPLT00536	Non-Dim	120-277VAC to 350mA, 4W, Class 2	3-3
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	2-9
PPLT00480-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 30W, Class 2, DAMP	1-16
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	7-14
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W, Class 2	1-68

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	3-5
PPLT00517	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	5-10
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	10-15

SUGGESTED POWER SUPPLIES

500mA - 2.4W version

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 10W, Class 2	1-4
PPLT00469	Phase Dim (120V only)	120VAC to 500mA, 14W, Class 2	4-5
PPLT00480-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 30W, Class 2, DAMP	1-12
PPLT00262	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	7-13
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 500mA, 100W, Class 2	1-40

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00259	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 10W, Class 2	3-4
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	5-7
PPLT00676	PEQOE	PEQO	100%-0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ Driver (F2B)	120-277VAC to 500mA, 20W, Class 2	4-8
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	10-11

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation: