



Tubolare is a thin line, suspended LED pendant made of steel with a black fabric wire and steel hanging cable that is suitable for indoor installation. It is available in 2 color temperatures and 4 standard finishes.

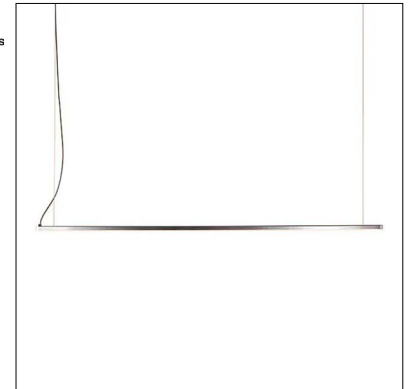

TECHNICAL DATA

Wattage	17.2W per 3.28 ft (1 m)
Power Supply	Remote 24VDC, not included. See page 2.
Light Source	StripLED
Construction	Body & Canopy: Steel Hanging Cable: Steel Wire: Black Fabric
CCT	2700K
CRI	>90
Delivered Lumens	—
Efficacy	—
Optics	—
Finishes	Matte Black Painted, Raw Black Iron, Iron Painted, Natural Brass
Fixture Dimensions	78.74" l x 0.98" h
IP Rating	IP20

Fixture Dimensions

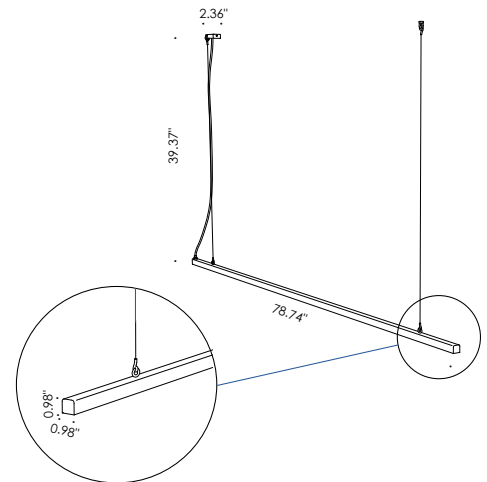

ORDERING INFORMATION

Example: R10.017.2.27.US. Power supplies sold separately.

R10.017			US
Model No.	Finish	CCT	
R10.017	2 - Matte Black Painted 3 - Raw Black Iron 7 - Iron Painted ON - Natural Brass	27 - 2700K 30 - 3000K	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00481	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-1
PPLT00690	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 40W, Class 2, IP67	1-1
PPLT00691	Non-Dim	120-277VAC to 24VDC, 60W, Class 2, IP67	1-2
PPLT00158	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-4
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-1
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-4

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation: